

NTP尾气软管

热塑软管

特别的设计保证了灵活性和柔软度，并且有很低的压降。他们能够抵抗所有的柴油和汽油废气的化学反应，并显示出机械应力方面的高阻抗。



可用于大多数常规应用

温度范围:

连续工作时: 最高温度 +150 ° C.

重量轻, 耐磨

品名	NTP尾气软管
软管类型	NTP



NTP尾气软管

产品名称	软管直径 (毫米)	软管长度 (米)	重量 (公斤)	产品编号
尾气软管 100 /7,5 NTP	100	7,5	0,8 kg/m	20805262
尾气软管 100/10,0 NTP	100	10	0,8 kg/m	20805362
尾气软管 125/7,5 NTP	125	7,5	0,98 kg/m	20805562
尾气软管 150/5,0 NTP	150	5	1,16 kg/m	20805662
尾气软管 150/7,5 NTP	150	7,5	1,16 kg/m	20805762
尾气软管 75/5,0 NTP	75	5	0,61 kg/m	20805062
尾气软管 100/5,0 NTP	100	5	0,8 kg/m	20805162
尾气软管 125/5,0 NTP	125	5	0,98 kg/m	20805462

软管类型	描述	温度范围, 摄氏度	管尾接头, 输送软管	管尾接头, 进气软管	盘管器, 输送软管	盘管器, 进气软管
NTP		up to 150				

NTP尾气软管

附件		产品编号
	Hose suspension, hard plastic 75 mm	20373615
	Hose suspension, hard plastic 100 mm	20373607
	Hose suspension, hard plastic 150 mm	20373609
	Hose suspension, hard plastic 125 mm	20373608
	快速抱箍 直径100mm(2件)	20374641
	连接套件 4\"	20375048
	Quick coupler, male, 100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, 150 incl. rubber sleeves and hose clip	20376017
	橡皮套, 管夹 3\"	20376474
	橡皮套, 管夹 4\"	20376475
	橡皮套, 盘管器夹紧 5\"	20376382
	橡皮套, 管夹 6\"	20376476
	Y形管, 100/100/100	20376647
	软管连接件 直径100mm	20947410
	软管接头 125 (5\"	20948710
	软管接头 150 (6\"	20948810
	Hose clip with rubber sleeve, pair 200	20373838
	变径套管 200mm-150mm	20374284
	快接头, 管径100 (4\"	20947710
	快接头, 管径100 (4\"	20948110
	快接头, 管径150 (6\"	20948310
	快接头, 管径125 (5\"	20947910

NTP尾气软管


附件		产品编号
	连接器套装 3"	20373286
	连接器套装 4"	20373287
	连接器套装 5"	20373288
	连接器套装 6"	20373289
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	Hose suspension, adjustable rubber 100 – 150 mm	20374530
	适配器用于3" 盘管器	20373128
	Quick safety coupler incl. rubber sleeves and hose clips, 100	20374541**
	Quick safety coupler incl. rubber sleeves and hose clips, 150	20374543**
	连接器 6"-5". 钢材质	20344353
	连接器 5"-4". 钢材质	20344354
	连接器, 4" -3" 钢材料,	20342483
	链接管 d=160	20371413
	安全联轴器 100 (4 ")	20373797
	安全联轴器 150 (6")	20373798

*当车辆驶出时，如果吸嘴与尾气管出于某些原因没有断开，而安全接头与软管却断开，

用钥匙环磨接头的一端，使其更易于连接，然后再将软管两端相连或断开两根软管的端头。

**Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.

NTP尾气软管

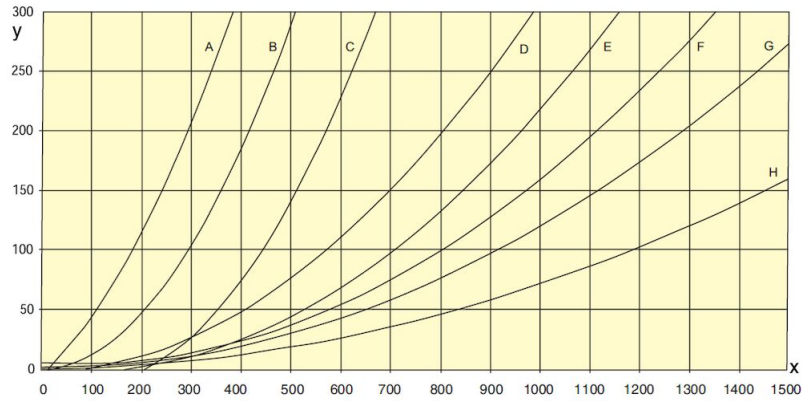

Y = Pressure drop Pa/m

X = Airflow m³/h

A= 75 mm (3") on reel

B= 75 mm (3") straight

C= 100 mm (4") on reel

D=125 mm (5") on reel

E= 100 mm (4") straight

F= 150 mm (6") on reel

G= 125 mm (5") straight

H= 150 mm (6") straight