

## NR-CP尾气软管

抗压橡胶软管

特别的设计保证了灵活性和柔软度，并且有很低的压降。他们能够抵抗所有的柴油和汽油废气的化学反应，并显示出机械应力方面的高阻抗。



可用于大多数崎岖且密集的使用。

温度范围:

连续工作时: +150 ° C.
















短时间使用温度: +170 ° C.

短期使用: +170° C

品名	NR-CP尾气软管
软管类型	NR-CP
技术数据声明	



## NR-CP尾气软管

[image]	软管直径 (毫米)	软管长度 (米)	重量 (公斤)	产品编号
	100	5	1,15 kg/m	20807962
	100	10	1,15 kg/m	20808162
	125	5	1,3 kg/m	20808362
	150	10	1,50 kg/m	20808962
	150	5	1,50 kg/m	20808762
	75	2,5	0,83 kg/m	20820162
	75	5	0,83 kg/m	20820262
	100	2,5	1,15 kg/m	20820362
	100	5	1,15 kg/m	20820462
	100	7,5	1,15 kg/m	20820562
	100	7,5	1,15 kg/m	20808062
	100	10	1,15 kg/m	20820662
	125	2,5	1,30 kg/m	20820762
	125	5	1,30 kg/m	20820862
	125	7,5	1,30 kg/m	20820962

## NR-CP尾气软管

[image]	软管直径 (毫米)	软管长度 (米)	重量 (公斤)	产品编号
	125	10	1,30 kg/m	20821062
	150	2,5	1,50 kg/m	20821162
	150	5	1,50 kg/m	20821262
	150	7,5	1,50 kg/m	20821362
	150	10	1,50 kg/m	20821462
	200	5	1,90 kg/m	20810762
	200	10	1,90 kg/m	20823962

软管类型	描述	温度范围, 摄氏度	管尾接头, 输送软管	管尾接头, 进气软管	盘管器, 输送软管	盘管器, 进气软管
NRCP	涤纶织物, EPDM/PP包覆。在EPDM聚酯螺旋盖。最大弯曲半径应 (内部)	-40 to +150 Deg. C (Intermittent +170 Deg. C)				

## NR-CP尾气软管

附件		产品编号
	Hose clip with rubber sleeve, pair 75	20342489
	Hose suspension, hard plastic 75 mm	20373615
	Hose suspension, hard plastic 100 mm	20373607
	Hose suspension, hard plastic 150 mm	20373609
	Hose suspension, hard plastic 125 mm	20373608
	Hose clip with rubber sleeve, pair 150	20331552
	Hose clip with rubber sleeve, pair 100	20342490
	Hose clip with rubber sleeve, pair 125	20342712
	Hose clip with rubber sleeve, pair 200	20373838
	快速抱箍 直径100mm(2件)	20374641
	连接套件 4\"	20375048
	Quick coupler, male, 100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, 150 incl. rubber sleeves and hose clip	20376017
	Y形管, 100/100/100	20376647
	软管连接件 直径100mm	20947410
	软管接头 125 (5\"	20948710
	软管接头 150 (6\"	20948810
	软管接头 200 (8\"	20948910
	Y适配器 3x4\" Nrcp 盘管器	20374276
	变径套管 200mm-150mm	20374284
	快接头, 管径100 (4\"	20947710
	快接头, 管径100 (4\"	20948110

## NR-CP尾气软管


附件		产品编号
	快接头, 管径150 (6"), 母	20948310
	快接头, 管径125 (5"), 公	20947910
	连接器套装 3"	20373286
	连接器套装 4"	20373287
	连接器套装 5"	20373288
	连接器套装 6"	20373289
	连接器套装 8"	20373290
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	Quick safety coupler incl. rubber sleeves and hose clips, 100	20374541**
	Quick safety coupler incl. rubber sleeves and hose clips, 150	20374543**
	连接器 6"-5". 钢材质	20344353
	连接器 5"-4". 钢材质	20344354
	连接器, 4" -3" 钢材料,	20342483
	Hose suspension, adjustable rubber 100 - 150 mm	20374530
	链接管 d=160	20371413

\*当车辆驶出时, 如果吸嘴与尾气管出于某些原因没有断开, 而安全接头与软管却断开,

用钥匙环磨接头的一端, 使其更易于连接, 然后再将软管两端相连或断开两根软管的端头。

\*\*Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.

## NR-CP尾气软管

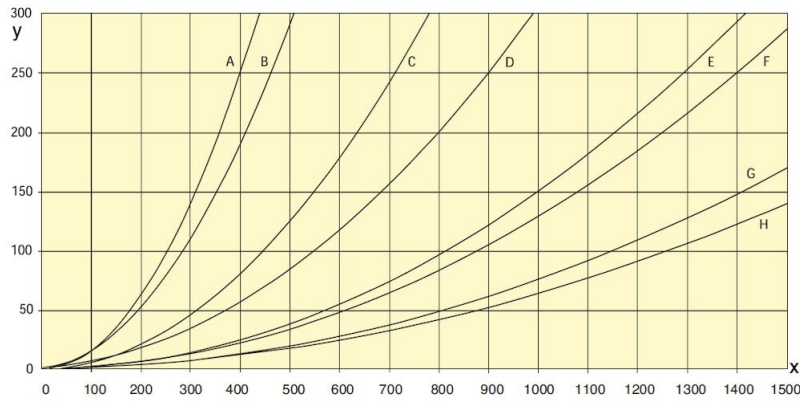

Y = Pressure drop Pa/m

X = Airflow m<sup>3</sup>/h

A= 75 mm (3" ) on reel

B= 75 mm (3" ) straight

D= 100 mm (4" ) straight

C= 100 mm (4" ) on reel

E=125 mm (5" ) on reel

F= 125 mm (5" ) straight

G= 150 mm (6" ) on reel

H= 150 mm (6" ) straight