

Exhaust Hose NFC-3

High temperature hose

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.



- Light weight and highly resistant to diesel particles.
- Temperature range:
Continuous use: +300 °C.
Short-term use: +350 °C.

| | |
|--------------|--------------------|
| Product name | Exhaust Hose NFC-3 |
| Type of hose | NFC-3 |
| Weight (kg) | 17,3 |



Exhaust Hose NFC-3



| Diameter, hose (mm) | Hose length (m) | Model |
|---------------------|-----------------|----------|
| 100 | 2,5 | 20822562 |
| 100 | 5 | 20822662 |
| 100 | 7,5 | 20822762 |
| 100 | 10 | 20822862 |
| 125 | 2,5 | 20822962 |
| 125 | 5 | 20823062 |
| 125 | 7,5 | 20823162 |
| 125 | 10 | 20823262 |
| 150 | 2,5 | 20823362 |
| 150 | 5 | 20823462 |
| 150 | 7,5 | 20823562 |
| 150 | 10 | 20823662 |
| 200 | 10 | 20823862 |
| 200 | 5 | 20823762 |
| 200 | 7,5 | 20824862 |

| Hose type | Specification | Temperature range, °C | Hose fittings in free hose end, distribution hose | Hose fitting on free hose end, inlet hose | Hose connection on reel, distribution hose | Hose connection on reel, inlet hose |
|-----------|--|---|---|---|--|-------------------------------------|
| NFC3 | High temperature kevlar based material. Helix in galvanised steel. | -60 to +300 Deg. C (Intermittent +350 Deg. C) | | | | |


Exhaust Hose NFC-3

| | Accessory | Part No |
|--|---------------------------------------|----------|
|  | Rubber sleeve, hose clamp 4"NTP,2pc | 20376475 |
|  | Rubber sleeve,hose clamp 5" NTP 2pc | 20376382 |
| | Y-pipe Ø100/100/100 | 20376647 |
|  | Hose coupling 100 (4") | 20947410 |
|  | Hose coupling 125 (5") | 20948710 |
|  | Hose coupling 150 (6") | 20948810 |
|  | Hose coupling 200 (8") | 20948910 |
|  | Quick coupling D=100 (4") male | 20947710 |
|  | Quick coupling D=100 (4") female | 20948110 |
|  | Quick coupling D=150 (6") female | 20948310 |
|  | Quick coupling D=150 (6") male | 20947910 |
|  | Bend 4". | 20344591 |
|  | Bend 5". | 20344592 |
|  | Bend 6". | 20344593 |
|  | Reduction 200mm-150mm | 20374284 |
|  | Connector 6"-5". steel. | 20344353 |
|  | Connector 5"-4". steel. | 20344354 |
|  | Connector 4"-3". steel. | 20342483 |
| | Junction pipe d=160 | 20371413 |
|  | Safety coupling ø100 (4") | 20373797 |
|  | Hose suspension, hard plastic Ø125 mm | 20373608 |
|  | Hose suspension, hard plastic Ø100 mm | 20373607 |

Exhaust Hose NFC-3

| Accessory | | Part No |
|---|---------------------------------------|----------|
|  | Safety coupling ø150 (6") | 20373798 |
|  | Hose suspension, hard plastic Ø150 mm | 20373609 |

Exhaust Hose NFC-3

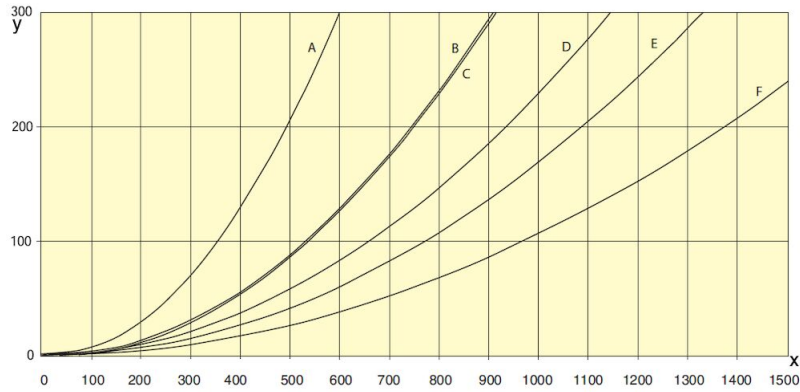

Y = Pressure drop Pa/m

X = Airflow m³/h

A= Ø100 mm (4") on reel

B= Ø100 mm (4") straight

C= Ø125 mm (5") on reel

D= Ø125 mm (5") straight

E= Ø150 mm (6") on reel

F= Ø150 mm (6") straight