

NFC-3尾气软管

耐高温软管

特别的设计保证了灵活性和柔软度，并且有很低的压降。他们能够抵抗所有的柴油和汽油废气的化学反应，并显示出机械应力方面的高阻抗。



重量轻和高度耐柴油微粒

温度范围:

连续工作时: +300 ° C.

短时间使用温度: +350 ° C.

短期使用: +350° C

品名	NFC-3尾气软管
软管类型	NFC-3
重量 (公斤)	17,3



NFC-3尾气软管

软管直径 (毫米)	软管长度 (米)	产品编号
100	2,5	20822562
100	5	20822662
100	7,5	20822762
100	10	20822862
125	2,5	20822962
125	5	20823062
125	7,5	20823162
125	10	20823262
150	2,5	20823362
150	5	20823462
150	7,5	20823562
150	10	20823662
200	10	20823862
200	5	20823762
200	7,5	20824862

软管类型	描述	温度范围, 摄氏度	管尾接头, 输送软管	管尾接头, 进气软管	盘管器, 输送软管	盘管器, 进气软管
NFC3	高温纤维基材料。镀锌钢螺旋。	-60 to +300 Deg. C (Intermittent +350 Deg. C)				


NFC-3尾气软管

附件		产品编号
	橡皮套, 管夹 4"NTP, 2 件	20376475
	橡皮套, 盘管器夹紧 5" NTP, 2 件	20376382
	Y 形管, 100/100/100	20376647
	软管连接件 直径100mm	20947410
	软管接头 125 (5")	20948710
	软管接头 150 (6")	20948810
	软管接头 200 (8")	20948910
	快接头, 管径100 (4") , 公	20947710
	快接头, 管径100 (4") , 母	20948110
	快接头, 管径150 (6") , 母	20948310
	快接头, 管径125 (5") , 公	20947910
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	变径套管 200mm-150mm	20374284
	连接器 6"-5". 钢材质	20344353
	连接器 5"-4". 钢材质	20344354
	连接器, 4" -3" 钢材质,	20342483
	链接管 d=160	20371413
	安全联轴器100 (4 ")	20373797
	Hose suspension, hard plastic 125 mm	20373608
	Hose suspension, hard plastic 100 mm	20373607

NFC-3尾气软管

附件		产品编号
	安全联轴器 150 (6")	20373798
	Hose suspension, hard plastic 150 mm	20373609

NFC-3尾气软管

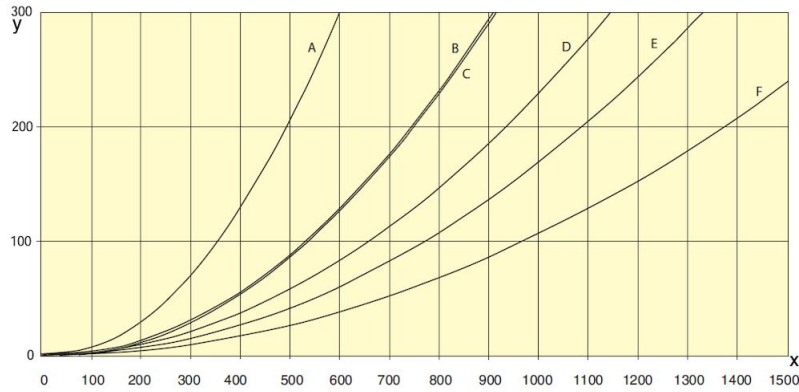

Y = Pressure drop Pa/m

X = Airflow m³/h

A= 100 mm (4") on reel

B= 100 mm (4") straight

C=125 mm (5") on reel

D= 125 mm (5") straight

E= 150 mm (6") on reel

F= 150 mm (6") straight