

NFC-6.5尾气软管

超耐高温软管



特别的设计保证了灵活性和柔软度，并且有很低的压降。他们能够抵抗所有的柴油和汽油废气的化学反应，并显示出机械应力方面的高阻抗。

石棉和无硅耐高温织物

温度范围:

连续工作时: +650 ° C.

短时间使用温度: +750 ° C.

短期使用: +750° C

品名	NFC-6.5尾气软管
软管类型	NFC-6,5




NFC-6.5尾气软管

软管直径 (毫米)	软管长度 (米)	产品编号
150	2,5	20824462
150	5	20824562
200	5	20824662
200	2,5	20824762

NFC-6.5尾气软管

	附件	产品编号
	橡皮套, 管夹 6"NTP, 2 件	20376476
	软管接头 150 (6")	20948810
	软管接头 200 (8")	20948910
	变径套管 200mm-150mm	20374284
	快接头, 管径150 (6"), 母	20948310
	快接头, 管径125 (5"), 公	20947910
	Bend 6".	20344593
	Hose clip with rubber sleeve, pair 200	20373838
	Hose suspension, hard plastic 150 mm	20373609
	连接器 6"-5". 钢材质	20344353
	链接管 d=160	20371413
	安全联轴器 100 (4 ")	20373797
	Hose suspension, hard plastic 125 mm	20373608
	Hose suspension, hard plastic 100 mm	20373607
	安全联轴器 150 (6")	20373798

NFC-6.5尾气软管

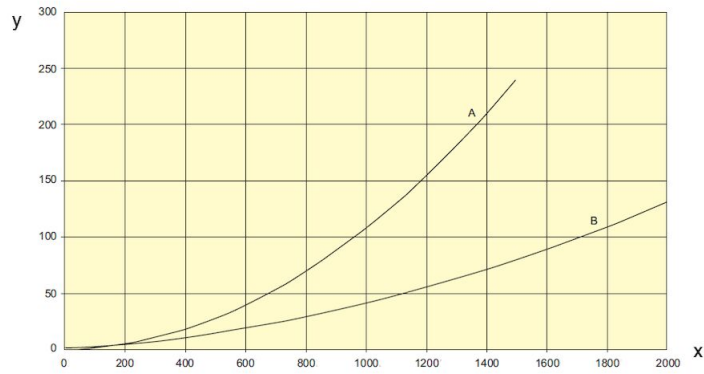

Y = Pressure drop Pa/m

X = Airflow m³/h

A= 150 mm (8") straight

B= 200 mm (8") straight