

## Bench Top Extraction Kits

Nederman Bench Top Extraction kits provide a quick and convenient solution for creating a fume-free workplace.






The Bench Top extraction kits includes arm(s) with hood or nozzle, fan with speed control and standard filter (particle, HEPA or gas), hose, connection details, and table bracket. The speed of the fan is variably controlled by a speed controller. Complete with hoses and extraction hoods. The hood is made of clear plastic, which increases the visibility.


<b>Product name</b>	Bench Top Extraction Kits
<b>Power Voltage (V)</b>	220 - 240
<b>Frequency (Hz)</b>	50 / 60
<b>Electric plug</b>	[without]
<b>Power (kW)</b>	0,12



## Bench Top Extraction Kits

[Image]	Description	Weight (kg)	[model]
	EK1000 kit includes 2 x FX32, Max airflow 42 m3/h	13	70509544
	EK1500 kit includes 3 x FX32, Max airflow 38 m3/h	15	70509644
	EK2000 kit includes 1 x FX50, Max airflow 100 m3/h	14	70509444

## Bench Top Extraction Kits

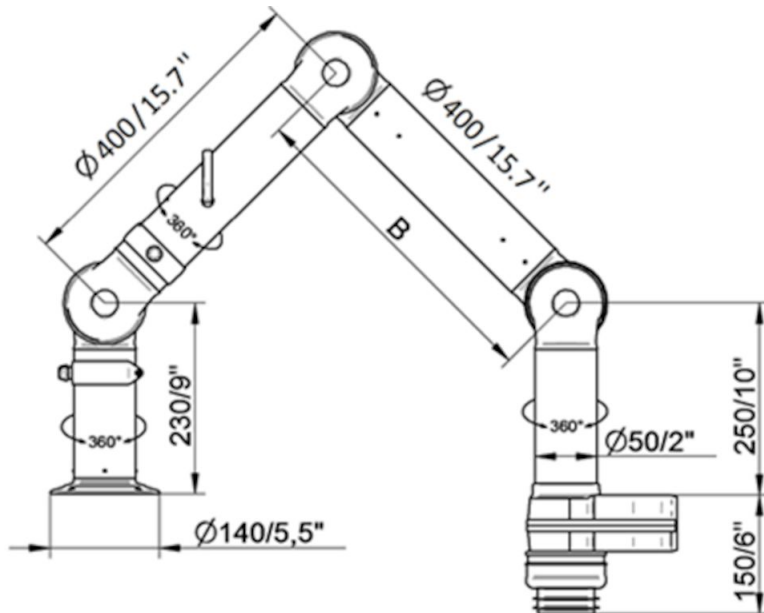

### EK 2000

Arm(s): 1 x FX2 50 arm

Hood(s): 1 x combination hood

Hose:  $\text{Ø} 50 \text{ mm}$  (2 inch), 3000 mm (118 inch) length

Max. airflow: 100 m<sup>3</sup>/h (58.8 cfm)

### EK 2500


Arm(s): 2 x FX2 50 arm

Hood(s): 2 x mini hood

Hose:  $\text{Ø} 50 \text{ mm}$  (2 inch), 3000 mm (118 inch) length

Max. airflow: 75 m<sup>3</sup>/h (44 cfm)

## Bench Top Extraction Kits

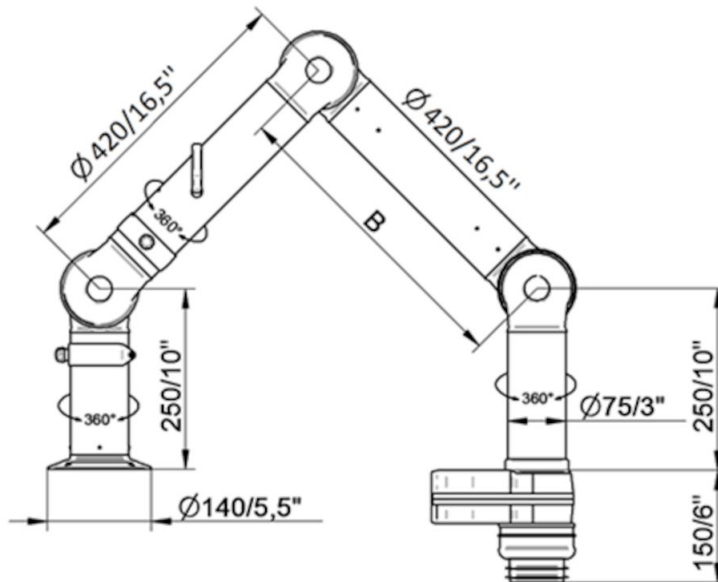

EK 3000


Arm(s): 1 x FX2 75 arm

Hood(s): 1 x mini hood

Hose:  $\varnothing$  75 mm (3 inch), 3000 mm (118 inch) length

Max. airflow: 150 m<sup>3</sup>/h (88.3 cfm)

## Bench Top Extraction Kits

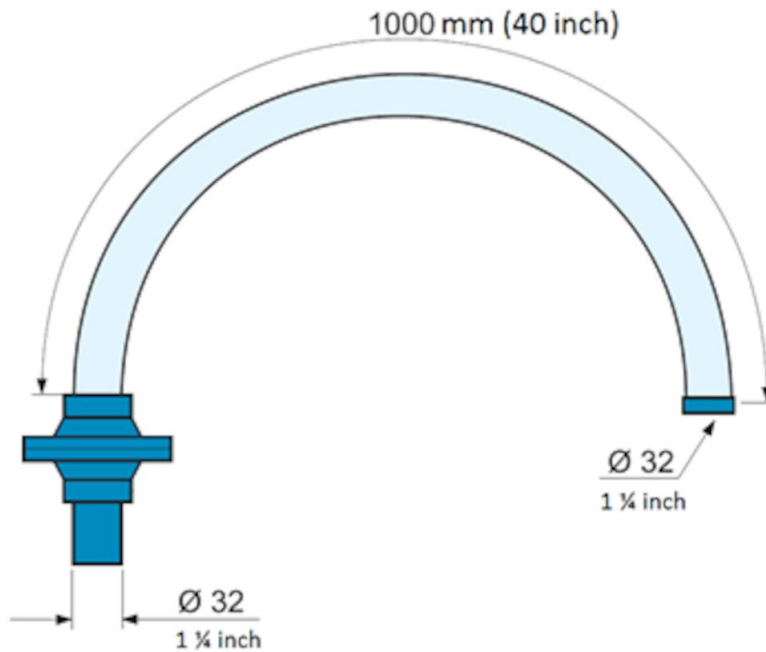

### EK 500

Arm(s): 1 x FX 32 arm

Hood(s): 1 x dome hood 1/2

Hose: Ø 45 mm (1 1/4 inch), 3000 mm (118 inch) length

Max. airflow: 45 m<sup>3</sup>/h (26.5 cfm)

### EK 1000

Arm(s): 2 x FX 32 arm

Hood(s): 2 x dome hood 1/2

Hose: Ø 45 mm (1 1/4 inch), 3000 mm (118 inch) length

Max. airflow: 42 m<sup>3</sup>/h (25 cfm)

### EK 1500

Arm(s): 3 x FX 32 arm

Hood(s): 3 x dome hood 1/2

Hose: Ø 45 mm (1 1/4 inch), 3000 mm (118 inch) length

Max. airflow: 38 m<sup>3</sup>/h (22.4 cfm)