


FM-вентилятор

Высокоэффективный вентилятор для серии FM-фильтров



Модельный ряд FM-вентиляторов разработан исключительно для непосредственного монтажа в камеру чистого воздуха FM-фильтра.

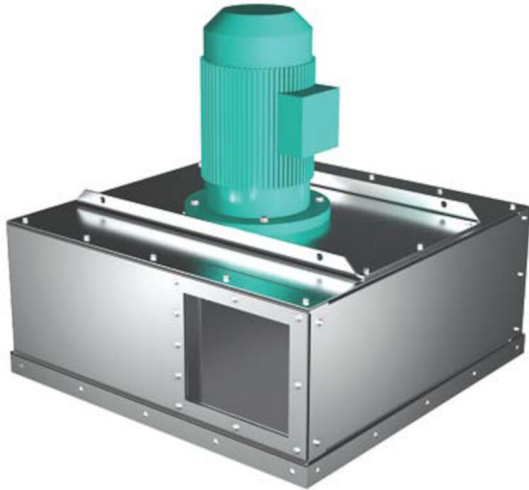








FM-вентиляторы разработаны с низким уровнем шума и защитой от перегрузки. Они обеспечивают надежную работу системы с минимальным потреблением энергии при сниженных нагрузках. Вентиляторы доступны только в версии RD.

| | |
|---------------------|-------------------------------------|
| Наименование товара | FM-вентилятор |
| Установка | Снаружи помещения, Внутри помещения |
| Материал | Гал. сталь, 2 мм (FM1000 = 4 мм) |
| Частота (Гц) | 50 |
| Количество фаз | 3 |

FM-вентилятор


| [image] | Название листа технических данных | Напряжение (В) | Noise level (dB(A)) | Вес (кг) | Мощность (кВт) | [model] |
|---------|--------------------------------------------------------------|----------------|---------------------|----------|----------------|---------|
| | Fan type FM620 (airflow optimum 2000 m3/h, Max 3000 m3/h) | 230/400 | 65 | 74 | 3 | 5501498 |
| | Fan type FM622 (airflow optimum 3000 m3/h, Max 4000 m3/h) | 400/690 | 69 | 83 | 4 | 5501537 |
| | Fan type FM622 (airflow optimum 3000 m3/h, Max 4000 m3/h) | 230/400 | 69 | 83 | 4 | 5501538 |
| | Fan type FM625 (airflow optimum 4000 m3/h, Max 5000 m3/h) | 230/400 | 67 | 95 | 5,5 | 5501576 |
| | Fan type FM625 (airflow optimum 4000 m3/h, Max 5000 m3/h) | 400/690 | 67 | 95 | 5,5 | 5501575 |
| | Fan type FM825 (airflow optimum 5000 m3/h, Max 6000 m3/h) | 400/690 | 72 | 150 | 7,5 | 5501612 |
| | Fan type FM831 (airflow optimum 7000 m3/h, Max 8000 m3/h) | 400/690 | 73 | 166 | 11 | 5501659 |
| | Fan type FM831 (airflow optimum 7000 m3/h, Max 8000 m3/h) | 230/400 | 73 | 166 | 11 | 5501660 |
| | Fan type FM835 (airflow optimum 9000 m3/h, Max 10000 m3/h) | 400/690 | 74 | 180 | 15 | 5501699 |
| | Fan type FM835 (airflow optimum 9000 m3/h, Max 10000 m3/h) | 230/400 | 74 | 180 | 15 | 5501700 |
| | Fan type FM1000 (airflow optimum 14000 m3/h, Max 16000 m3/h) | 400/690 | 76 | 260 | 18,5 | 5501741 |
| | Fan type FM1000 (airflow optimum 14000 m3/h, Max 16000 m3/h) | 230/400 | 76 | 260 | 18,5 | 5501742 |

FM-вентилятор

| | [accessory] | [partno] |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------|
|  | DUAL silencer for FM600 series fan with air grille | 5501813 |
|  | DUAL silencer for FM6800 series fan with air grille | 5501830 |
|  | DUAL silencer for FM1000 series fan with air grille | 5501854 |
|  | DUAL silencer for FM600 series fan with air grille and rain cover | 5501814 |
|  | DUAL silencer for FM6800 series fan with air grille and rain cover | 5501832 |
|  | DUAL silencer for FM1000 series fan with air grille and rain cover | 5501855 |
|  | DUAL silencer for FM600 series fan with flanged outlet for duct connection | 5501815 |
|  | DUAL silencer for FM6800 series fan with flanged outlet for duct connection | 5501833 |
|  | DUAL silencer for FM1000 series fan with flanged outlet for duct connection | 5501856 |
|  | Noise enclosure for FM800 fan | 5501783 |
|  | Noise enclosure for FM800 fan | 5501784 |
|  | Noise enclosure for FM1000 fan | 5501799 |

FM-вентилятор

FM fan curve. Static pressure at filter inlet / Airflow volume.
(Includes all internal resistance except filter media)

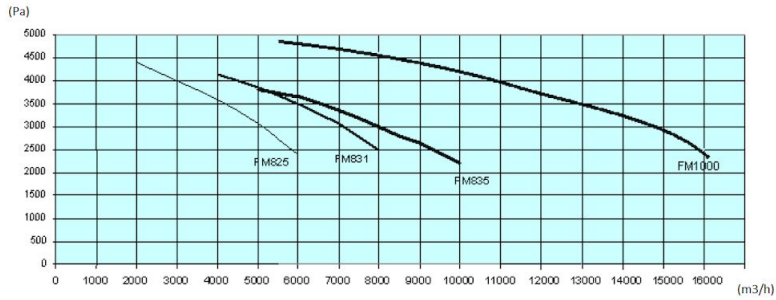

FM fan curve. Static pressure at filter inlet / Airflow volume.
(Includes all internal resistance except filter media)

