

## OSF 7000 HE

FibreDrain® oil smoke collector for continuous operation.



The Nederman OSF (Oil Smoke Filter) is designed to handle large amounts of oil smoke during continuous operation. They are engineered for high efficiency filtration coupled with lower maintenance costs.

The OSF 7000 HE has an external, top mounted, fan assembly and three-stage filtration, as standard. The first two stages consist of a filter cassettes with Nederman's FibreDrain® technology. The third stage is a class H13 HEPA filter with a 99.95% efficiency for MPPS, per EN1822. All tower-style OMF units are designed to accept an optional pre-filter. Nederman offers a wide selection of filters to fit a range of different applications.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two (2) Ø450mm inlet locations, one blanked using clamp ring connection.

Product name	OSF 7000 HE
Standard	2009/125/EC
Volume (for shipping) (ft <sup>3</sup> )	447.44
Noise level (dB(A))	70 dB(A) @5' from service side, with optional external silencer.
Protection class	IP55
Filter efficiency (%)	99,95
Installation	[Indoor]
Material	Sheet metal, painted inside and outside.
Filter cleaning method	[Draining]
Working pressure (psi)	14.0" (External)
Capacity (max airflow cfm)	4708
Operating Temperature	140° F, (limited by filter media).
Power Voltage (V)	460
Frequency (Hz)	60
No of phases	3
Number of filter elements	6
Amperage (A)	20.4
Weight (lbs)	2910
Power (Hp)	15 HP
Note	Plus two (2) optional filter element. *Requires special filter frame(s).















## OSF 7000 HE

[model]
12401254*

*\*Plus two (2) optional filter element. \*Requires special filter frame(s).*


## OSF 7000 HE

	[accessory]	[partno]
	Drain container with piping	12400764*
	Silencer 90° Ø 500 mm	12400038
	Transition NF 11 kW / Ø500 / 1005	12400989
	Optional FibreDrain Pre Filter ORF 890x770x96 mm	12400917
	Filter 1, OSF3500	12400032
	Filter 2, OSF3500	12400033
	HEPA Filter OSF3500	12400034
	Drain pump box, 60 Hz, 10 litre/min at 5m, excluding controller	12401329**
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 11kW	73008918
	Frequency inverter with 5kPa pressure sensor. 15kW	73008919

\*Drain connection must be elevated min 420mm from container support level

\*\*Controller available on request.

## OSF 7000 HE

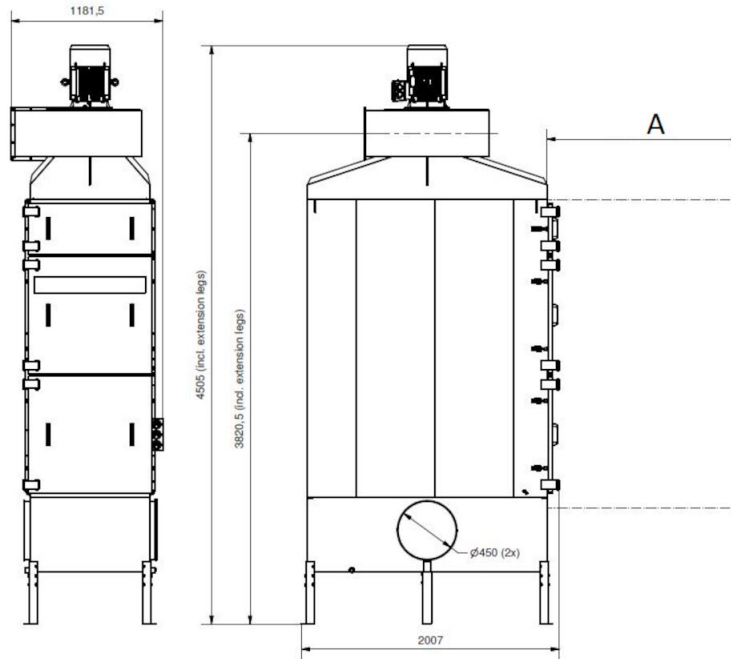

A) 1500 mm min filler service space