

Industrial vacuum cleaner 426 A



Industrial dry vacuum cleaner 426A is designed for removal and collection of industrial waste and spillage. This powerful dry vacuum suction unit comes equipped with a silo and cyclonic pre-separator before the filter, ensuring efficient collection of large quantities of material. The 426A Industrial vacuum can also be equipped with a HEPA filter for finer particles. The industrial vacuum cleaner includes slots for handling by forklift. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially easy. The dry vacuum's cyclonic silo is equipped with a manual valve





- Pre-separation in silo
- Manual filter cleaning prolongs the filter's lifetime
- Forklift handling

Product name	Industrial vacuum cleaner 426 A
Installation	[Outdoor], [Indoor]
Filter cleaning method	[ReverseAirPulse]
Application	[dust], [granulate], [grit], [swarf]
Dustbin volume (l)	58 l cyclonic silo + 47 l dust bin
Hose length (m)	7.5
Filter Area (m ²)	1,56
Filter type	[cartridge]
Number of filter elements	1
Filter material	Microfibre
Weight (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Note	Manual discharge valve



Granulate Grit Swarf Dust

Industrial vacuum cleaner 426 A






[Image]	Description	Type of hose ¹	Compressed air requirement	Max airflow (m ³ /h)	Noise level (dB(A))	Max vacuum (kPa)	[model]
	426A - NE42, Extended height. With floor cleaning equipment, scraping tool and conical nozzle	PVC	2,2 Nm ³ /min	360	73,5	-42	42142602*
	426A - NE52. With floor cleaning equipment, scraping tool and conical nozzle	PVC	3,0 Nm ³ /min	342	75,5	-52	42142600*
	426A - NE52. With floor cleaning equipment	PVC	3,0 Nm ³ /min	342	75,5	-52	42142606*
	426A - NE74. With floor cleaning equipment, scraping tool and conical nozzle	PE/C	5,3 Nm ³ /min	318	75,0	-78	42142601*

*Manual discharge valve


¹ See table below

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC		- 20 deg. C. to + 70 Deg. C.				
PEC		-40 Deg. C. - +60 Deg. C.				

Industrial vacuum cleaner 426 A

	[accessory]	[partno]
	Electrical control system for ejectors NE 22-76. (Suction time: 0-5 min, Discharge time: 0-15 sek)	43220001
	Timer electrical control for ejector NE 22-76, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43220026
	Timer electrical control for ejector NE 86-96, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43222008
	Plastic bag S50 - 25pcs 500 x 600 mm with hole for bin balancing	43650102
	Plastic bag S50 - 25pcs 630x800 mm with hole for bin balancing	43650103

Industrial vacuum cleaner 426 A

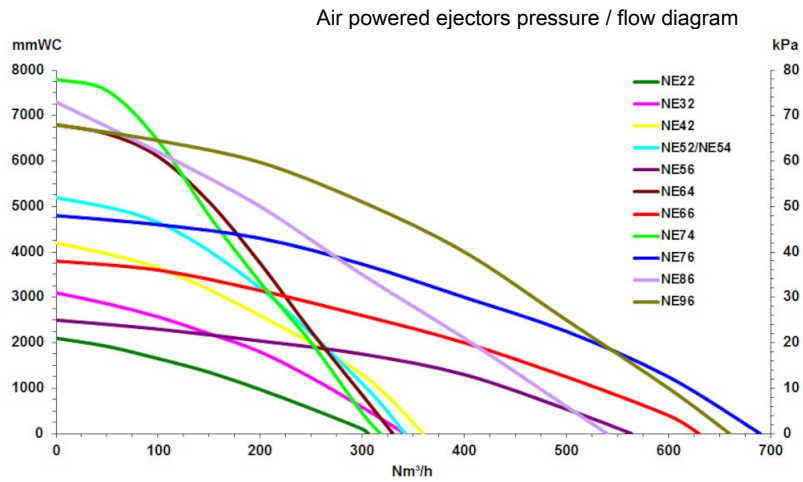

Air Powered ejectors

All performance data are based on 7 bar supply pressure