

## 426A







Industrial dry vacuum cleaner 426A is designed for removal and collection of industrial waste and spillage. This powerful dry vacuum suction unit comes equipped with a silo and cyclonic pre-separator before the filter, ensuring efficient collection of large quantities of material. The 426A Industrial vacuum can also be equipped with a HEPA filter for finer particles. The industrial vacuum cleaner includes slots for handling by forklift. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially easy. The dry vacuum's cyclonic silo is equipped with a manual valve

- Pre-separation in silo
- Manual filter cleaning prolongs the filter's lifetime
- Forklift handling

Product name	426A
Installation	นอกอาคาร, ในอาคาร
Filter cleaning method	[Manual], เป่าอากาศแบบไหลย้อน
Application	ฝุ่น, เมล็ด, กรวด, เศษ
Dustbin volume (l)	58 l cyclonic silo + 47 l dust bin
Hose length (m)	7,5
Filter Area (m2)	1,56
Filter type	ไส้กรองแบบตลับ
Number of filter elements	1
Filter material	Microfibre
Weight (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51



## 426A

รูปภาพ	Description	Type of hose <sup>1</sup>	Compressed air requirement	Max airflow (m <sup>3</sup> /h)	Noise level ((dB)A)	Max vaccum (kPa)	รุ่น
	426A - NE42, Extended height. With floor cleaning equipment, scraping tool and conical nozzle	PVC	2,2 Nm <sup>3</sup> /min	360	73,5	-42	42142602*
	426A - NE52, With floor cleaning equipment, scraping tool and conical nozzle	PVC	3,0 Nm <sup>3</sup> /min	342	75,5	-52	42142600*
	426A - NE52, With floor cleaning equipment	PVC	3,0 Nm <sup>3</sup> /min	342	75,5	-52	42142606*
	426A - NE74, With floor cleaning equipment, scraping tool and conical nozzle	PE/C	5,3 Nm <sup>3</sup> /min	318	75,0	-78	42142601*


\*Manual discharge valve

<sup>1</sup> See table below

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	สูญญากาศแม็กซ์ 84 กิโลปาสคาล ภายในรีลมีดัด 60mm เสริมด้วยเหล็กเกลียวฝังตัว	- 20 deg. C. to + 70 Deg. C.				
PEC	สำหรับการใช้งานทำความสะอาด แม็กซ์ 50 กิโลปาสคาลสูญญากาศ การนำ <10 ^ 6 โอน์ม  ขอแนะนำให้แก้ไข	-40 Deg. C. - +60 Deg. C.				

## 426A

Air powered ejectors pressure / flow diagram

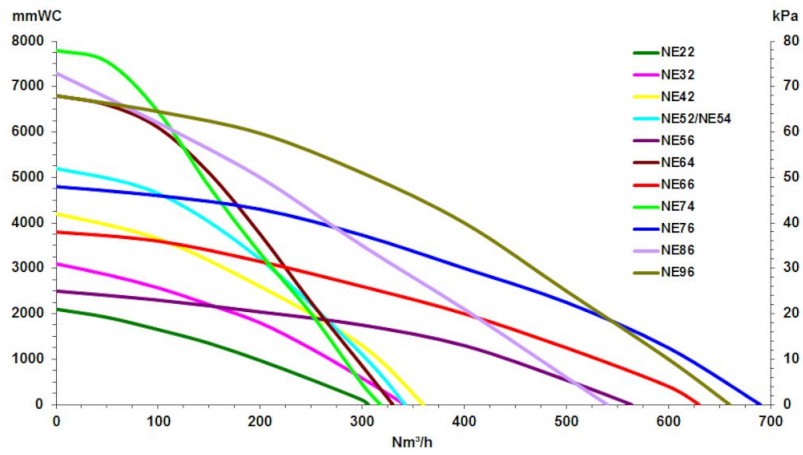

Air Powered ejectors

All performance data are based on 7 bar supply pressure