

426A

Vacuum for extraction of dry waste and powders







工业用干式真空吸尘器426A专为清除和收集工业废料和溢物而设计。这款强大的干式真空抽吸装置配有筒仓和旋风预分离器，过滤之前确保有效收集大量的废料。426A工业用真空吸尘器亦可配备有高效空气过滤器HEPA，以过滤细小颗粒。工业用真空吸尘器包括插槽，用于叉车装卸。特制转动、锁轮尺寸经专业设计，更加易于移动，尤其易于大量装卸。干式真空吸尘器的气旋筒仓配有手动阀

在筒仓中预分离
手动清洁过滤芯可延长过滤器使用寿命
叉车装卸

品名	426A
安装	室外, 室内
清灰方式	反吹风清灰
应用	粉尘, 颗粒物, 沙砾, 切屑
灰斗容量	58 l cyclonic silo + 47 l dust bin
胶管长度 (米)	7.5
过滤面积 (平方米)	1,56
除尘器类型	滤筒式过滤器
滤芯数量	1
滤芯	Microfibre
重量 (公斤)	119
Hose length (m)	7,5
Hose diameter (mm)	51
技术数据声明	Manual discharge valve



426A




[image]	产品名称	软管类型	Compressed air requirement	Max airflow (m/h)	Noise level (dB(A))	Max vacuum (kPa)	产品编号
	426A – NE42, Extended height. With floor cleaning equipment, scraping tool and conical nozzle	PVC	2,2 Nm ³ /min	360	73,5	-42	42142602*
	426A – NE52, With floor cleaning equipment, scraping tool and conical nozzle	PVC	3,0 Nm ³ /min	342	75,5	-52	42142600*
	426A – NE52, With floor cleaning equipment	PVC	3,0 Nm ³ /min	342	75,5	-52	42142606*
	426A – NE74, With floor cleaning equipment, scraping tool and conical nozzle	PE/C	5,3 Nm ³ /min	318	75,0	-78	42142601*

*Manual discharge valve


See table below

软管类型	描述	温度范围, 摄氏度	管尾接头, 输送软管	管尾接头, 进气软管	盘管器, 输送软管	盘管器, 进气软管
PVC	最大真空度84 kPa, 内弯曲半径60毫米, 钢筋嵌入钢螺旋	- 20 deg. C. to + 70 Deg. C.				
PEC	清洗应用, 最大真空50 kPa, 电导率 < 10 ⁻⁶ 欧姆	-40 Deg. C. - +60 Deg. C.				

426A

附件		产品编号
	Control S for NE 22-76	43220001
	Control S for NE 22-76	43220026
	Control S for NE86-96	43222008
	Plastic bag S50 – 25pcs 500 x 600 mm with hole for bin balancing	43650102
	Plastic bag S50 – 25pcs 630x800 mm with hole for bin balancing	43650103

426A

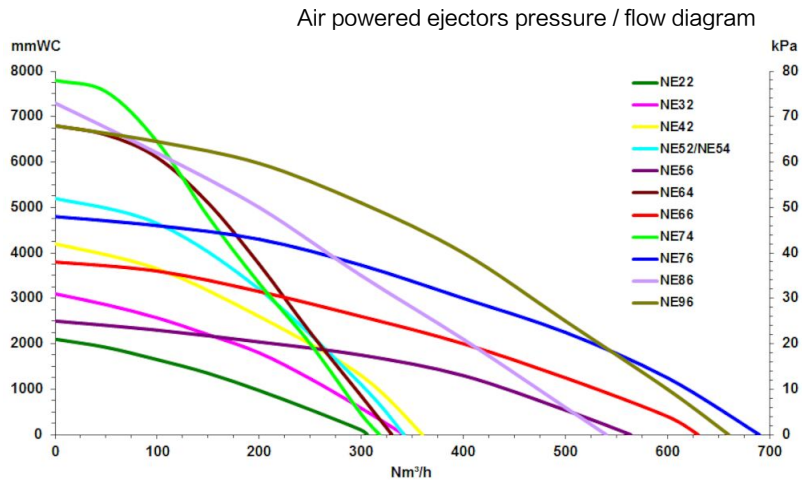

Air Powered ejectors

All performance data are based on 7 bar supply pressure