

Industrial vacuum cleaner 426A EX

Vacuum for extraction of waste and powders



Industrial dry vacuum cleaner 426EX is designed for removal and collection of industrial waste and spillage. This powerful dry vacuum suction unit comes equipped with a silo and cyclonic pre-separator before the filter, ensuring efficient collection of large quantities of material. The 426EX Industrial vacuum is equipped with a HEPA filter for finer particles. The industrial vacuum cleaner includes slots for handling by forklift. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially easy. The dry vacuum's cyclonic silo is equipped with a manual valve ATEX approved equipment: EX II 2 GD c IIB 60°C (T6).

- ATEX approved
- Pre-separation in silo
- Manual filter cleaning prolongs the filter's lifetime
- Forklift handling

Product name	Industrial vacuum cleaner 426A EX
Installation	[Indoor]
Filter cleaning method	Reverse air pulse
Application	[dust], [liquid], [granulate], [swarf]
Dustbin volume (l)	58 l cyclonic silo + 47 l dust bin
Hose length (m)	7,5
Filter Area (m ²)	1,56
Filter type	[cartridge]
Number of filter elements	1
Filter material	Microfibre
Type of hose	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vacuum (kPa)	-52
Weight (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Note	With cleaning set, brush and conical nozzle




Granulate

Swarf

Dust

Liquid


Industrial vacuum cleaner 426A EX

Image	Description	Model
	426A EX - NE52, S50, with manual discharge valve	42242609*

*With cleaning set, brush and conical nozzle

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	Max vacuum 84 kPA Inner bending radius 60 mm Reinforced with inbedded steel helix	- 20 deg. C. to + 70 Deg. C.				

Industrial vacuum cleaner 426A EX

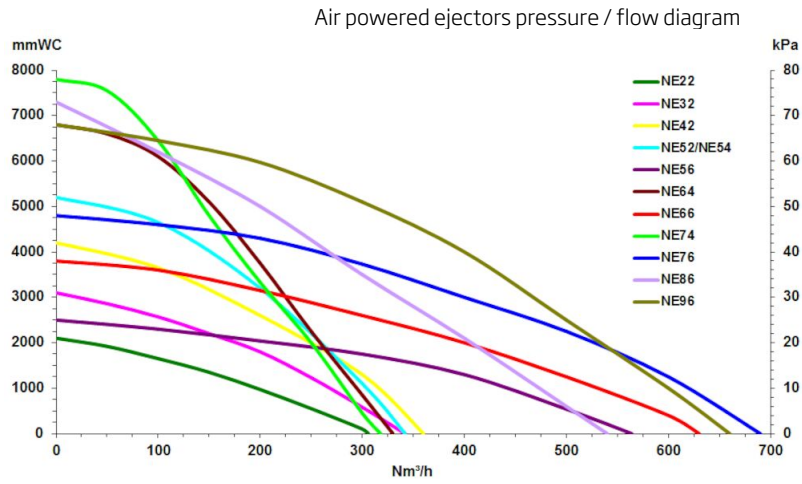

Air Powered ejectors

All performance data are based on 7 bar supply pressure