

722A

Powerful dust collector with pre separator



An extremely powerful vacuum unit for the collection of blasting grit and other granulated material. The combination of high vacuum and high airflow make material transport over long distance possible. Compact design, built on a frame with the possibility of transportation by forklift. Equipped with grit and dust separator. The clean grit is collected in a silo and can be re-used. The dust is trapped in a high efficient NCF filter and discharged into a dustbin or bag.


- High vacuum and airflow
- Dust separation from grit and granulates
- Efficient self-cleaning NCF filter

Product name	722A
Installation	[Outdoor], [Indoor]
Filter cleaning method	Reverse air pulse
Application	[granulate], [grit], [swarf]
Dustbin volume (l)	67+220
Filter Area (m ²)	5,25
Filter type	[NCF]
Number of filter elements	70
Filter material	Vyon 5,25
Type of hose	PU12
Compressed air requirement	8,6 Nm ³ /min
Max airflow (m ³ /h)	660
Noise level (dB(A))	78.0
Max vacuum (kPa)	-68
Weight (kg)	300
Hose length (m)	10
Hose diameter (mm)	76
Note	With gulper head



Granulate Grit Swarf




722A

Image	Description	Model
	722A - NE96, S200 with manual discharge valve	42172200*


*With gulper head

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PU12	Suitable for abrasive material Transparent polyurethane Reinforced with inbedded steel helix	- 40 deg. C. - + 90 Deg. C.				

722A

	Accessory	Part No
	Control S for NE 22-76	43220001
	Control S for NE 22-76	43220026
	Control S for NE86-96	43222008

722A

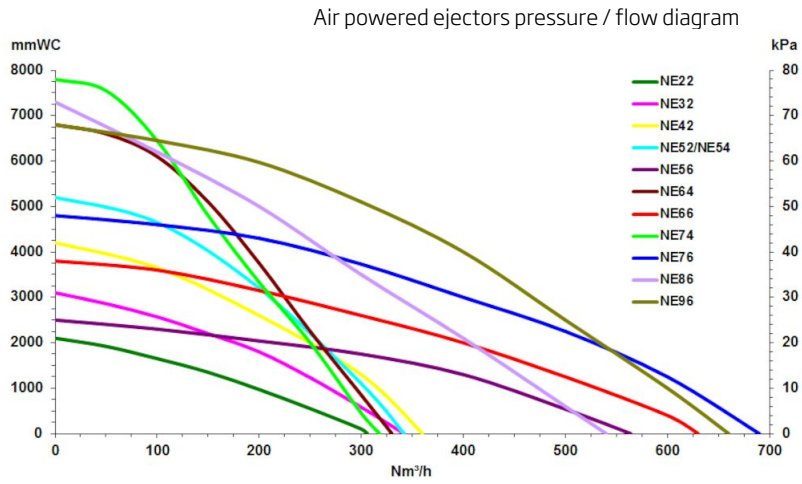

Air Powered ejectors

All performance data are based on 7 bar supply pressure