

## 非接触式抽排系统

用于带有多类型排气管汽车的固定系统



方便操作所有类型汽车的系统。包括配有非接触式抽排装置的基本的滑轨系统。抽排效率非常高。一个抽排装置可满足数个工位的作业要求。因使用了轻质材料和滚珠轮子，抽排装置易于移动。设计旨在降低损坏汽车的风险。两个装置用双排气管为汽车提供作业。

- 非接触——无刮擦
- 通用——可用于所有类型的排气管
- 通用——地面或被提升的汽车
- 符合人体工程学——易于操作和在工作站之间移动
- 实用——不使用时即移开


















品名	非接触式抽排系统
材料	<p>Touchless extraction unit:                      Exhaust hood: EPDM                      Arm 100mm (4" ): Aluminium                      Joints: Poly Amid                      Telescopic section: Aluminium                      Trolley:                      Glass-fibre composite                      8 running wheels                      4 guide wheels (all with sealed ball bearings)                      Resistant to all chemicals in diesel and petrol exhaust</p> <p>Rail 920:                      Rail profile: Aluminium, extruded, hardened, noncorrosive                      Sealing lips: EPDM rubber, profiled, with inner low-friction layer, delivered in coils according to track length                      End cover: Glass-fibre composite. Lid of galvanized sheet metal                      Brackets: Sheet metal, galvanized                      With 100 mm (4" ) threaded rods for alignment</p>
物料回收 (%)	100
工作温度	Temperature resistance: Continuous 150 C (302° F) Intermittent 180 C (356° F)
Further technical data	Crosssection area: 230 cm (36 in)
重量 (公斤)	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)



## 非接触式抽排系统


产品名称	产品编号
伸缩式抽排系统，带小车	20808064
伸缩式抽排系统，无小车	20808164

## 非接触式抽排系统

附件		产品编号
	尾气抽排导轨 920 L= 5.0 m (17)	20916120*
	尾气抽排导轨 920 L= 2.5 m (8)	20916020*
	尾气抽排导轨 920 L= 7.5 m (25)	20916220*
	尾气抽排导轨 920 L= 10.0 m (33)	20916320*
	尾气抽排导轨 920 L= 12.5 m (41)	20916420*
	尾气抽排导轨 920 L= 15.0 m (50)	20916520*
	尾气抽排导轨 920 L= 17.5 m (57)	20916620*
	尾气抽排导轨 920 L= 20.0 m (66)	20916720*
	尾气抽排导轨 920 L= 22.5 m (74)	20916820*
	尾气抽排导轨 920 L= 25.0 m (82)	20916920*
	尾气抽排导轨 920 L= 27.5 m (90)	20917020*
	尾气抽排导轨 920 L= 30.0 m (99)	20917120*
	尾气抽排导轨 920 L= 32.5 m (106)	20918220*
	尾气抽排导轨 920 L= 35.0 m (115)	20917220*
	尾气抽排导轨 920 L= 40.0 m (132)	20917320*
	尾气抽排导轨 920 L= 45.0 m (148)	20917420*
	尾气抽排导轨 920 L= 50.0 m (165)	20917520*
	顶部出风口 200用于 920	20374246

\*套件含悬挂零件、连接接头、橡胶密封、端盖与端止停器。

## 非接触式抽排系统

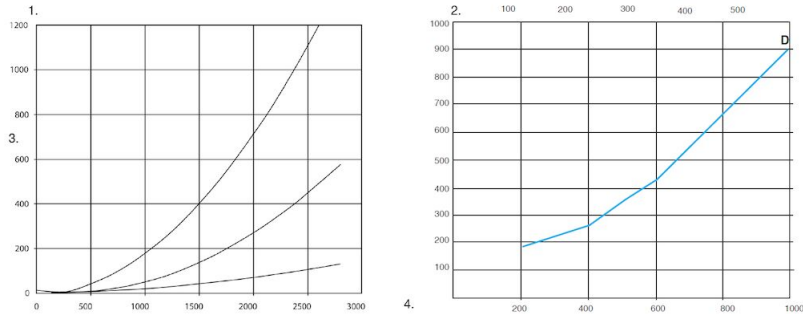


1: Rail 920 pressure drop, 2: Pressure drop Telescope including trolley, 3: Pressure drop Pa, 4: Airflow m3/h

A= Top connection, 200 mm, B= Side connection, 160 mm, C= Rail 920, per metre, D= Touchless extraction unit including trolley

Pressure drop approximately 55% less than corresponding system with hose.

Airflow recommendations Car: 600 m/h (350 cfm)

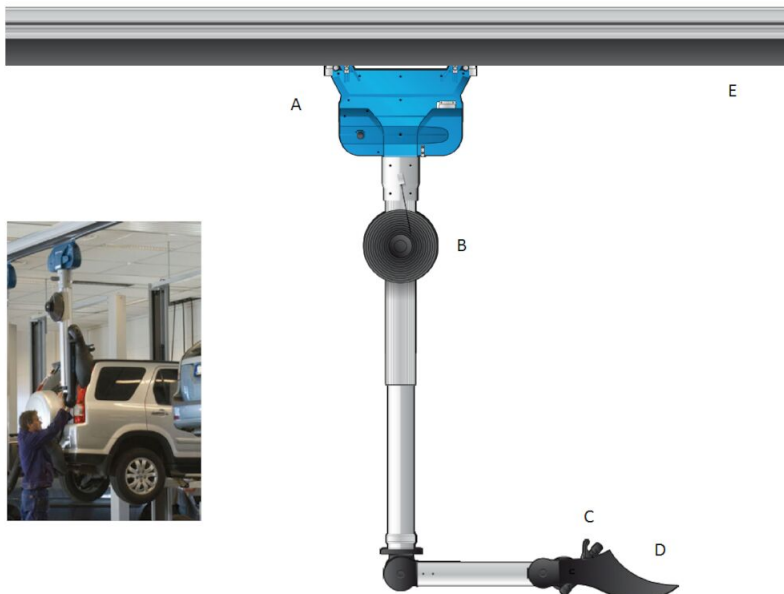

### System parts

A = Automatic damper integrated in trolley 1500, closes when unit is in parking position



B = Balancer, Makes the Telescopic tube weightless when adjusting length of the Telescope

C = Joint release button For easy and secure positioning

D = Exhaust hood

E = Rail 920

## 非接触式抽排系统

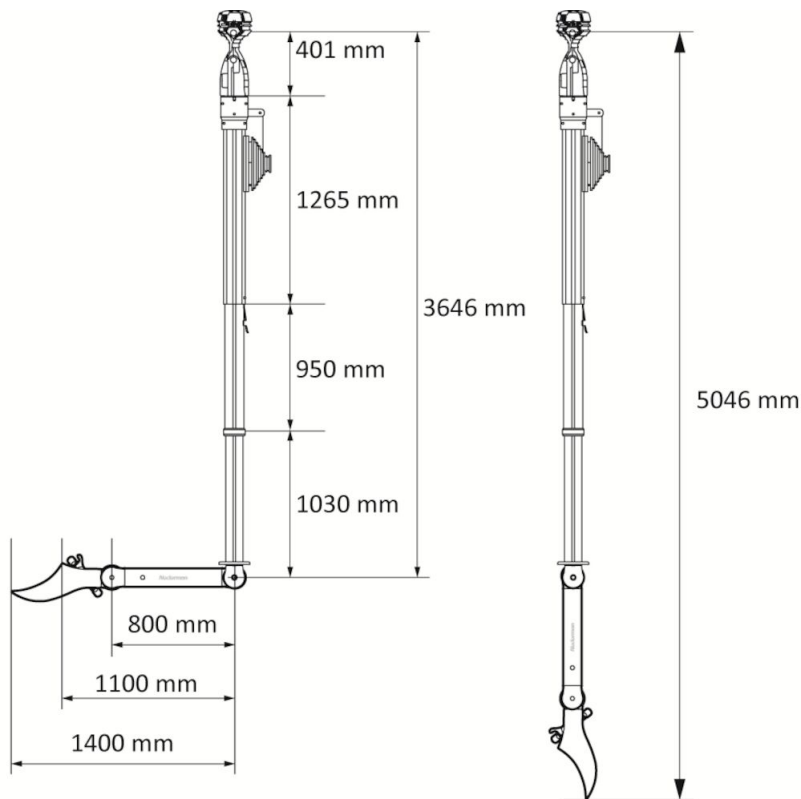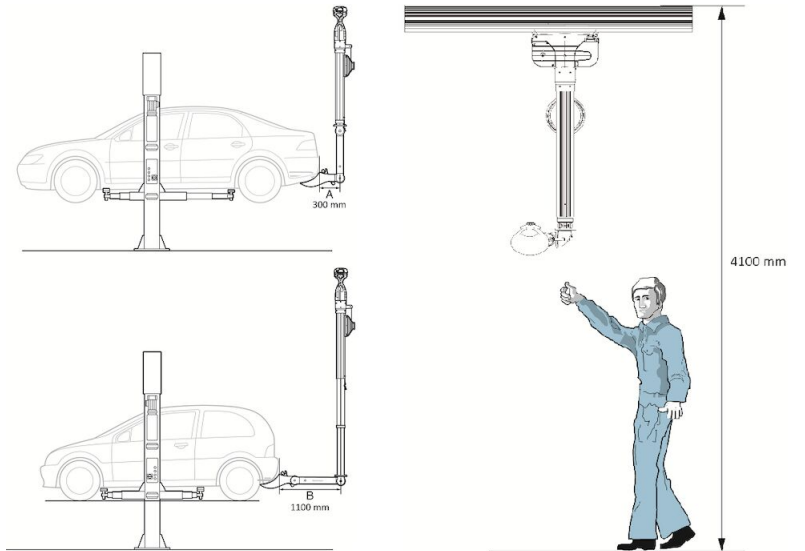

A = 300mm (The distance from the center of the rail to the back end of the longest car to be used)  
 B = 1100mm (The distance from the center of the rail to the back end of the shortest car to be used)