


高真空阀TAV 50

使用自动阀门将高真空系统效率最大化。

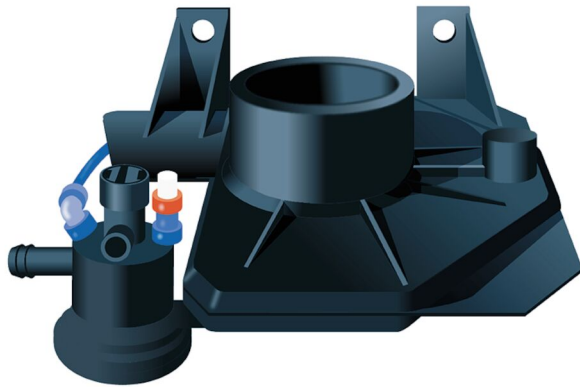

TAV 50自动阀可使高真空系统的效率最大化。由于阀门可以自动开启和关闭，真空始终集中于连接处、抽排点或正在运行中的机器。这样可以将抽排力最大化，降低运营成本，减少真空装置的大小。

ATEX版本说明

根据变化和应用领域，许多TAV50装置按ATEX指令标记有EX符号和设备类别。根据94/9/EC指令，所有带EX符号的TAV 50变体为3D类设备根据指令2014/34/EC。这意味着根据1999/92/EC指令可将这些变体置于22区。手动控制的TAV 50 MA适合安装在分类区域内(22区)，即使未标有EX符号。手控设备不在指令

94/9/EC(ATEX)之列，所以此阀不做此标记。其他无EX符号的阀(W、G和AC/DC阀)不适合ATEX，所以不应安装于分类区域内。见下列零件编号表，EX包含于零件名字，以便确认哪些适合分类区域。EX符号。

运营成本更低、真空设备更小
建筑物内噪音水平低
导电塑料材料

品名	高真空阀TAV 50
安装	室内
材料	导电塑料
最大负压 (千帕)	50
作业温度	0° to +40° C (32 F to 104 F)
直径 (mm)	51
Length (m)	51



高真空阀TAV 50

[image]	产品名称	产品编号
	TAV 50 MV-W, 通过带感应环的焊炬控制	40060110
	TAV 50 MV-G, 通过电气设备控制	40060120
	TAV 50 FV/MV-W, 通过气动设备和/或带感应环的焊炬控制	40060140
	TAV 50 MA, 手动阀门	40147020
	TAV 50 PC EX, 压缩空气控制 EX	40147030*
	TAV 50 FV EX, 通过气动设备控制	40060100
	TAV 50 FV/MV 24V DC Ex, 压缩空气控制或 24 VDC 控制	40147040**
	TAV 50 MV 24V AC/DC, 24 VDC 控制	40147050
	TAV 50 MV 230V AC EX, 230 VAC 控制 EX	40147060
	TAV 50 MV 24V DC EX, 24 VDC 控制 EX	40147071
	TAV 50 FV/MV 24V AC/DC, 24 VDC 通过电气和/或气动设备控制	40147090*
	TAV 50 FV/MV 230V AC EX, 230 VAC 通过电气和/或气动设备控制	40147100*
	TAV 50 MV 115V AC EX, , 115 VAC 控制 EX	40147110
	TAV 50 FV/MV 115V AC EX, 230 VAC 通过电气和/或气动设备控制 EX	40147120***

*压缩空气的最小/最大气压为: 0.5/1.0 MPa。建议 0.6 – 0.7 Mpa

**压缩空气的最小/最大气压为: 0.5/1.0 MPa。建议 0.6 – 0.7 Mpa

***压缩空气的最小/最大气压为: 0.5/1.0 MPa。建议 0.6 – 0.7 Mpa

高真空阀TAV 50

附件		产品编号
	3-Port valve. 3/2-port pneumatic control valve (rocker) for control of single-action cylinder. Suitable for TAV 50 PC. Set includes couplings and hose (6/4 mm, 25 m).	40680280
	Pneumatic activator for TAV 50 FV and TAV 50 FV/MV valves. Activates the valve and enables applications other than extraction from pneumatic or electric tools, such as floor cleaning.	40190010
	Choke valve for delayed closure of TAV 50 FV and TAV 50 FV/MV valves. Max. delay: 10 seconds, G1/8" thread.	40617910
	Choke valve for delayed closure of TAV 50 MV valves. Max. delay: 3 seconds, M5 thread.	40617520
	TAV 50 阀套件	40375151
	斜三通管防拉伸头	40720010
	Junction box	40720830
	Wire Connector 2,5 mm2, 1-pole.	40730170
	Hose (25m), PVC, for compressed air	40650021
	远程信号线, 2x0.75mm2, PVC, 长100m	40730403
	信号线,3股0.75平方, PVC, 100m长	40730404
	流量感应阀P, 小流量	40146252
	Pneu. activator kit for TAV50	40377160