

## 112A

### Removal of grease and high viscosity material

---




A high capacity vacuum unit for suction and transportation of grease and other high viscosity material. The material is collected in a plastic bag for easier discharge. Suction equipment is made for heavy duty work. The container is mounted to the trolley by brackets.

- Comes with NE 74 powerhead
- Wet cleaning
- Vacuuming capacity
- Easy handling

Nom du produit	112A
Type de filtre	Filtre à manche
Nombre d'éléments filtrants	1
Média filtrant	Polyester-teflon
Type de tuyau	PU12
Compressed air requirement	5,3 Nm <sup>3</sup> /min
Max airflow (m <sup>3</sup> /h)	318
Volume sonore (dB(A))	75.0
Max vacuum (kPa)	-78
Hose length (m)	5
Hose diameter (mm)	38
Note	Avec brosse et buse conique




## 112A

[image]	Nom de la fiche technique	[model]
	112A - NE74, S50 unité à graisse	42111203*

\*Avec brosse et buse conique

Type de tuyau	Caractéristiques du tuyau	Température	Hose fittings in free hose end, distribution hose	Raccords en bout de tuyau de connexion	Type de connexion sur l'enrouleur, tuyau de distribution	Hose connection on reel, inlet hose
PU12	Convient pour un matériau abrasif. Polyuréthane transparent. Renforcé avec spirale en acier.	- 40 deg. C. - + 90 Deg. C.				

## 112A

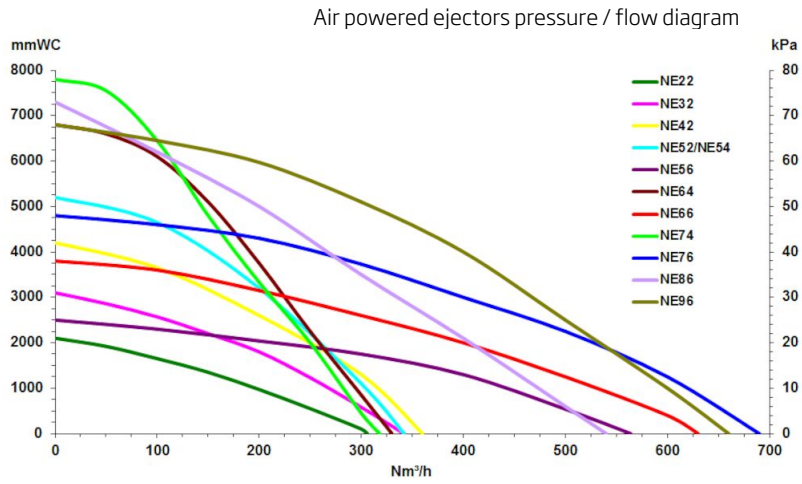

Air Powered ejectors

All performance data are based on 7 bar supply pressure