

Industrial vacuum cleaner 116A



A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

- Comes with NE 52 powerhead
- Wet & Dry cleaning
- Vacuuming capacity
- Easy handling
- Tippable trolley; Bottom discharge optional

Product name	Industrial vacuum cleaner 116A
Filter type	[bag]
Number of filter elements	1
Type of hose	[PVC]
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vacuum (kPa)	-52
Weight (kg)	51
Hose length (m)	7,5
Hose diameter (mm)	51
Note	With cleaning set, brush, conical and toothed nozzle






Industrial vacuum cleaner 116A

Description	[model]
116A - NE52, S50.	42111600*
116A - NE52, S50, container w/ballvalve R2	42111607*


**With cleaning set, brush, conical and toothed nozzle*

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC		- 20 deg. C. to + 70 Deg. C.				

Industrial vacuum cleaner 116A

	[accessory]	[partno]
	Electrical control system for ejectors NE 22-76. (Suction time: 0-5 min, Discharge time: 0-15 sek)	43220001
	Timer electrical control for ejector NE 22-76, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43220026
	Timer electrical control for ejector NE 86-96, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43222008

Industrial vacuum cleaner 116A

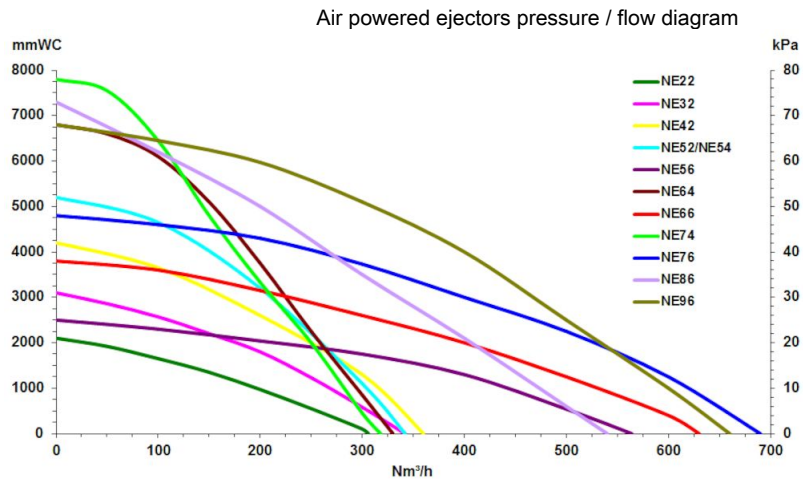

Air Powered ejectors

All performance data are based on 7 bar supply pressure