

## Industrial vacuum cleaner 405A

Powerful air driven vacuum with dual container.

---




Dual container system, designed for removal of industrial waste. This powerful industrial vacuum cleaner comes equipped with a silo and filter container for the removal of industrial waste materials. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads simple. The silo is designed to allow the collected material to be discharged over gratings or chutes for the central collection of materials. The unit can be equipped with an adjustable counterweight valve and holder for discharge into bags. The model include slots for handling by forklift.

- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground

|                                 |                                |
|---------------------------------|--------------------------------|
| Product name                    | Industrial vacuum cleaner 405A |
| Compressed air requirement      | 3,0 Nm <sup>3</sup> /min       |
| Max airflow (m <sup>3</sup> /h) | 342                            |
| Noise level (dB(A))             | 75,5                           |
| Max vacuum (kPa)                | -52                            |
| Weight (kg)                     | 119                            |
| Hose diameter (mm)              | 51                             |






## Industrial vacuum cleaner 405A

| [Image]   | Description                              | Type of hose <sup>1</sup> | Hose length (m) | [model]  |
|---|--|---------------------------|-----------------|----------|
|  | 405A -NE52 with floor cleaning equipment |                           | 7,5             | 42140500 |
|   | 405A -NE52 with abrasive plate           |                           | 2               | 42140521 |


<sup>1</sup> See table below

| Hose type | Specification | Temperature range, °C        | Hose fittings in free hose end, distribution hose | Hose fitting on free hose end, inlet hose | Hose connection on reel, distribution hose | Hose connection on reel, inlet hose |
|-----------|---------------|------------------------------|---|---|--|-------------------------------------|
| PVC       |               | - 20 deg. C. to + 70 Deg. C. |   |   |  |                                     |
| PU12      |               | - 40 deg. C. -+ 90 Deg. C.   |   |   |  |                                     |

## Industrial vacuum cleaner 405A

|   | [accessory]  | [partno] |
|---|--|----------|
|  | Electrical control system for ejectors NE 22-76.<br>(Suction time: 0-5 min, Discharge time: 0-15 sek)  | 43220001 |
|  | Timer electrical control for ejector NE 22-76, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek) | 43220026 |
|  | Timer electrical control for ejector NE 86-96, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek) | 43222008 |

## Industrial vacuum cleaner 405A

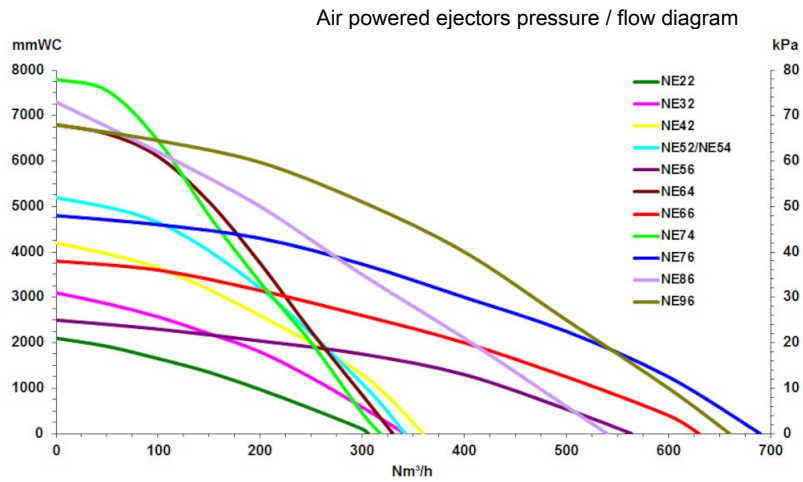

Air Powered ejectors

All performance data are based on 7 bar supply pressure