

405A

Powerful air driven vacuum with dual container.




Dual container system, designed for removal of industrial waste. This powerful industrial vacuum cleaner comes equipped with a silo and filter container for the removal of industrial waste materials. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads simple. The silo is designed to allow the collected material to be discharged over gratings or chutes for the central collection of materials. The unit can be equipped with an adjustable counterweight valve and holder for discharge into bags. The model include slots for handling by forklift.

- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground

Product name	405A
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level ((dB)A)	75,5
Max vaccum (kPa)	-52
Weight (kg)	119
Hose diameter (mm)	51



405A


รูปภาพ	Description	Type of hose ¹	Hose length (m)	รุ่น
	405A -NE52 with floor cleaning equipment	PVC	7,5	42140500
	405A -NE52 with abrasive plate	PU12	2	42140521

¹ See table below

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	สูญญากาศแม่เหล็ก 84 กิโลปาสคาล ภายในเรื่อมีตัด 60mm เสริมด้วยเหล็กเกลียวฝังตัว	- 20 deg. C. to + 70 Deg. C.				
PU12	เหมาะสำหรับวัสดุที่มีฤทธิ์กัดกร่อน ยูรีเทนใส่ เสริมด้วยเหล็กเกลียวฝังตัว	- 40 deg. C. -+ 90 Deg. C.				

405A

Air powered ejectors pressure / flow diagram

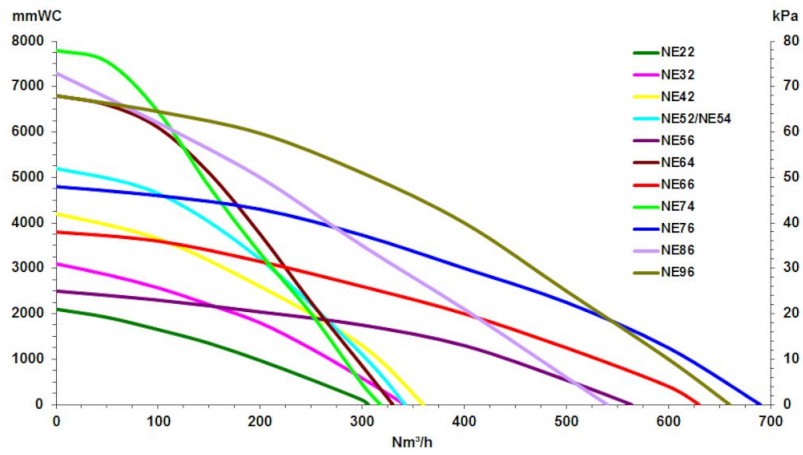

Air Powered ejectors

All performance data are based on 7 bar supply pressure