

Industristøvsuger 425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Produkt navn	Industristøvsuger 425A
Type af filter	Filterpatron
Antal filter	1
Slangetype	PVC
Trykluftbehov	3,0 Nm ³ /min
Maks. luftmængde (m ³ /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Vægt (kg)	119
Slangelængde (m)	7,5
Hose diameter (mm)	51
Afklaring af tekniske data	






Industristøvsuger 425A


Beskrivelse	Model
425A - NE52	42142500

Slangetype	Specifikation	Temperaturområde, °C	Slangekobling, fri ende distributionslange	Slangekobling, fri ende tilslutningsslange	Slangtilslutning, distributionslange	Slangekobling, tilslutningsslange
PVC	Max vakuum 84 kPa. Indre bøjningsradius 60 mm. Forstærket med indlagt stål helix	- 20 deg. C. to + 70 Deg. C.				

Industristøvsuger 425A

Tilbehør		Artikelnummer
	Control S for NE86-96	43222008
	Control S for NE 22-76	43220026
	Control S for NE 22-76	43220001

Industristøvsuger 425A

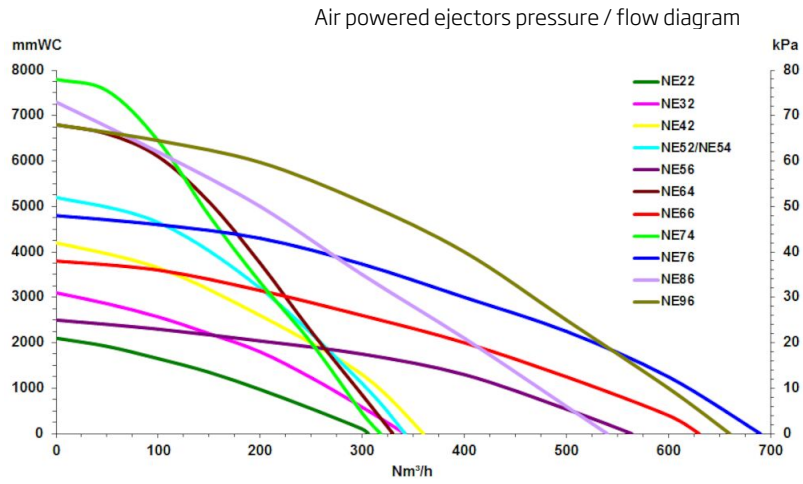

Air Powered ejectors

All performance data are based on 7 bar supply pressure