

425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Nom du produit	425A
Type de filtre	Filtre à cartouche
Nombre d'éléments filtrants	1
Type de tuyau	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Volume sonore (dB(A))	75,5
Max vaccum (kPa)	-52
Poids (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Note	






425A


Nom de la fiche technique	[model]
425A - NE52	42142500

Type de tuyau	Caractéristiques du tuyau	Température	Hose fittings in free hose end, distribution hose	Raccords en bout de tuyau de connexion	Type de connexion sur l'enrouleur, tuyau de distribution	Hose connection on reel, inlet hose
PVC	Vide max. 84 kPa. Rayon de courbure intérieur 60 mm. Renforcé avec spirale en acier.	- 20 deg. C. to + 70 Deg. C.				

425A

	[accessory]	[partno]
	Commande Sfor NE 86	43222008
	Commande S for NE 22-76	43220026
	Commande S pour NE 22-76	43220001

425A

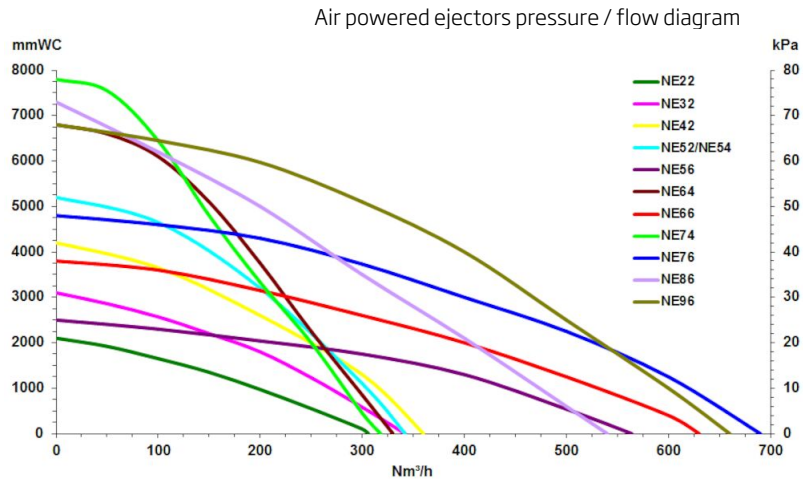

Air Powered ejectors

All performance data are based on 7 bar supply pressure