

425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Nome do Produto	425A
Tipo de filtro	Filtro de cassete
Número de elementos filtrantes	1
Tipo de mangueira	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vacuum (kPa)	-52
Peso (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Nota	




425A

Descrição	[model]
425A - NE52	42142500

Tipo de mangueira	Especificações	Gama de temperatura, °C	Acopladores na extremidade livre, mangueira de distribuição	Acopladores na extremidade livre, mangueira de entrada	Ligação da mangueira no enrolador, mangueira de distribuição	Ligação da mangueira no enrolador, mangueira de entrada
PVC		- 20 deg. C. to + 70 Deg. C.				

425A

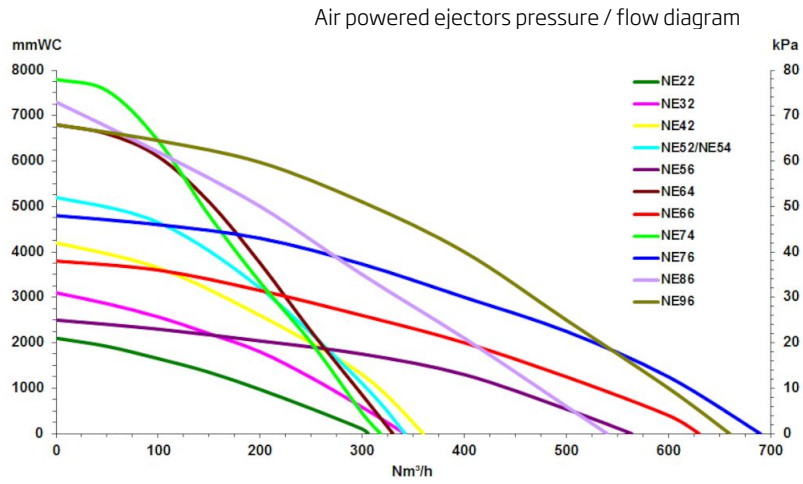

Air Powered ejectors

All performance data are based on 7 bar supply pressure