

เครื่องดูดแบบเคลื่อนย้าย 425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Product name	เครื่องดูดแบบเคลื่อนย้าย 425A
Filter type	ไส้กรองแบบตลับ
Number of filter elements	1
Type of hose	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Weight (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Note	



เครื่องดูดแบบเคลื่อนย้าย 425A


Description	รุ่น
425A - NE52	42142500

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC	สูญญากาศแม่ทอร์ช 84 ที่โพลีเอทิลีน ภายในรัศมีตัด 60mm เสริมด้วยเหล็กกลีวยฝังตัว	- 20 deg. C. to + 70 Deg. C.				

เครื่องดูดแบบเคลื่อนย้าย 425A

อุปกรณ์เสริม		หมายเลขชิ้นส่วน
	Control S for NE86-96	43222008
	Control S for NE 22-76	43220026
	Control S for NE 22-76	43220001

เครื่องดูดแบบเคลื่อนย้าย 425A

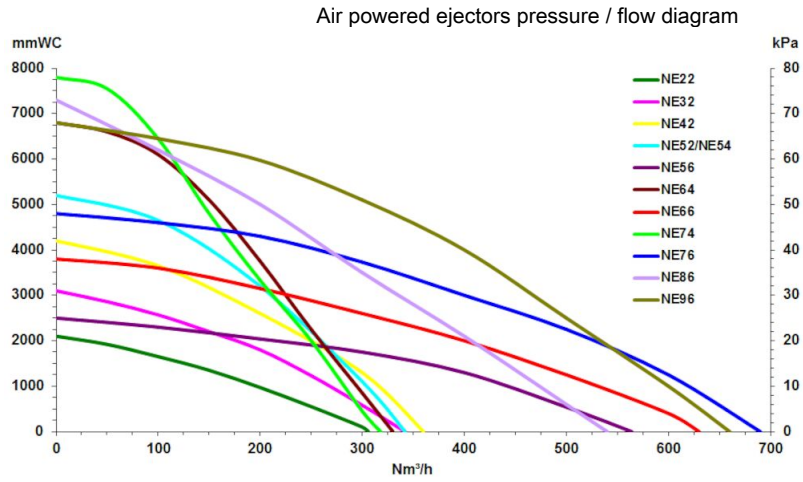

Air Powered ejectors

All performance data are based on 7 bar supply pressure