

425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Medya	425A
Filtre türü	[cartridge]
Filtre adedi	1
Hortum tipi	PVC
Compressed air requirement	3,0 Nm ³ /dakika
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Ağırlık (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Teknik bilgi onayı	






425A


Bilgi Dökümanı ismi	[model]
425A - NE52	42142500

Hortum tipi	Özellikler	Isı aralığı °C	Hortum bağlantısız uç, dağıtım hortumu	Hortum bağlantısız uç, hortum girişi	Hortum bağlantısı sarma mekanizması üzerinde, dağıtım hortumu	Hortum bağlantısı sarma mekanizması üzerinde, hortum girişi
PVC	Max vakum 84 kPa yarıçapı 60mm gömülü çelik helis ile güçlendirilmiştir	- 20 deg. C. to + 70 Deg. C.				

425A

	[accessory]	[partno]
	NE86-96 için kontrol S	43222008
	NE 22-76 için kontrol S	43220026
	NE 22-76 için kontrol S	43220001

425A

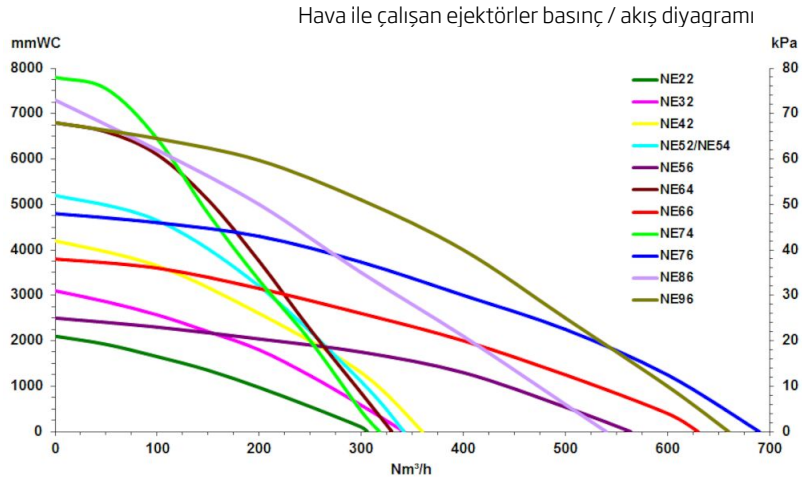

Air Powered ejectors

All performance data are based on 7 bar supply pressure