

OMF 2000

FibreDrain® oil mist collector for continuous operation.



Nederman OMF oil mist eliminators are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.


Nederman OMF 2000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OMF units are prepared for use of pre filter. OMF 2000 have an built-in radial fan.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two inlet \varnothing 200 mm with clamp ring connection
- Starter and motor protection included

| | |
|--|--|
| Product name | OMF 2000 |
| Standard | 2009/125/EC |
| Volume (for shipping) (m ³) | 2.45 |
| Noise level (dB(A)) | 50 Hz: 66 dB(A) @1,5 m from service side 60 Hz: 68 dB(A) @1,5 m from service side |
| Protection class | IP55 |
| Filter efficiency (%) | 99,95 |
| Installation | [Indoor] |
| Material | Sheet metal, painted both in- and outside. |
| Working pressure (kPa) | Max 2500 Pa |
| Capacity (max airflow m ³ /h) | 2000 |
| Operating Temperature | 40 deg C (inbuilt fan) |
| Power Voltage (V) | 230/400 |
| Frequency (Hz) | 50 |
| No of phases | 3 |
| Number of filter elements | 3 |
| Amperage (A) | 7,6 / 4,4 |
| Colour | NCS-S 1005 B20G |
| Weight (kg) | 250 |
| Power (kW) | 2,2 |
| Note | Plus 1 optinal filter element. Incl extension legs |






OMF 2000

| Image | Description | Model |
|---|--|-----------|
|  | OMF 2000, Inlet 2 x ø 200 mm clamp ring left or right. Drain 2 x 1" Female | 12400008* |

**Plus 1 optimal filter element. Incl extension legs*


OMF 2000

| | Accessory | Part No |
|---|--|------------|
|  | Drain pump box, 50 Hz | 12400054* |
|  | Drain container with piping | 12400764** |
|  | Optional FibreDrain Pre Filter ORF 610x610x96 mm. | 12400039 |
|  | FibreDrain Filter 1 OMF; 600x600x292 mm | 12400009 |
|  | FibreDrain Filter 2 OMF; 600x600x292 mm | 12400010 |
|  | HEPA Filter H13 610x610x292 mm | 12400012 |
|  | Outlet transition, ø 200 mm, for OSF 1000 / OSF 1000-2 / OMF 1000-2 / OMF 2000 | 12400904 |
|  | Outlet transition, ø 250 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000 | 12400905 |
|  | Outlet transition, ø 315 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000 | 12400906 |
|  | Drain pump box, 50 Hz, 10 litre/min at 10m, including controller | 12401330 |
|  | Frequency inverter with 2kPa pressure sensor. 2,2kW | 73008914 |

*Drain connection must be elevated min 200 mm from pump box support level

**Drain connection must be elevated min 420mm from container support level

OMF 2000

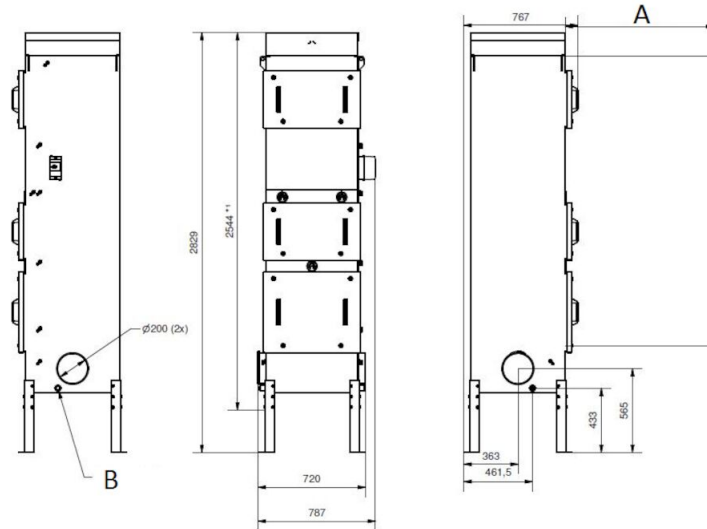

A) 1000 min filler service space

B) Drain stud (x2)