

## OMF 4000

FibreDrain® oil mist collector for continuous operation.



The Nederman OMF (Oil Mist Filter) is designed to handle large amounts of oil mist during continuous operation. They are engineered for high efficiency filtration coupled with lower maintenance costs.


The OMF 4000 has an external, top mounted, fan assembly and three-stage filtration, as standard. The first two stages consist of filter cassettes with Nederman's FibreDrain® technology. The third stage is a class H13 HEPA filter with a 99.95% efficiency for MPPS, per EN1822. All tower-style OMF units are designed to accept an optional pre-filter. Nederman offers a wide selection of filters to fit a range of different applications.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two (2) Ø315mm inlet locations, one blanked using clamp ring connection.

Product name	OMF 4000
Standard	2009/125/EC
Volume (for shipping) (ft³)	204.12
Noise level (dB(A))	70 dB(A) @ 5' from service side, with optional external silencer.
Protection class	IP55
Filter efficiency (%)	99,95
Installation	[Indoor]
Material	Sheet metal, painted inside and outside.
Working pressure (psi)	16.0" (External)
Capacity (max airflow cfm)	2354
Operating Temperature	140° F (limited by filter media).
Power Voltage (V)	460
Frequency (Hz)	60
No of phases	3
Number of filter elements	6
Amperage (A)	14.2
Colour	NCS-S 1005 B20G
Weight (lbs)	783
Power (Hp)	10.0 HP (7.5 kW) *Requires external starter (not included).
Note	Plus 2 optional filter elements. Incl extension legs.












## OMF 4000

[image]	Description	[model]
	OMF 4000, Inlet 2 x ø 315 mm clamp ring left or right. Drain 2 x 1" Female	12400964*

*\*Plus 2 optional filter elements. Incl extension legs.*


## OMF 4000

	[accessory]	[partno]
	Drain container with piping	12400764*
	Silencer 90° Ø315	12400016
	Transition NF 7,5 kW / Ø 315 / 1005	12400988
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	HEPA Filter H13 610x610x292 mm	12400012
	Drain pump box, 60 Hz, 10 litre/min at 5m, excluding controller	12401329**
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 7,5kW	73008917
	Frequency inverter with 5kPa pressure sensor. 11kW	73008918

\*Drain connection must be elevated min 420mm from container support level

\*\*Controller available on request.

## OMF 4000

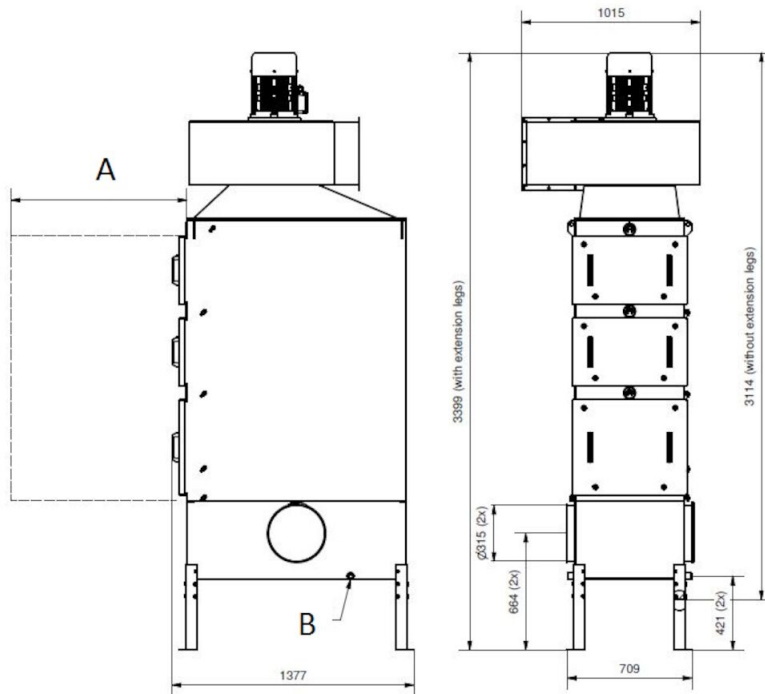

A) 1000 min filler service space

B) Drainage DN25 (2x)