

NCF DX








ATEX-godkjente NCF DX-vifter

Nederman NCF DX er kraftige, sentrale vifter med en robust konstruksjon av sveiset stål. NCF DX er godkjent for brennbart støv i sone 22 i samsvar med ATEX-direktivene 2014/34/EC gruppe 2, kategori 3.

Produktnavn	NCF DX
Ambient temperature range	-30 to +40 °C (-22 F to 104 F)
Driftstemperatur	Max 40 °C
Spenning (V)	400
Frekvens Hz	50
Antall faser	3





NCF DX

Bilde	Navn på datablad	Strömstyrke (A)	Noise level (dB(A))	Vekt (kg)	Kraft (kW)	Model
	Fan NCF DX 40/25	10,3	75 db(A) vid 4000 m ³ /h	110	5,5	14530128
	Fan NCF DX 50/25	13,8	78 db(A) at 3500 m ³ /h	120	7,5	14530228
	Fan NCF DX 80/25	20	77 db(A) at 6000 m ³ /h	205	11	14530328
	Fan NCF DX 120/25	26,5	82 db(A) vid 8000 m ³ /h	232	15	14530428
	Fan NCF DX 160/25	39,5/22,7	85 db(A) vid 10000 m ³ /h	319	22	14530528


NCF DX

Tilbehør		Artikkelnummer
	Innløpsadap.. d250,30/15,40/25,50/25	14374438
	Innløpsadapter d400,80/20,120/25	14374440
	Innløpsadapter d500,120/15,160/25	14374441
	Utl.adap..288x205 d315,30/15,40/25	14374442
	Utl.adap..361x256 d400,80/20,120/25	14374444
	Utl.adap..453x322d500,120/15,160/25	14374445
	Utl.adap..256x183 d250,50/25,30/20	14374446
	Fleks.inl.ad.d250,30/15,40/25,50/25	14374447
	Fleks.innløp.adap.d400,80/20,120/25	14374449
	Fleks.innløp.adap.d500,120/15,160/25	14374450
	Fleks. utl.a.288x205 d315,30/15,40/25	14374451
	Fleks. utl.a.361x256d400,80/20,120/25	14374453
	Fleks. utl.a.453x322d500,120/15,160/25	14374454
	Fleks. utl.a.256x183 d250,50/25,30/20	14374455
	Innløpsgitter d250,30/15,40/25,50/25	14374456
	Vernegitter innløp d400,80/20,120/25	14374458
	Vernegitter innløp d500,120/15,160/25	14374459
	Vernegitter utløp,30/15,40/25	14374460
	Vernegitter utløp,80/20,120/25	14374462
	Vernegitter utløp,120/15,160/25	14374463
	Vernegitter utløp,50/25	14374464
	Fan starter 5,5kW with PTC (2,2 - 5,5 kW motor power)	14515637

NCF DX

Tilbehør		Artikkelnummer
	Fan starter 11kW with PTC (4,0 - 11,0 kW motor power)	14515737
	Fan starter 18.5kW with PTC (15,0 - 18,5 kW motor power)	14515837

NCF DX

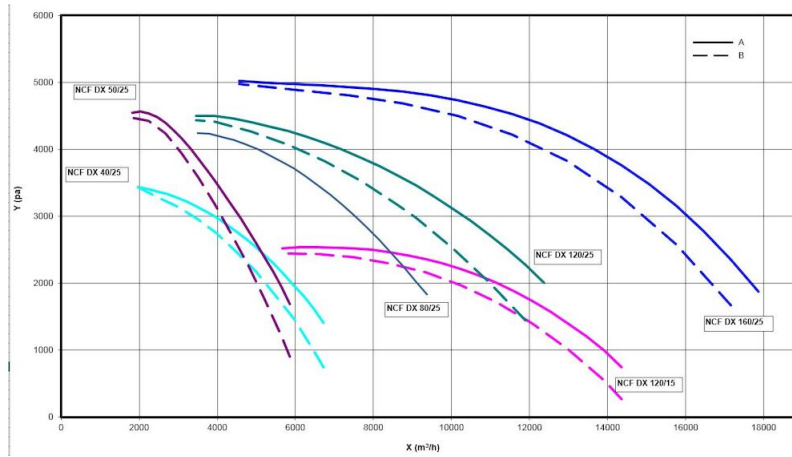

Y = Pressure drop

X = Air flow

A = Total pressure

B = Static pressure