

NCF DX








Ventiladores NCF DX com aprovação ATEX

Os Nederman NCF DX são ventiladores potentes com uma construção robusta em aço soldado. O NCF DX é aprovado para poeiras combustíveis na zona 22, em conformidade com as diretivas ATEX 2014/34/EC Grupo 2, de categoria 3.

Produto	NCF DX
Ambient temperature range	-30 to +40 °C (-22 F to 104 F)
Operating Temperature	Max 40 °C
Voltagem (V)	400
Frequência (Hz)	50
Nº de fases	3





NCF DX

Imagem	Descrição	Amperagem (A)	Índice de ruído (dB(A))	Peso (kg)	Potência /kW	Modelo
	Fan NCF DX 40/25	10,3	75 db(A) vid 4000 m ³ /h	110	5,5	14530128
	Fan NCF DX 50/25	13,8	78 db(A) at 3500 m ³ /h	120	7,5	14530228
	Fan NCF DX 80/25	20	77 db(A) at 6000 m ³ /h	205	11	14530328
	Fan NCF DX 120/25	26,5	82 db(A) vid 8000 m ³ /h	232	15	14530428
	Fan NCF DX 160/25	39,5/22,7	85 db(A) vid 10000 m ³ /h	319	22	14530528


NCF DX

Acessório		Artigo nº
	Entrada adap. d250,30/15,40/25,50/25	14374438
	Entrada Adaptador d400, 80/20, 120/25	14374440
	Entrada Adaptador d500, 120/15, 160/25	14374441
	Adaptador de saída 288x205 d315,30/15,40/25	14374442
	Adaptador de saída 361x256 d400,80/20,120/25	14374444
	Adaptador de saída 453x322 d500,120/15,160/25	14374445
	Adaptador de saída 256x183 d250, 50/25,30/20	14374446
	Adaptador de saída flexível. d250,30/15,40/25,50/25	14374447
	Adaptador de entrada flexível. d400, 80/20, 120/25	14374449
	Adaptador de entrada flexível. d500,120/15,160/25	14374450
	Adaptador de saída flexível 288x205 d315,30/15,40/25	14374451
	Adaptador de saída flexível 361x256 d400,80/20,120/25	14374453
	Adaptador de saída flexível 453x322 d500,120/15,160/25	14374454
	Adaptador de saída flexível 256x183 d250, 50/25,30/20	14374455
	Entrada com proteção de rede d250,30/15,40/25,50/25	14374456
	Entrada proteção de rede d400, 80/20, 120/25	14374458
	Entrada proteção de rede d500,120/15,160/25	14374459
	Saída proteção de rede, 30/15, 40/25	14374460
	Saída proteção de rede, 80/20, 120/25	14374462
	Saída proteção de rede, 120/15, 160/25	14374463
	Saída proteção de rede, 50/25	14374464
	Fan starter 5,5kW with PTC (2,2 - 5,5 kW motor power)	14515637

NCF DX

Acessório		Artigo nº
	Fan starter 11kW with PTC (4,0 - 11,0 kW motor power)	14515737
	Fan starter 18.5kW with PTC (15,0 - 18,5 kW motor power)	14515837

NCF DX

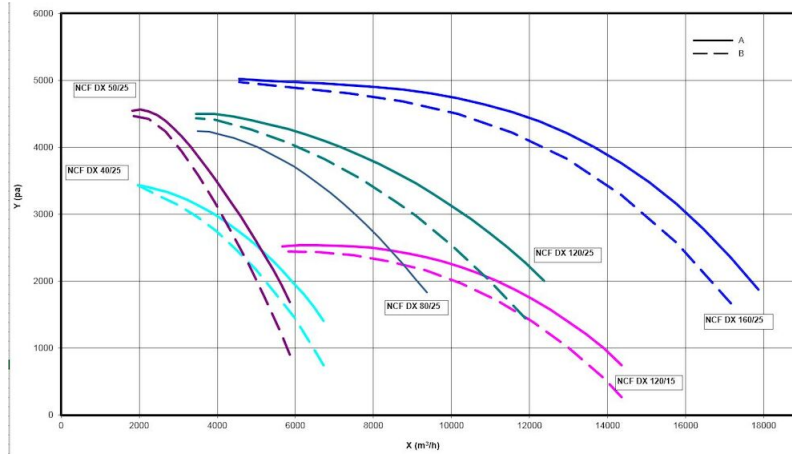

Y = Pressure drop

X = Air flow

A = Total pressure

B = Static pressure