

## NCF DX

---

ATEX认可的NCF Dx风机

尼的曼 NCF DX是强大的中央风机，有着稳健的焊接钢结构。根据 ATEX指令2014/34/EC 2组3类，NCF DX可用于处理22区的可燃粉尘。



品名	NCF DX
环境温度范围	-30 to +40 ° C (-22 F to 104 F)
工作温度	Max 40 ° C
电压 (V)	400
频率 (Hz)	50
电源相数	3





## NCF DX

[image]	产品名称	安培数 (安)	Noise level (dB(A))	重量 (公斤)	功率 (kW)	产品编号
	Fan NCF DX 40/25	10,3	75 db(A) vid 4000 m <sup>3</sup> /h	110	5,5	14530128
	Fan NCF DX 50/25	13,8	78 db(A) at 3500 m/h	120	7,5	14530228
	Fan NCF DX 80/25	20	77 db(A) at 6000 m/h	205	11	14530328
	Fan NCF DX 120/25	26,5	82 db(A) vid 8000 m/h	232	15	14530428
	Fan NCF DX 160/25	39,5/22,7	85 db(A) vid 10000 m/h	319	22	14530528


## NCF DX

附件		产品编号
	进风口转接器, d250, 30/15, 40/25, 5	14374438
	进风口转接器, d400, 80/20, 120/25	14374440
	进风口转接器 d500, 120/15, 160/25	14374441
	出风口转接器, 288x205, d315, 30/15	14374442
	出风口转接器, 361x256, d400, 80/20	14374444
	出风口转接器, .453x322d500,120/15,160/25	14374445
	出风口转接器, 256x183, d250, 50/25	14374446
	进风口活动转接器, d250, 30/15, 40/2	14374447
	进风口活动转接器, d400, 80/20, 120/	14374449
	进风口活动转接器, d500, 120/15, 160	14374450
	出风口活动转接器, 288x205, d315, 30	14374451
	出风口活动转接器, 361x256, d400, 80	14374453
	出风口活动转接器, 453x322, d500, 12	14374454
	出风口活动转接器, 256x183, d250, 50	14374455
	进风口安全网罩, d250, 30/15, 40/25	14374456
	进风口安全网罩, d400, 80/20, 120/25	14374458
	进风口安全网罩, d500, 120/15, 160/2	14374459
	出风口安全网罩, 30/15, 40/25	14374460
	出风口安全网罩, 80/20, 120/25	14374462
	出风口安全网罩, 120/15, 160/25	14374463
	出风口安全网罩, 50/25	14374464
	Fan starter 5.5kW with PTC (2,2 – 5,5 kW motor power)	14515637

## NCF DX

附件		产品编号
	Fan starter 11kW with PTC (4,0 – 11,0 kW motor power)	14515737
	Fan starter 18.5kW with PTC (15,0 – 18,5 kW motor power)	14515837

## NCF DX

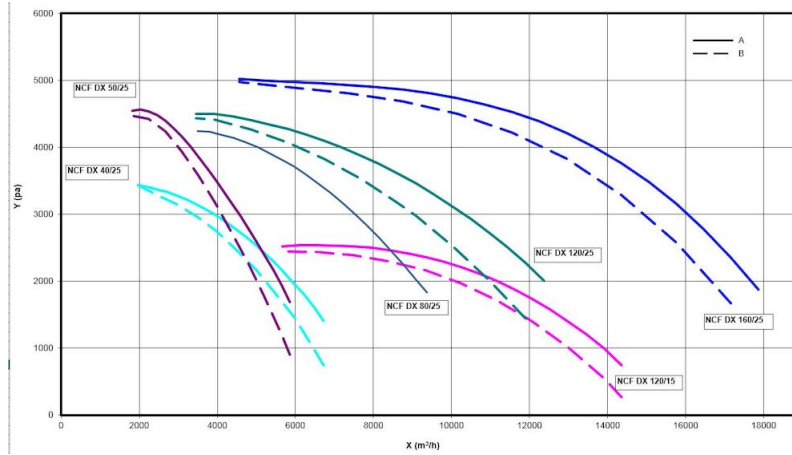

Y = Pressure drop

X = Air flow

A = Total pressure

B = Static pressure