


## 带隔音外壳的NCF风机



尼的曼 NCF 风机隔音装置很完备，包括风机、风机和内盒之间的灵活接头、振动吸收器和两个电气连接的电缆密封压盖。风机电机单独冷却。

所有隔音装置室内室外均可用，并可用叉车从底部提升。

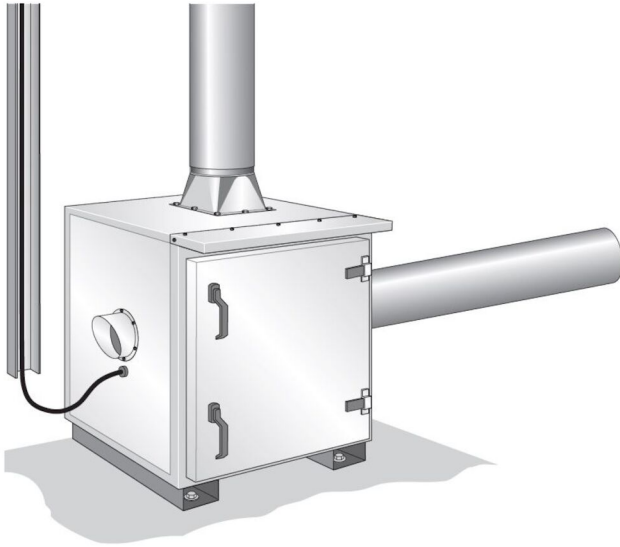







外壳由镀锌薄钢板制成。两种尺寸的隔音装置可覆盖所有NCF的风机。

元件厚度100 mm  
绝缘材料:100mm矿物纤维  
铰链门，900 x900mm，带两个把手


品名	带隔音外壳的NCF风机
安装	室内, 室外
材料	镀锌金属板
环境温度范围	-30 to +40 ° C (-22 F to 104 F)
工作温度	Max 40 ° C
频率 (Hz)	50
电源相数	3



## 带隔音外壳的NCF风机

[image]	电压 (V)	安培数 (安)	重量 (公斤)	功率 (kW)	产品编号
	230/400	7,9 / 4,6	272	2,2	14560128
	400/690	7,8 / 4,5	325	4	14560328
	400/690	10,3 / 6,0	366	5,5	14560428
	400/690	10,3 / 6,0	361	5,5	14560528
	400/690	13,8 / 8,0	390	7,5	14560628
	400/690	13,8 / 8,0	390	7,5	14560228
	400/690	26,5 / 15,3	588	15	14560728
	400/690	32,5 / 18,8	628	18,5	14560828

## 带隔音外壳的NCF风机

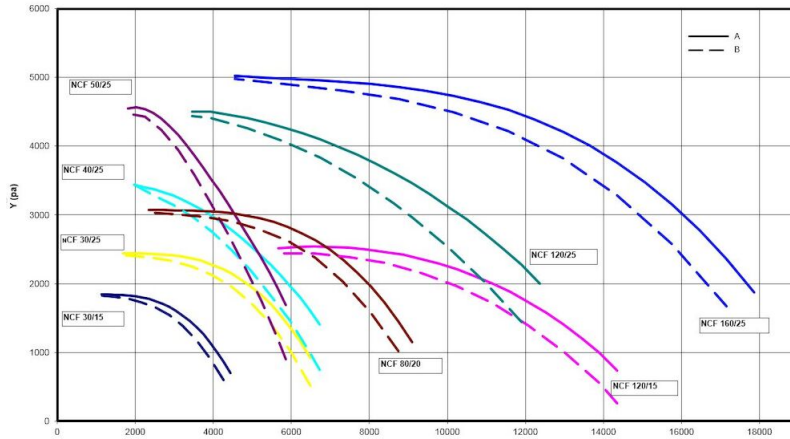


Y = Pressure drop

X = Air flow

A = Total pressure


B = Static pressure

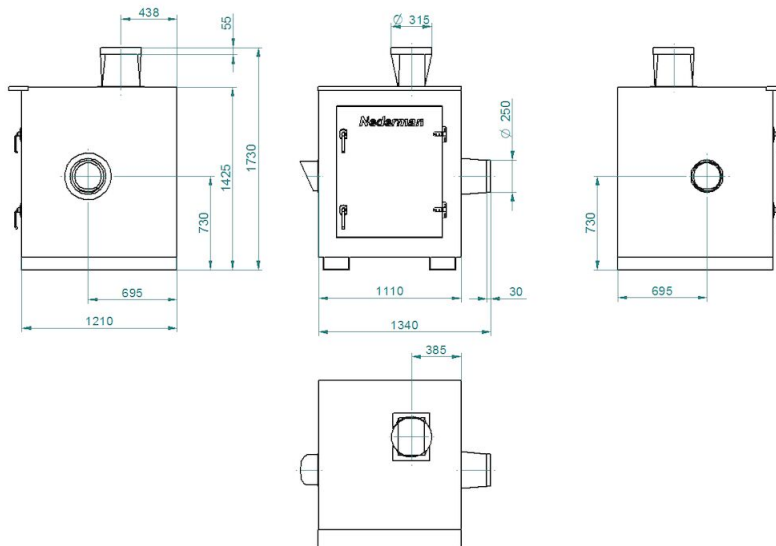


Dimension:

Art. no. 14560128: SE 30/15 230/400V

## 带隔音外壳的NCF风机

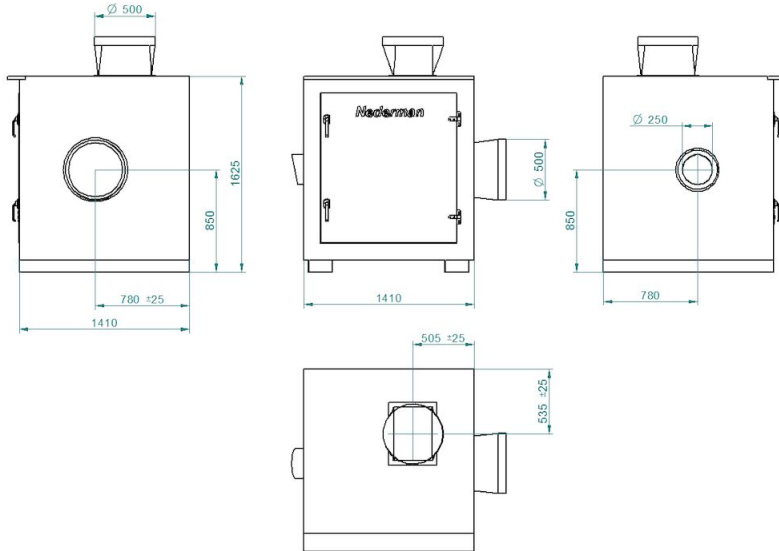


Dimension:  
Item no. 14560228: SE 120/15 400/690V

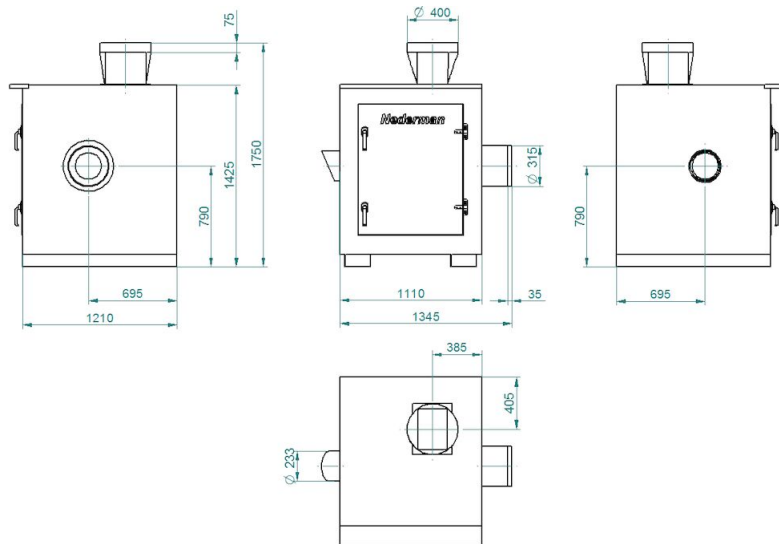


Dimension:  
Item no. 14560328: SE 30/25 400/690V

## 带隔音外壳的NCF风机

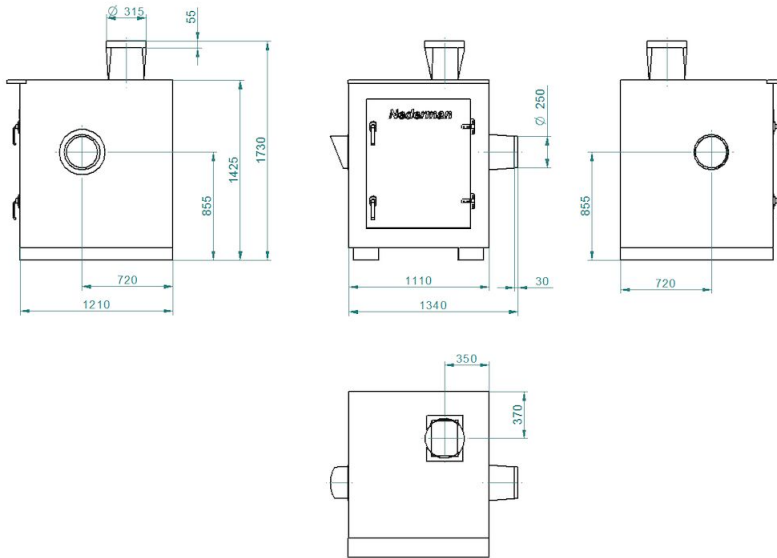


Dimension:  
Item no. 14560428: SE 40/25 400/690V

## 带隔音外壳的NCF风机

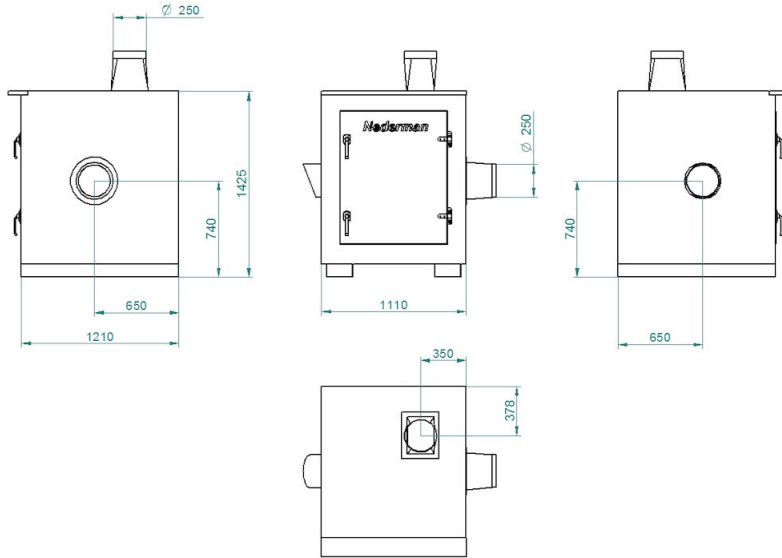


Dimension:  
Item no. 14560528: SE 50/25 400/690V

## 带隔音外壳的NCF风机

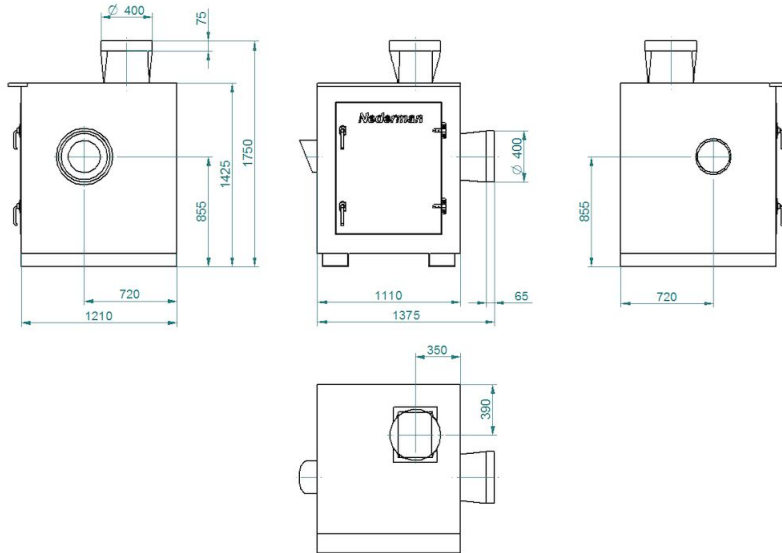


Dimension:  
Item no. 14560628: SE 80/20 400/690V

## 带隔音外壳的NCF风机

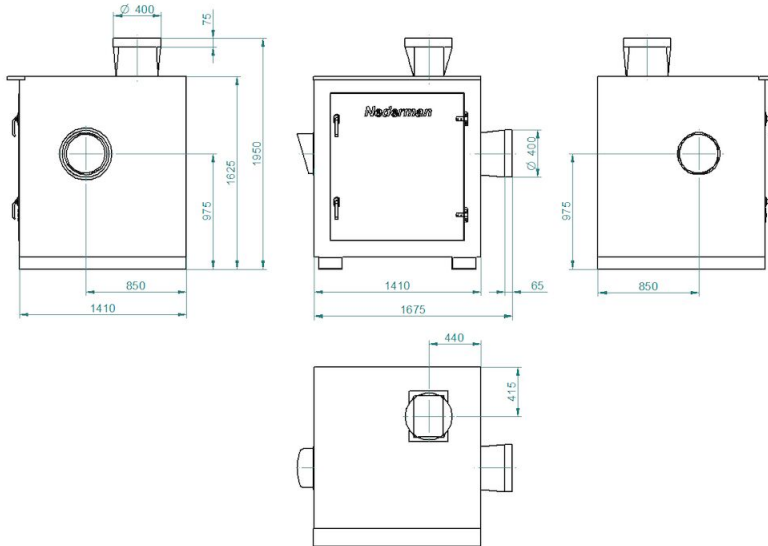

Dimension:  
Item no. 14560728: SE 120/25 400/690V

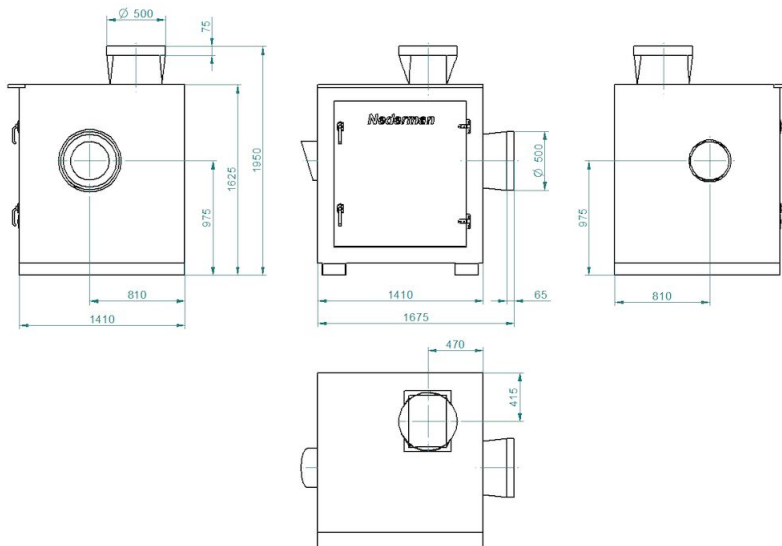

Dimension:  
Item no. 14560828: SE 160/25 400/690V