


Hoses Bench Top







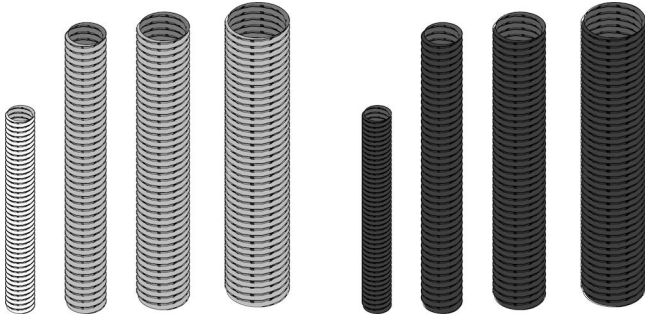



Hoses suitable for bench top applications. Available in normal and ESD versions.

Product name

Hoses Bench Top



Hoses Bench Top

[Image]	Description	Diameter (mm)	Length (m)	[model]
	Hose, White	45	3	70501644
	Hose, Black ESD	45	3	70502044
	FX-Hose-D75-L3000-Grey	75	3	70377098
	FX-Hose-D100-L3000-Grey- Flexible hose in grey PVC with 100 mm (4 inch) diameter and 3000 mm (118.11 inch) length. It shall be used with hose support ring to connect hose to arm.	100	3	70377099
	FX-Hose D125-L5000-Grey- Flexible hose in grey PVC with 125 mm (5 inch) diameter and 5000 mm (195.85 inch) length. It shall be used with hose support ring to connect hose to arm.	125	5	70377100
	FX-Hose-ESD-D75-L3000-Black- Flexible hose in black conductive PE with 75 mm (3 inch) diameter and 3000 mm (118.11 inch) length. It shall be used with hose support ring to connect hose to arm.	75	3	70377101
	FX-Hose-ESD-D125-L5000-Black- Flexible hose in black conductive PE with 125 mm (5 inch) diameter and 5000 mm (195.85 inch) length. It shall be used with hose support ring to connect hose to arm.	125	5	70377103
	FX-Hose-ESD-D100-L3000-Black- Flexible hose in black conductive PE with 100 mm (4 inch) diameter and 3000 mm (118.11 inch) length. It shall be used with hose support ring to connect hose to arm.	100	3	70377102