

## L-PAK 150 Advanced

A compact stationary high vacuum unit with high filter efficiency and enhanced flexibility and advanced features

# L-PAK 150 Advanced

The Nederman L–PAK offers the ideal solution for removing dust and fumes in all types of industries. Typical areas of applications can be found in welding shops, car body shops, construction industries, bakeries, industrial laundries, etc. The L–PAK is also perfect for cleaning of the workplace and the workshop floor. The L–PAK is easy to position and move due to its compact design, its low weight and the frame for fork lift handling. The integrated PLC–control ensure high functionality and can easily be updated with new functions. The automatic start/stop will save energy as well as extend the lifetime of the unit. The remote start/stop function makes it easy to ensure that everything is shut off when you go home from work.

#### Safe use

The duty idling and the temperature control functions reduce the risk of the fan getting overheated. There is also an indicator to show when service is required.

#### Unique and economic filter concept

The filter concept in L-PAK is unique as it combines high filter efficiency with long lifetime. A dynamic reducer separates coarse particles. Fine particles are separated on surface treated filter for a long lifetime. The PTFE fine filter is standard in the Advanced model but can easily be replaced by an antistatic filter if needed. You may also add a micro filter to filtrate even the finest particles.

#### Automatic filter cleaning as standard.

Continuous high performance is obtained by automatic filter cleaning (as standard). L-PAK uses filter cleaning by a short blast of reversed atmospheric air. By the rapid opening of a valve located on top of the filters, a powerful air pulse is created, efficiently dislodging dust from the filter socks.

#### Complete and ready to use

We can deliver complete installations but if you prefer to install your own system, this is very easy to do. Nederman can also offer a vast range of accessories like cleaning equipment, vacuum valves, swing arms and grinding tools with integrated fume and dust extraction.

The L–PAK Advanced models offers extra features such as improved sound insultation and enhanced functions in the PLC/control system that can handle extra external signals (DPS, BLI, pilot signal etc), adjustable cleaning cycle, start / stop timer functions etc.

Easy to install Low noise level Low running and maintenance costs

# L-PAK 150 Advanced

品名       L-PAK 150 Advanced         噪音水平(分贝)       62         安装       室内         清灰方式       反吹风清灰         应用       沙砾,粉尘,烟气,切屑,颗粒物         工作压力(千帕)       15         最大风量(m3/h)       290         过滤面积(平方米)       1,1         电压(V)       400         频率(Hz)       50         电源相数       3         除尘器类型       滤袋         滤芯       PTFE         Max airflow (m/h)       290         Capacity (max airflow m3/h)       150 at -15 kPa         Max vaccum (kPa)       -22         Inlet       100 mm         重量(公斤)       110         Outlet       100 mm         功率 (kW)       3			
噪音水平(分贝)62安装室内清灰方式反吹风清灰应用沙砾、粉尘、烟气、切屑、颗粒物工作压力(千帕)15最大风量(m3/h)290过滤面积(平方米)1,1电压(V)400频率(Hz)50电源相数3除尘器类型滤袋滤芯PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量(公斤)110Outlet100 mm功率 (kW)3			
噪音水平(分贝)62安装室内清灰方式反吹风清灰应用沙砾、粉尘,烟气、切屑,颗粒物工作压力(千帕)15最大风量(m3/h)290过滤面积(平方米)1,1电压(V)400频率(Hz)50电源相数3除尘器类型滤袋滤芯PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量(公斤)110Outlet100 mm功率 (kW)3		品名	L-PAK 150 Advanced
安装室内清灰方式反吹风清灰应用沙砥,粉尘,烟气,切屑,颗粒物工作压力(千帕)15最大风量(m3/h)290过滤面积(平方米)1,1电压(V)400频率(Hz)50电源相数3除尘器类型滤袋滤芯数量1北方数量150 at -15 kPaMax airflow (m/h)290Capacity (max airflow m3/h)150 at -15 kPaInlet100 mm重量(公斤)110Outlet100 mm功率 (kW)3			
清灰方式 反吹风清灰 应用 沙砾,粉尘,烟气,切屑,颗粒物 工作压力(千帕) 15 最大风量(m3/h) 290 过滤面积(平方米) 1,1 电压(V) 400 频率(Hz) 50 电源相数 3 除尘器类型 滤袋 滤芯数量 1 滤芯 PTFE Max airflow (m/h) 290 Capacity (max airflow m3/h) 150 at −15 kPa Max vaccum (kPa) -22 Inlet 100 mm 重量(公斤) 110 Outlet 100 mm			室内
应用沙砾, 粉尘, 烟气, 钡屑, 颗粒物工作压力(千帕)15最大风量(m3/h)290过滤面积(平方米)1,1电压(V)400频率(Hz)50电源相数3除尘器类型滤袋滤芯数量1追芯PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量(公斤)110Outlet100 mm功率 (kW)3			
工作压力(干帕)15最大风量(m3/h)290过滤面积(平方米)1,1电压(V)400频率(H2)50电源相数3除尘器类型滤袋滤芯数量1滤芯PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量(公斤)110Outlet100 mm丁率 (kW)3			
最大风量 (m3/h)290过滤面积 (平方米)1,1电压 (V)400频率 (Hz)50电源相数3除尘器类型滤袋滤芯数量1滤芯PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量 (公斤)110Outlet100 mm丁率 (kW)3			
<ul> <li>过滤面积(平方米)</li> <li>1,1</li> <li>电压(V)</li> <li>400</li> <li>频率(Hz)</li> <li>50</li> <li>电源相数</li> <li>3</li> <li>除全器类型</li> <li>滤袋</li> <li>加</li> <li>波数量</li> <li>1</li> <li>滤芯</li> <li>PTFE</li> <li>Max airflow (m/h)</li> <li>290</li> <li>Capacity (max airflow m3/h)</li> <li>150 at −15 kPa</li> <li>Max vaccum (kPa)</li> <li>−22</li> <li>Inlet</li> <li>100 mm</li> <li>重量(公斤)</li> <li>110</li> <li>Outlet</li> <li>100 mm</li> <li>可承 (kW)</li> <li>3</li> </ul>			
<ul> <li>电压(V) 400</li> <li>频率(Hz) 50</li> <li>电源相数 3</li> <li>除尘器类型 滤袋</li> <li>滤芯数量 1</li> <li>滤芯 PTFE</li> <li>Max airflow (m/h) 290</li> <li>Capacity (max airflow m3/h) 150 at −15 kPa</li> <li>Max vaccum (kPa) -22</li> <li>Inlet 100 mm</li> <li>重量(公斤) 110</li> <li>Outlet 100 mm</li> <li>功率 (kW) 3</li> </ul>			1,1
电源相数3除尘器类型滤袋滤芯数量1滤芯数量PTFEMax airflow (m/h)290Capacity (max airflow m3/h)150 at −15 kPaMax vaccum (kPa)-22Inlet100 mm重量 (公斤)110Outlet100 mm功率 (kW)3C €			
除尘器类型滤袋滤芯数量1滤芯数量PTFE滴ax airflow (m/h)290Capacity (max airflow m3/h)150 at -15 kPaMax vaccum (kPa)-22Inlet100 mm重量(公斤)110Outlet100 mm功率 (kW)3		频率 (Hz)	50
<ul> <li>滤芯数量 1</li> <li>滤芯 PTFE</li> <li>Max airflow (m/h) 290</li> <li>Capacity (max airflow m3/h) 150 at −15 kPa</li> <li>Max vaccum (kPa) -22</li> <li>Inlet 100 mm</li> <li>重量(公斤) 110</li> <li>Outlet 100 mm</li> <li>功率 (kW) 3</li> </ul>		电源相数	3
滤芯 PTFE Max airflow (m/h) 290 Capacity (max airflow m3/h) 150 at −15 kPa Max vaccum (kPa) -22 Inlet 100 mm 重量(公斤) 110 Outlet 100 mm 功率 (kW) 3		除尘器类型	滤袋
Max airflow (m/h)       290         Capacity (max airflow m3/h)       150 at -15 kPa         Max vaccum (kPa)       -22         Inlet       100 mm         重量(公斤)       110         Outlet       100 mm         功率 (kW)       3		滤芯数量	1
Capacity (max airflow m3/h)       150 at -15 kPa         Max vaccum (kPa)       -22         Inlet       100 mm         重量(公斤)       110         Outlet       100 mm         功率 (kW)       3		滤芯	PTFE
Max vaccum (kPa)       -22         Inlet       100 mm         重量(公斤)       110         Outlet       100 mm         功率(kW)       3		Max airflow (m/h)	290
Inlet       100 mm         重量(公斤)       110         Outlet       100 mm         功率(kW)       3		Capacity (max airflow m3/h)	150 at -15 kPa
重量(公斤) 110 Outlet 100 mm 功率(kW) 3		Max vaccum (kPa)	-22
Outlet       100 mm         功率 (kW)       3         下       反         反       反         反       反         反       反         反       反         反       反         日       日		Inlet	100 mm
功率 (kW) 3 「 入 、  、  、  、  、  、  、  、  、  、  、  、  、		重量(公斤)	110
Σ. 🔊 🔊 Σ. Ο Ε		Outlet	
		功率 (kW)	3
		A A	🔈 🞑 👧 🔊 CE



## L-PAK 150 Advanced


产品编号 40051960



# L-PAK 150 Advanced

	附件	产品编号
I	Replacement Microfilter (D=140 x 350)	40114110
	Replacement bagfilter (PTFE)	40119422
<u>J</u>	Grating spiro 100mm	40130220
	Bend spiro BU 100mm 90dgr	40130820

### L-PAK 150 Advanced

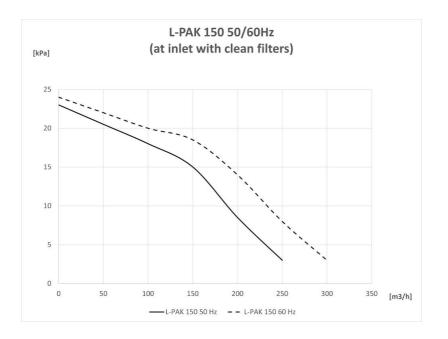



The optional hood reduces the noise down to: 62 dB(A) for L–PAK 150 and 64 dB(A) for L–PAK 250.

### L-PAK 150 Advanced



The plastic bin liner is easy to change



