

A self-contained downdraft table used for extraction and filtering of dust and odour.



www.nederman.com

The Nederman Filterbench Carbon range of downdraught benches are designed to control airborne particulate and odour arising from gluing, de-greasing, painting and similar applications. The FilterBench Carbon is available in three different sizes. Easy to use and always with extraction at hand. The FilterBench Carbon should not be used in an environment with danger of explosions or for dust in explosive concentrations. The FilterBench should not be used for hot or spark generating processes such as welding fumes or metal grinding.

- · Easy to use and always with extraction at hand
- Pre-filter (G4) and carbon filters as standard
- Simple on/off push button control making the product easy to understand and operate
- Fan inverter included as standard making it possible to optimize air flow and minimize energy consumption
- Castors with swivel and brake included as standard making the product easy and safe to move and position

Product name	FilterBench Downdraft Table with carbon filter
Filter efficiency (%)	99,9
Installation	ในอาคาร
Application	ฝุ่น, ควัน
Arm length (m)	
Power Voltage (V)	230
Frequency (Hz)	50
No of phases	1
Filter material	
Electric plug	ยุโรป (CEE 7/2 P+E)
Mounting	เคลื่อนที่ได้
Filter cleaning method	กรองแบบทางเดียว










รูปภาพ	Description	Max airflow (m³/h)	Weight (kg)	Power (kW)	รุ่น
	โต๊ะดูดฝุ่น Filter bench 23, พรอมไสกรอง คารบอน	2300	230	0,5	73000119
	โต๊ะดูดฝุ่น FilterBench 23S, พรอมใสกรอง คารบอน	2300	280	0,5	73000538
	โต๊ะดูดฝุ่น Filter bench 46, พรอมใสกรอง คารบอน	4600	340	1	73000120
	โต๊ะดูดฝุ่น Filter bench 69, พรอมใส่กรอง คารบอน	6900	470	1,5	73000121



อุปกรณ์เสริม		หมายเลขชิ้นส่วน
	Plain rubber mat 740 × 300 × 5mm	73000072
	Perforated rubber mat 740 × 770 × 5mm FB -sp	73000082



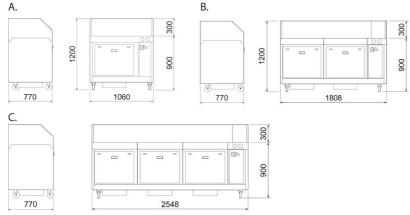

A: FilterBench 23 B: FilterBench 46 C:FilterBench 69