

Fan N40







A centrifugal fan mainly designed for use with Nederman extraction products.

- Compact
- Easy to use





Product name	Fan N40
Noise level (dB(A))	70 at 2500 m ³ /h
Installation	Indoor, Outdoor
Material	casings: Sheet metal steel Impeller: Sheet metal steel
Airflow (CFM)	2500 (1,5 kW), 4000 (2,2 kW)
Capacity (max airflow cfm)	2350
Ambient temperature range	-20 to +40 C (-4 F to 104 F)
Operating Temperature	Max 140 F (60 C)
No of phases	3




Fan N40

Image	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Weight (lbs)	Power (Hp)	Model
	230/460	60	7,3/3,6	66	3.0 (2.2 Kw)	14510223
	230/400	50	8/4,6	64	3.0 (2.2 Kw)	14510123
	230/400	50	5,5/3,2	55	2.0 (1.5 Kw)	14510623
	575	60	3,2	66	3.0 (2.2 Kw)	14511723

Fan N40

Accessory		Part No
	FMS 2.5-4 Fan Manual Starter incl. motor protector 2.5-4A	14502337
	FMS 4,0 - 6.3	14502437
	Bracket for fan n40	14510226
	Manual fan control. 3,2 - 11,5 A, 3 phase.	14518737

Fan N40

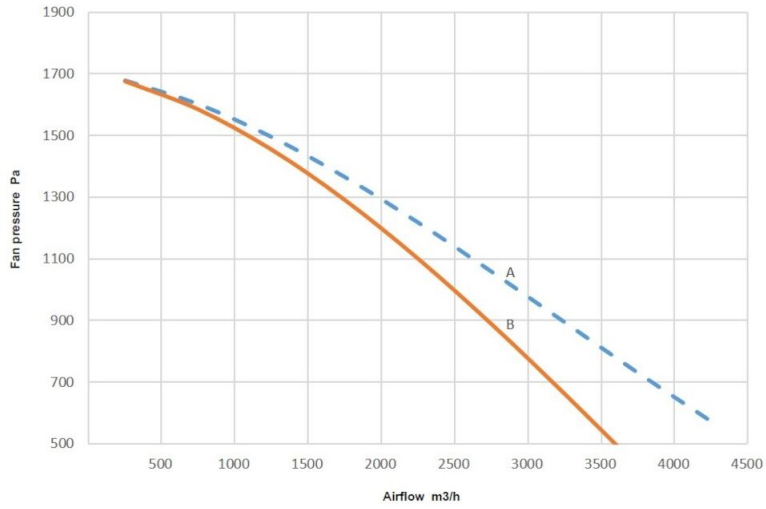

A: Total Pressure

B: Static Pressure

X: m³/h

Y: Pa

