

Fan N40



A centrifugal fan mainly designed for use with Nederman extraction products.






Note! The fan must not be used in an environment with danger of explosion or for transport of inflammable or explosive gases.

- Compact
- Easy to use





Product name	Fan N40
Noise level (dB(A))	70 at 2500 m ³ /h
Installation	Indoor, Outdoor
Material	Fan casings: Sheet metal steel Impeller: Sheet metal steel
Airflow (m ³ /h)	2500 (1,5 kW), 4000 (2,2 kW)
Ambient temperature range	-20 to +40 C (-4 F to 104 F)
Operating Temperature	Max. 60 C
No of phases	3




Fan N40

Image	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Weight (kg)	Power (kW)	Model
	230/460	60	7,3/3,6	30	2,2	14510223
	230/400	50	8/4,6	29	2,2	14510123
	230/400	50	5,5/3,2	25	1,5	14510623
	575	60	3,2	30	2,2	14511723
	380	60	4,5	29	2,2	14523121

Fan N40

Accessory		Part No
	FMS 2.5-4 Fan Manual Starter incl. motor protector 2.5-4A	14502337
	FMS 4-6.3 Fan Manual Starter incl. Motorprotector 4-6.3A	14502437
	Bracket for fan n40	14510226
	Manual fan control. 3,2 - 11,5 A, 3 phase.	14518737

Fan N40

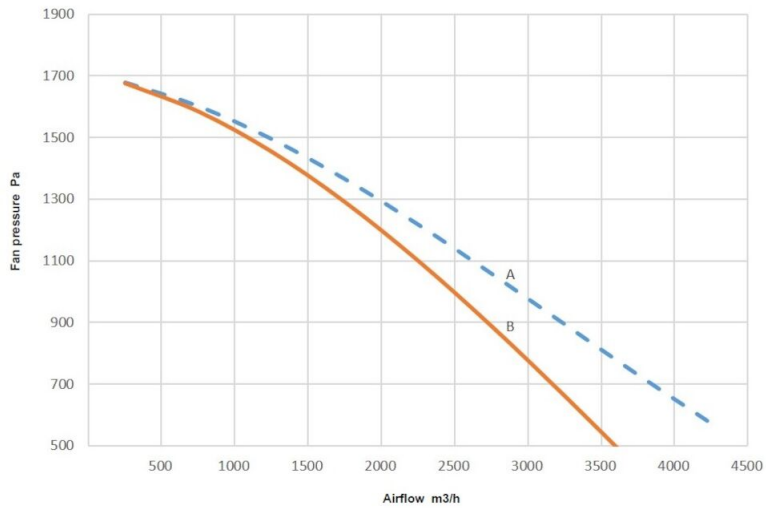

A: Total Pressure

B: Static Pressure

X: m³/h

Y: Pa

