


PRODUCT LEAFLET

Exhaust Hose NFC-3

High temperature hose

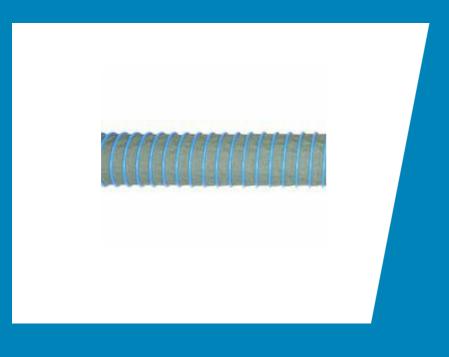

Exhaust Hose NFC-3

- Light weight and highly resistant to diesel particles
- ✓ Temperature range: Continuous use: +300 °C Short-term use: +350 °C

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

2025-05-29 2/8

Exhaust Hose NFC-3

|--|--|

2025-05-29 3/8

Models

Item number	[ItemTypeofhose]	[ItemHoseDiameter]	[ItemHoseLength]	[ItemWeight]
20822562	[NFC3]	100	2,5	
20822662	[NFC3]	100	5	
20822762	[NFC3]	100	7,5	
20822862	[NFC3]	100	10	
20822962	[NFC3]	125	2,5	
20823062	[NFC3]	125	5	
20823162	[NFC3]	125	7,5	
20823262	[NFC3]	125	10	
20823362	[NFC3]	150	2,5	
20823462	[NFC3]	150	5	
20823562	[NFC3]	150	7,5	
20823662	[NFC3]	150	10	
20823862	[NFC3]	200	10	
20823762	[NFC3]	200	5	

Models

Item number	[ItemTypeofhose]	[ItemHoseDiameter]	[ItemHoseLength]	[ItemWeight]
20824862	[NFC3]	200	7,5	17,3

Accessories


	Accessory	Item number
40	Rubber sleeve, hose clamp 4"NTP,2pc	20376475
80	Rubber sleeve,hose clamp 5" NTP 2pc	20376382
	Y-pipe Ø100/100/100	20376647
	Hose coupling 100 (4")	20947410
	Hose coupling 125 (5")	20948710
	Hose coupling 150 (6")	20948810
	Hose coupling 200 (8")	20948910
	Quick coupling D=100 (4") male	20947710
	Quick coupling D=100 (4") female	20948110
-	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	Reduction 200mm-150mm	20374284
	Connector 6"-5". steel.	20344353
This co	intent is protected under copyright law, furnished for informational use only, and subject to change wi	thout notice. © Nederman Holding AB

Nederman

Accessories

Accessory	Item number
Connector 5"-4". steel.	20344354
Connector 4"-3". steel.	20342483
Junction pipe d=160	20371413
5in Clip Grip/Bridge Hose Clamp	87000932
Bend 8"	20371927
Safety coupling ø100 (4")	20373797
Hose Suspension DN 125	20373608
Hose suspension DN 100	20373607
Safety coupling ø150 (6")	20373798
Hose suspension DN 150	20373609

2025-05-29 7/8

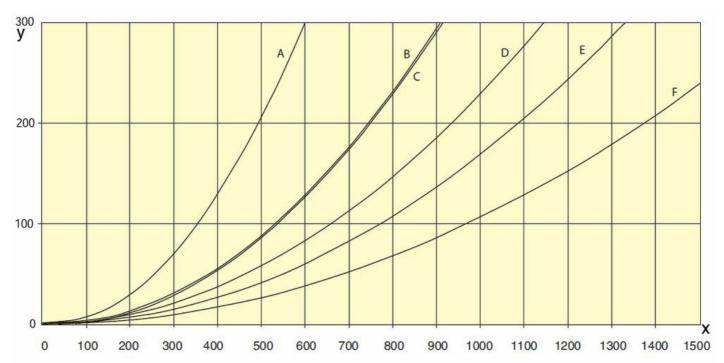

Y = Pressure drop Pa/m X = Airflow m3/h A= \emptyset 100 mm (4") on reel B= \emptyset 100 mm (4") straight C= \emptyset 125 mm (5") on reel D= \emptyset 125 mm (5") straight E= \emptyset 150 mm (6") on reel F= \emptyset 150 mm (6") straight