

PRODUCT LEAFLET

# Extraction Arm Standard

For working environments with fumes, vapours or non explosive dust



## Extraction Arm Standard




- ✓ The arm is flexible in all directions and simple to position
- ✓ Designed for wall mounting and suspended by an integrated wall bracket 90 degree bend
- ✓ Allows rotation of 180 degrees (360 degrees for the 4m arm)
- ✓ Can be equipped with a damper placed in the bend as an accessory (not 4m arm)
- ✓ The hood can be tilted in all directions

Nederman Extraction Arm Standard is specially designed for working environments with fumes, vapours or non explosive dust, where the demands for higher airflows and temperatures are moderate. Typical workplaces can be welding schools, different types of applications in light production. The applications can be welding, grinding, or other industrial processes where an easily positioned arm is required. The arm is available in three lengths, 2, 3 and 4 m (7, 10 and 13 ft.) and equipped with a high efficiency extraction hood.

# Extraction Arm Standard



[ProductCertifications]	[ce]
[ProductStandards]	ISO 21904
[ProductNoiselevel]	67
[ProductInstallation]	[Indoor]
[ProductFumeTemperature]	Max 70° Celsius
[ProductExtractionArmdiameter]	160
[ProductAirflow]	600 - 900


## Models

	Item number
	10500238
	10500338
	10500538 <sup>[1]</sup>

<sup>[1]</sup> Additional wall bracket needed. (Swivels 360 deg.)

## Accessories

	Accessory	Item number
	Damper for Standard arm	10500438
	Kit Fan Bracket Standard	10374218

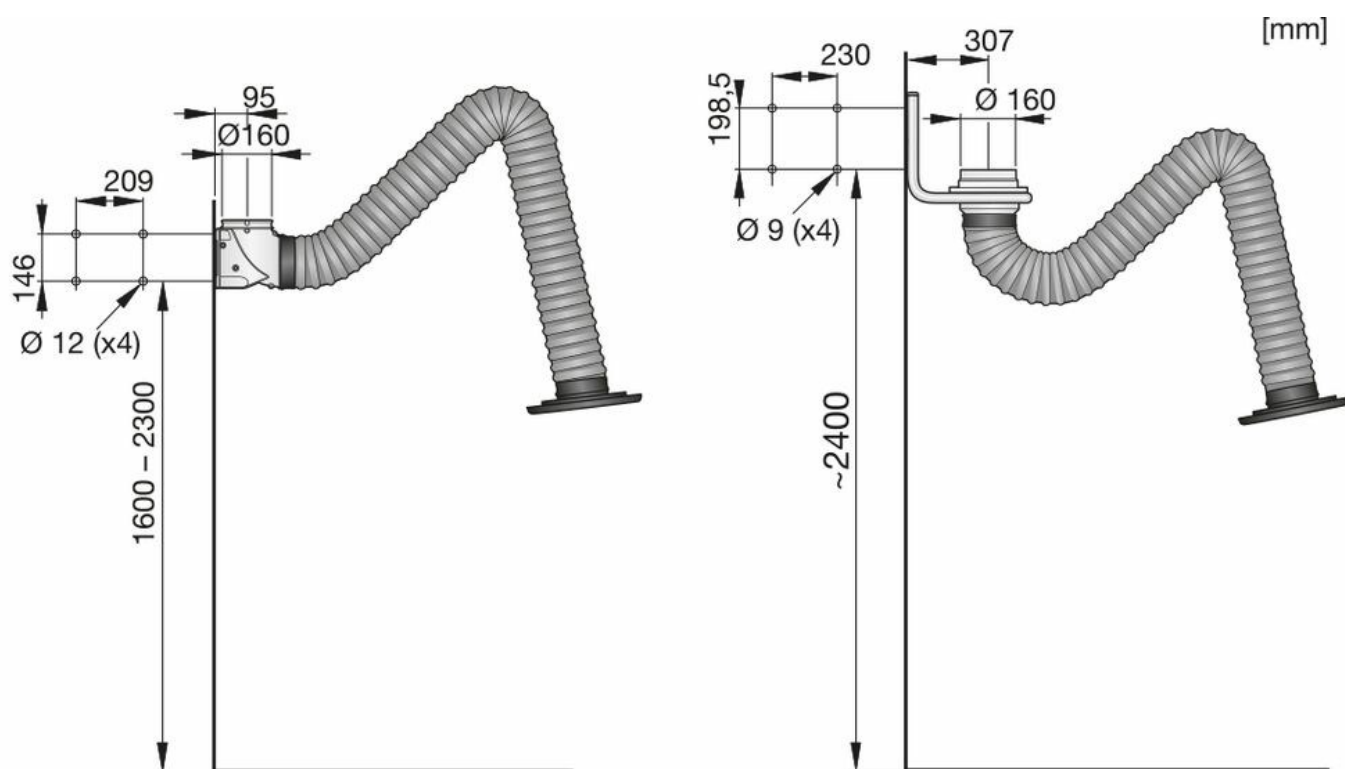

Left: Standard arm 2 & 3m. Right: Standard arm 4 m.

