

PRODUCT LEAFLET

ALU 150/250

适用于行驶中车辆的先进尾气抽排系统



ALU 150/250

- ✓ 高质量组件
- ✓ 两种标准轨道尺寸
- ✓ 抽排设备的全套配件
- ✓ 大风量

ALU 150/250 是用于高频使用的先进排气导轨系统，专为满足汽车制造商和检测中心等机构的要求而开发。ALU 150/250 具有强大的功能，例如自动断开喷嘴连接。安装喷嘴成为了唯一的手动任务。注意！当使用直轨解决方案与行驶中的车辆相结合时，必须在轨道系统末端安装液压限位装置（附件）。如果长度大于 50 米，请联系尼的曼经销商。

ALU 150/250

证书	CE
----	----

Models

	Item number	软管类型
	20900510 ^[1]	
	20900610 ^[2]	
	20900710 ^[3]	
	20900810 ^[4]	
	20900910 ^[5]	
	20901010 ^[6]	
	20901110 ^[7]	
	20901210 ^[8]	
	20901310 ^[9]	
	20901410 ^[10]	
	20901510 ^[11]	
	20901610 ^[12]	
	20901710 ^[13]	
	20901810 ^[14]	

Models

	Item number	软管类型
	20901910 ^[15]	
	20902010 ^[16]	
	20950010 ^[17]	
	20950110 ^[18]	
	20950210 ^[19]	
	20950310 ^[20]	
	20950410 ^[21]	
	20950510 ^[22]	
	20950610 ^[23]	
	20950710 ^[24]	
	20950810 ^[25]	
	20950910 ^[26]	
	20951010 ^[27]	
	20951110 ^[28]	

Models

	Item number	软管类型
	20951210 ^[29]	
	20951310 ^[30]	
	20951410 ^[31]	
	20951510 ^[32]	
	20900310 ^[33]	NR-CP
	20900410 ^[33]	NR-CP
	20902610 ^[33]	NR-CP
	20902710 ^[34]	NR-CP

^[1] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 2 个 端盖2个 限位器2个 橡胶条2.5米 用于轨道组装的紧固件。

^[2] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 2 个 端盖2个 限位器2个 橡胶条5米 用于轨道组装的紧固件。

^[3] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 3 个 端盖2个 限位器2个 橡胶条7.5米 用于轨道组装的连接件和紧固件套件。

^[4] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 3 个 端盖2个 限位器2个 橡胶条10米 用于轨道组装的连接件和紧固件套件。

^[5] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 4 个 端盖2个 限位器2个 橡胶条12.5米 用于轨道组装的连接件和紧固件套件。

^[6] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 4 个 端盖2个 限位器2个 橡胶条15米 用于轨道组装的连接件和紧固件套件。

^[7] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 5 个 端盖2个 限位器2个 橡胶条17.5米 用于轨道组装的连接件和紧固件套件。

^[8] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 5 个 端盖2个 限位器2个 橡胶条20米 用于轨道组装的连接件和紧固件套件。

^[9] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 6 个 端盖2个 限位器2个 橡胶条22.5米 用于轨道组装的连接件和紧固件套件。

^[10] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 6 个 端盖2个 限位器2个 橡胶条25米 用于轨道组装的连接件和紧固件套件。

^[11] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 7 个 端盖2个 限位器2个 橡胶条27.5米 用于轨道组装的连接件和紧固件套件。

^[12] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 7 个 端盖2个 限位器2个 橡胶条30米 用于轨道组装的连接件和紧固件套件。

^[13] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 8 个 端盖2个 限位器2个 橡胶条35米 用于轨道组装的连接件和紧固件套件。

^[14] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 9 个 端盖2个 限位器2个 橡胶条40米 用于轨道组装的连接件和紧固件套件。

^[15] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 10 个 端盖2个 限位器2个 橡胶条45米 用于轨道组装的连接件和紧固件套件。

^[16] 尾气抽排直轨 ALU 150，含悬挂支架。天花板支架 11 个 端盖2个 限位器2个 橡胶条50米 用于轨道组装的连接件和紧固件套件。

^[17] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 2 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 2,5m, fasteners for rail assembly.

^[18] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 2 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 5m, fasteners for rail assembly.

^[19] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 3 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 7,5m, kit connections and fasteners for rail assembly.

^[20] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 3 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 10m, kit connections and fasteners for rail assembly.

^[21] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 4 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 12,5m, kit connections and fasteners for rail assembly.

^[22] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 4 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 15m, kit connections and fasteners for rail assembly.

^[23] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 5 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 17,5m, kit connections and fasteners for rail assembly.

^[24] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 5 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 20m, kit connections and fasteners for rail assembly.

^[25] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 6 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 22,5m, kit connections and fasteners for rail assembly.

^[26] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 6 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 25m, kit connections and fasteners for rail assembly.

^[27] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 7 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 27,5m, kit connections and fasteners for rail assembly.

^[28] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 7 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 30m, kit connections and fasteners for rail assembly.

^[29] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 8 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 35m, kit connections and fasteners for rail assembly.

^[30] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 9 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 40m, kit connections and fasteners for rail assembly.

^[31] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 10 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 45m, kit connections and fasteners for rail assembly.

^[32] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 11 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 50m, kit connections and fasteners for rail assembly.

^[33] 发货含小车、平衡器、尾气软管与吸嘴。软管类型 NR-CP。


^[34] Delivered with trolley, balancer, exhaust hose and nozzle.

Accessories


	Accessory	Item number
	可分离导轨, ALU 150/250	20940810
	液压限位器, 用于ALU 150/250尾气抽排	20941410
	支架的悬挂转换接头, 5 个	20940110
	墙面安装支架, 600mm(Z)	20947510
	内支架, 用于ALU150/250尾气抽排导轨	20941110
	导轨加强件	20373942
	Maxi尾气抽排滑车	20940310
	尾气抽排 滑车, 用于焊烟吸收活动臂	20940210
	支架, 用于标准型平衡器滑车	20941310
	MAXI平衡器支架	20941210
	尾气抽排小车 ALU150 Std ø150	20943210
	尾气抽排小车 ALU150 ø150 标准风罩	20943410
	尾气抽排滑车, 盘管器安装在导轨上,	20948610
	AutoStart Transmitter (One for each vehicle)	89115580
	终端连接 ALU 150带盘管器	20816264
	Extractor side ALU 250 Ø250 with hose	20377374

Accessories

	Accessory	Item number
	Kit connection ALU 250	20377371
	Extractor top side Ø250 with hose	20377373
	Extractor top Ø250 W/hose	20377372
	连接件, ALU150, 套件	20373413
	Ceiling Support bracket 5pcs, ALU250	20377370

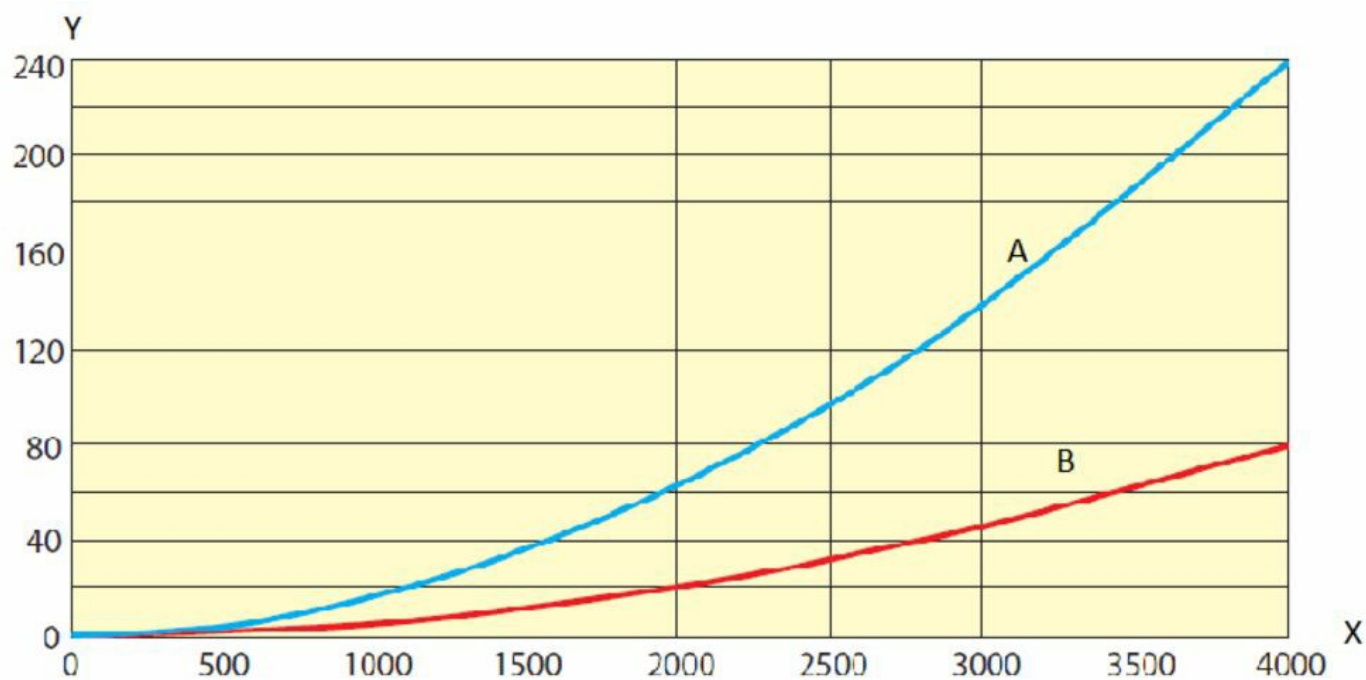

Y= Pressure drop (Pa), X= air flow (m³/h) A = ALU Ø150 mm B = ALU Ø250 mm

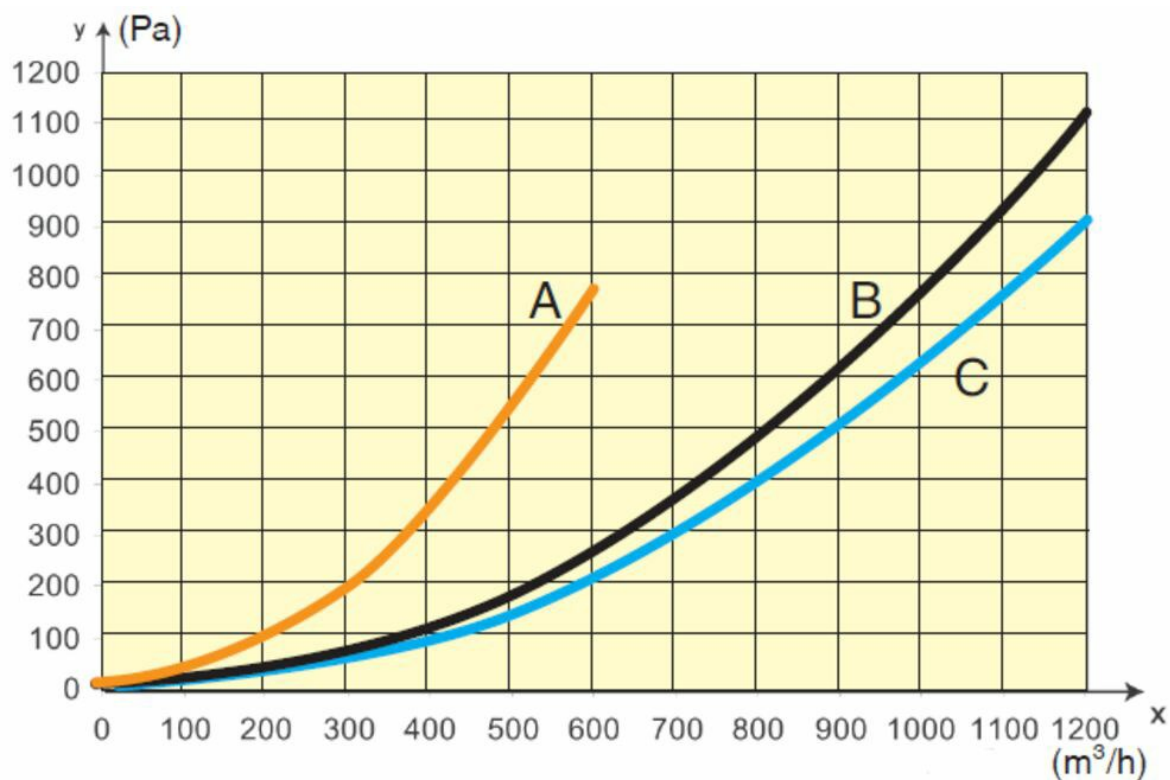

Pressure drop extraction units with A= hose Ø100 mm, 5 m B= hose Ø150 mm, 7.5 m C= hose Ø150 mm, 5 m

