

PRODUCT LEAFLET

# Magna Track ST

Exhaust extraction system for emergency stations with fewer runs



## Magna Track ST



- ✓ Capacity: 1 vehicle per system
- ✓ Exhaust pipes: low level tail pipes
- ✓ Normal exit speed up to 15 km/h - 10 mph
- ✓ For reverse-in (or drive-through)
- ✓ Optional automatic start/stop device that offers: - Practical control of fan start/stop - Safe control of air quality (source ventilation automatically starts when vehicle engine starts) - Simple programming - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

MagnaTrack ST is designed for stations with fewer runs. The free-hanging exhaust hose is equipped with a swivel attached to a balancer, which moves on the guide track. A switch on the track separates the entire hose assembly from the vehicle in a one-step process, minimizing stress or strain from the vehicle to the exhaust hose or ceiling brackets. MagnaTrack ST is available in lengths from 6 to 12 m (20 to 40 ft) and it fits vehicles with low mounted exhaust pipes.

# Magna Track ST











[ProductCertifications]	[ce]
[ProductTechnicalData]	Nozzle Ø: 160mm Nozzle hose length: 0,6m

Models

	Item number
	20807264 <sup>[1]</sup>
	20807164 <sup>[1]</sup>
	20807364 <sup>[1]</sup>
	20807464 <sup>[1]</sup>


<sup>[1]</sup> Including - Aluminum track (1), Mounting brackets for 2.4 m distance (2), Rubber stop (3), Sliding block (4), Balancer (5), Swivel (6), Hose connector, Exhaust hose (7), Low level nozzle (8), Electro-magnet assembly (9), Anchor plate (10), Disconnection switch (11), Transformer (12)

## Accessories

	Accessory	Item number
	Anchor plate for magnatrack.	20372003
	Anchor plate shutter	20371853
	Anchor plate, shutter, in 3 parts	20371868
	Radio transmitter vehicle GHz	20376723
	Radio Receiver GHz	20376724
	Handheld radio transmitter GHz	20376725
	Program kit for radio system	20376726
	Hose protection ø130/160 (Pair)	20374428
	Twist support, HL nozzle	20374364
	Lengthening shaft, HL nozzle	20374359
	Nozzle Oval 160mm 600 C-C	86900371
	Flex Noz ONLY 6"w 9"opening2007en	89298061
	Flex Nozzle only, 8 inch opening	89298064
	3HP/3PH/208-230V Auto-Start Control Console	89116051
	Aut-StCtrPnl3Hp/1Ph/208-230Vw/ASlbd	89116050
	Aut-StCtrPnl5Hp/1Ph/208-230Vw/ASlbd	89116052

## Accessories

Accessory	Item number
Flex Noz ONLY 6"w10"opening2007en	89298065

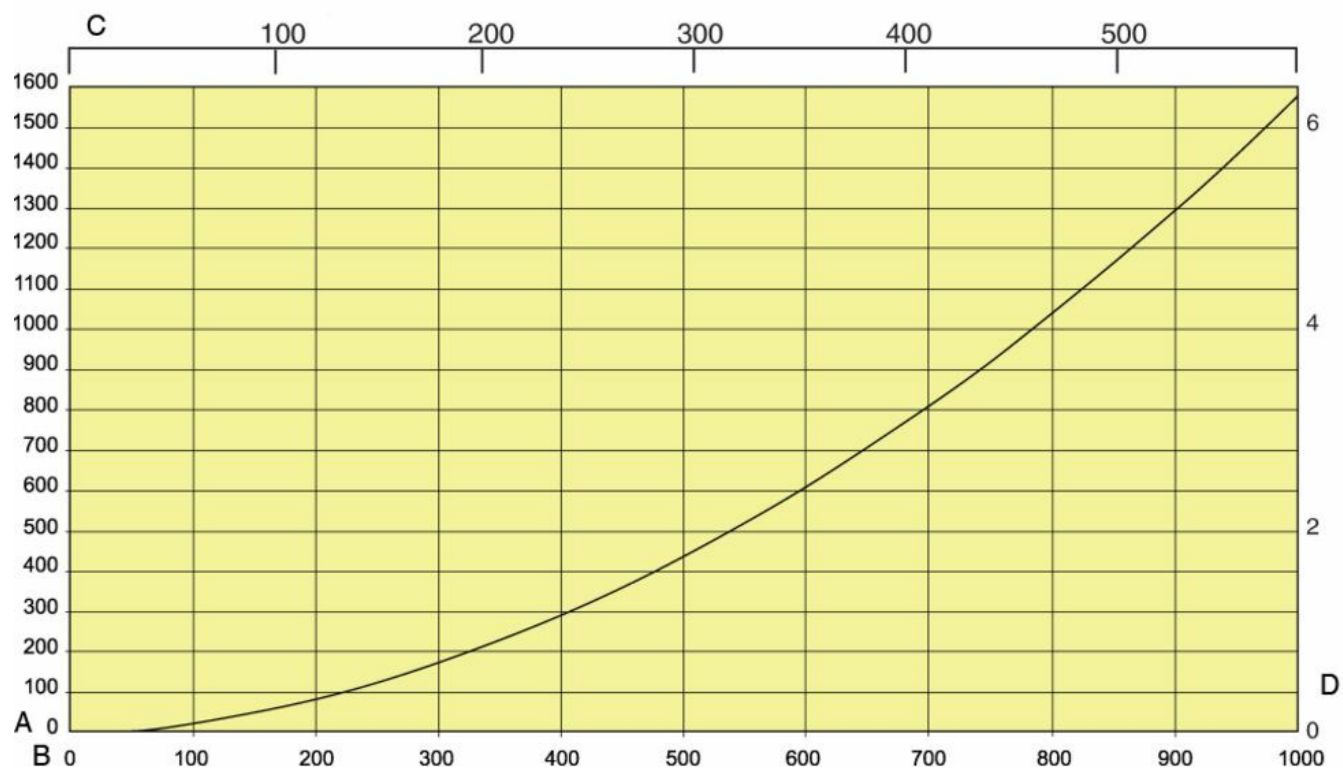

Pressure drop A: Pa B: m³/h C: CFM D: W.C Pressure drop valid for 6 and 7 m track with 5 m hose, Ø 125 mm, and HB 600LL nozzle.  
Airflow recommendations: Heavy vehicles: 1000 - 1200 m³/h Car / SUV: 400 - 600 m³/h

