

PRODUCT LEAFLET

OSF 1000 FC

FibreDrain® 可持续运行的油雾收集设备



OSF 1000 FC

- ✓ 三级滤芯单元
- ✓ 观测每层滤芯单元的压强下降
- ✓ 紧凑的设计
- ✓ 2个进风口Ø 200mm, 卡箍连接
- ✓ 包含启动装置和电机保护

尼的曼Nederman OSF 油雾过滤器为处理持续运行中产生的大量纯油雾而设计, 为高效过滤且低维护成本而研发。

尼的曼标准Nederman OSF 1000 FC有3级滤芯单元, 其中上面两级单元由尼的曼Nederman的FibreDrain®专利技术的滤芯单元组成。

尼的曼Nederman有各种不同类型的过滤单元来适配各种不同应用。第三级滤芯单元由一个H13的HEPA滤芯组成, 根据EN1822, 对MPPS的过滤效率达99.95%。OSF 1000 FC有内置离心风机。

OSF 1000 FC


证书	CE
标准	2009/125/EC
噪音水平 (分贝)	服务门端 50 Hz: 65 dB(A) @1,5 m 服务门端 60 Hz: 67 dB(A) @1,5 m
保护等级	IP55
过滤效能 (%)	99.95
安装	室内
材料	金属板, 内外粉刷
清灰方式	自动排水
工作压力 (千帕)	Max 2500 Pa
性能 (最大风量 m ³ /h)	1000
工作温度	40 deg C (inbuilt fan)

Models


	Item number	电压(V)	频率 (Hz)	电源相数	滤芯数量	安培数(安)	[ItemNoiselevel]	重量(公斤)
	12400005	230/400	50	3	3	4,2 / 2,4	65	200
	12400973	460	60	3	3	1,98	67	200
	12400196	230/400	50	3	3	4,2 / 2,4	65	200
	12400956	460	60	3	3	1,98	67	200
	12401197	460	60	3	3	4.2		
	12401219	460	60			4.2		

Accessories

	Accessory	Item number
	排泄泵箱, 50 Hz	12400054
	Drain container with piping	12400764
	FibreDrain 过滤器 F66 OSF 1	12400006
	FibreDrain 过滤器 F66 OSF 2	12400007
	HEPA Filter H13; 610x610x150mm	12400852
	High capacity HEPA-filter kit for FC: 4 pcs distance holders and 1 pc HEPA filter 610x610x292mm	12400984
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm	12400726
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x150mm	12400959
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	Frequency inverter with 2 kPa pressure sensor. 1,5kW. IP66 enclosure	73008913

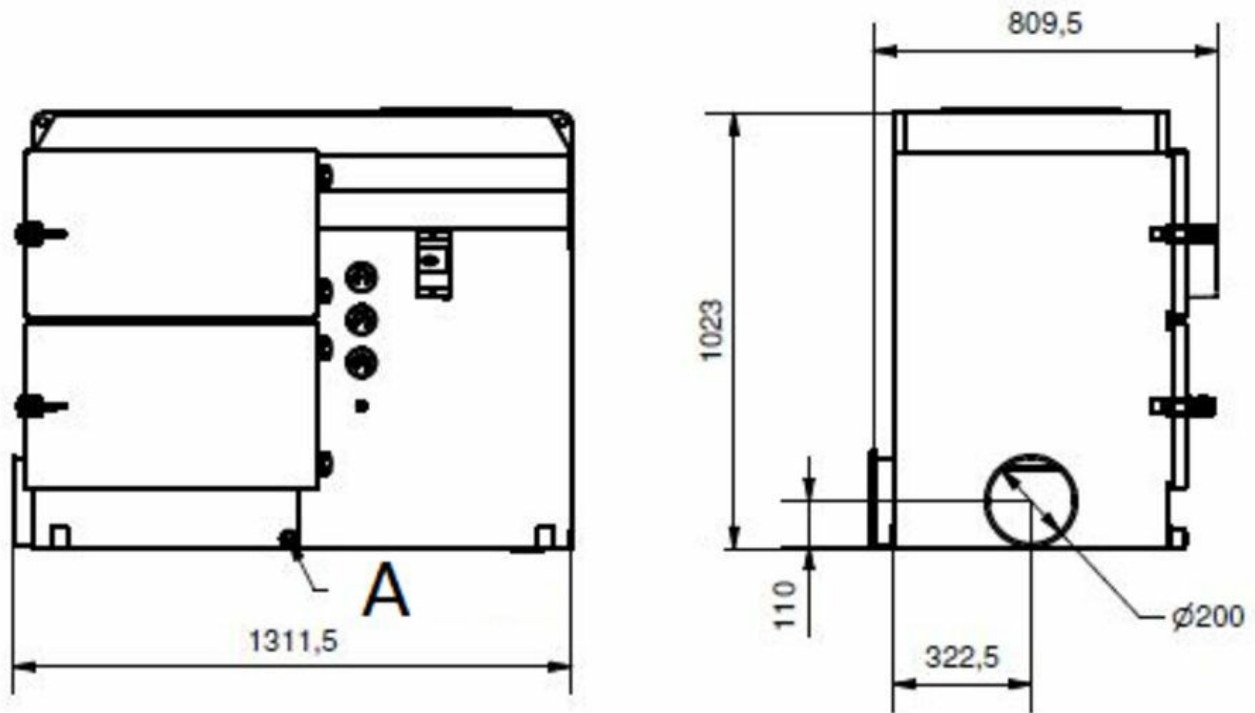

A) Drain stud (x2)

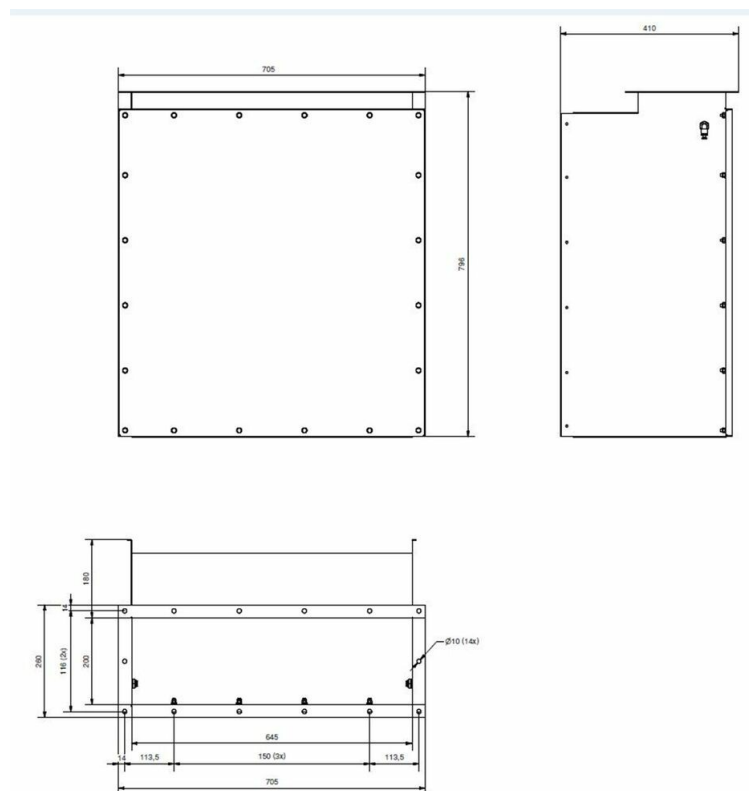

出口接头 OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm

