

PRODUCT LEAFLET

OMF 4000

FibreDrain® 可持续运行的油雾收集设备



OMF 4000

- ✓ 三级滤芯单元, 可选预过滤
- ✓ 观测每层滤芯单元的压强下降
- ✓ 延长支脚
- ✓ 2个进风口Ø 315mm, 卡箍连接

尼的曼OMF, 油雾过滤器为处理持续运行中产生的大量纯油雾而设计, 为高效过滤且低维护成本而研发。

尼的曼标准OMF 4000 有三级滤芯单元, 其中第一级单元由尼的曼Nederman的FibreDrain®专利技术的滤芯单元组成

尼的曼Nederman有各种不同类型的过滤单元来适配各种不同应用。第三级滤芯单元由一个H13的HEPA滤芯组成, 根据EN1822, 对MPPS的过滤效率达99.95%。所有尼的曼OMF 为竖直结构, 并且可以根据需要配置预过滤单元。OMF 4000 顶部装有离心风机。

OMF 4000

证书	CE
标准	2009/125/EC
噪音水平(分贝)	服务门端 50/ 60 Hz: 70 dB(A) @1,5 m. 配外部消音器
保护等级	IP55
过滤效能(%)	99.95
安装	室内
材料	金属板, 内外粉刷
工作压力(千帕)	Max 4000 Pa
性能(最大风量m3/h)	4000
电源相数	3
滤芯数量	6
[ItemNoiselevel]	70
重量(公斤)	350
功率(kW)	7,5


Models

	Item number	电压(V)	频率 (Hz)	安培数(安)
	12400030 ^[1]	400/690	50	13 / 7,5
	12400964 ^[2]	460	60	14.2

^[1] 加2个可选过滤项, 包括延长支脚
^[2] 加2个可选过滤项。包括延长支脚

Accessories

	Accessory	Item number
	排泄泵箱, 50 Hz	12400054
	Drain container with piping	12400764
	OMF/OSF 消音器 90/Ø315	12400016
	Transition NF 7,5 kW / Ø 315 / 1005	12400988
	预滤器, ORF 610x610x96 G4I	12400039
	FibreDrain 过滤器 F66 OMF 1	12400009
	FibreDrain 过滤器 F66 OMF 2	12400010
	HEPA, DCM H13 595x595x100	12400012
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 7,5kW. IP66 enclosure	73008917
	Frequency inverter with 5kPa pressure sensor. 11kW. IP66 enclosure.	73008918

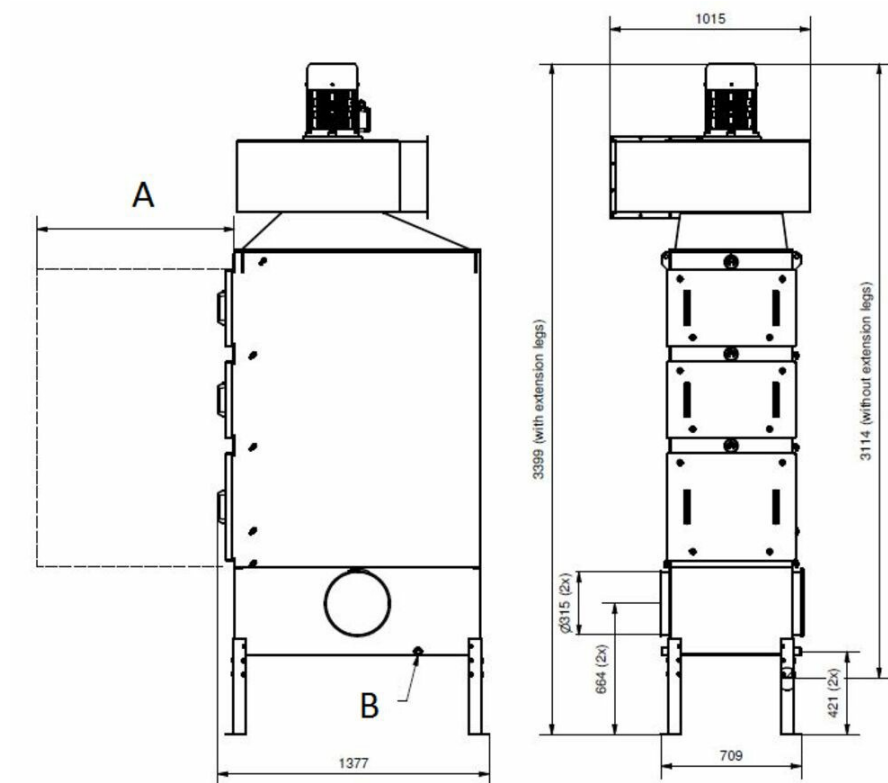

A) 1000mm维修空间 B) 排液口 DN25 (2x)

