

PRODUCT LEAFLET

OMF 6000

FibreDrain® oil mist collector for continuous operation.



OMF 6000

- ✓ Three filter stages, optional pre-filter
- ✓ Gauges for reading of pressure drop over each filter stage
- ✓ Extension legs
- ✓ Two inlet inlet ø 400 mm with clamp ring connection



Nederman OMF oil mist collectors are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.

Nederman OMF 6000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OMF units are prepared for use of pre filter. OMF 6000 have a top mounted radial fan.

OMF 6000















[ProductCertifications]	[ce]
[ProductStandards]	2009/125/EC
[ProductNoiselevel]	50/ 60 Hz: 70 dB(A) @1,5 m from service side with ext. Silencer
[ProductProtectionclass]	IP55
[ProductFilterefficiency]	99.95
[ProductInstallation]	[Indoor]
[ProductMaterial]	Sheet metal, painted both in- and outside.
[ProductWorkingpressure]	Max 4500 Pa
[ProductCapacityMax]	6000
[ProductOperatingTemperature]	60 deg C (limited by filter)


Models

	Item number	[ItemPowerVoltage]	[ItemFrequency]	[ItemNoofphases]	[ItemNbrofFilterElements]	[ItemAmperage]
	12400036 ^[1]	400/690	50	3	9	19,5 / 11,3
	12400967 ^[1]	460	60	3	9	20.5

^[1] Plus 2 optional filter elements. Incl extension legs.

Accessories

	Accessory	Item number
	Drain pump box, 50 Hz	12400054
	Drain container with piping	12400764
	OMF/OSF Silencer 90/Ø500	12400038
	Transition NF 11kW/ Ø500/1005	12400989
	FibreDrain Pre Filter ORF 610x610x96 G4	12400039
	FibreDrain Filter 1 OMF; 600x600x292mm	12400009
	FibreDrain Filter 2 OMF; 600x600x292mm	12400010
	Hepa DCM H13 610x610x292 mm	12400012
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 11kW. IP66 enclosure.	73008918
	Frequency inverter with 5kPa pressure sensor. 15kW. IP66 enclosure	73008919

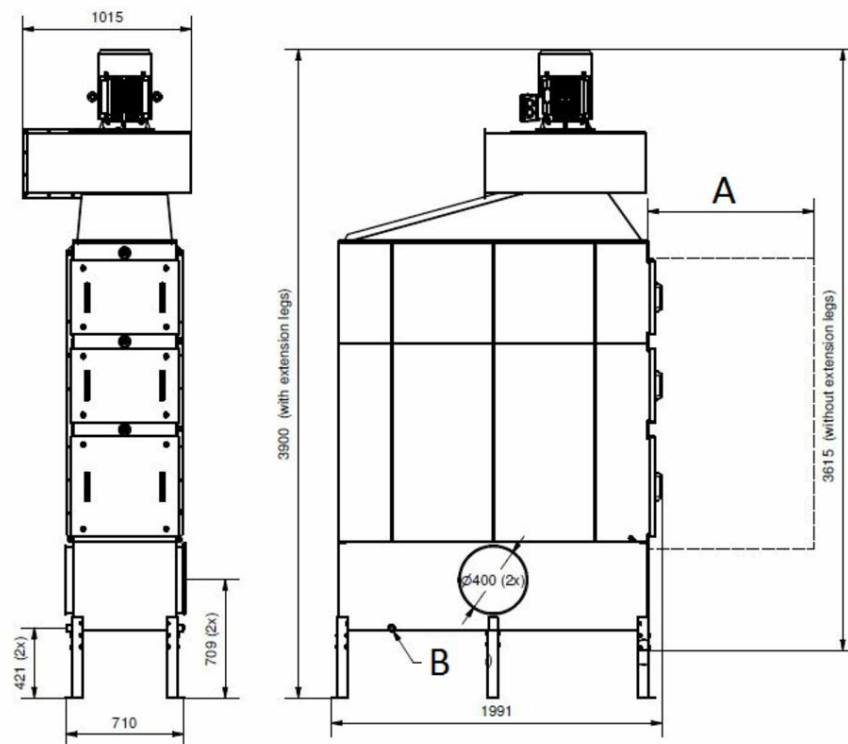

A) 1000 mm filter service space B) Drainage DN25 (2x)

