

PRODUCT LEAFLET

OMF-FC 2000

FibreDrain® 可持续运行的油雾收集设备



OMF-FC 2000

- ✓ 三级滤芯单元
- ✓ 观测每层滤芯单元的压强下降
- ✓ 紧凑的设计
- ✓ 2个进风口Ø 200mm, 卡箍连接
- ✓ 包含启动装置和电机保护

尼的曼OMF, 油雾过滤器为处理持续运行中产生的大量纯油雾而设计, 为高效过滤且低维护成本而研发。

尼的曼标准OMF 2000 FC 有三级滤芯单元, 其中上两级单元由尼的曼Nederman的FibreDrain®专利技术的滤芯单元组成

尼的曼Nederman有各种不同类型的过滤单元来适配各种不同应用。第三级滤芯单元由一个H13的HEPA滤芯组成, 根据EN1822, 对MPPS的过滤效率达99.95%。OMF 2000 FC内置离心风机。

OMF-FC 2000


证书	CE
标准	2009/125/EC
噪音水平 (分贝)	服务门端 50 Hz: 66 dB(A) @1,5 m 服务门端 60 Hz: 68 dB(A) @1,5 m
保护等级	IP55
过滤效能 (%)	99.95
安装	室内
材料	金属板, 内外粉刷
清灰方式	自动排水
工作压力 (千帕)	Max 2500 Pa
性能 (最大风量 m ³ /h)	2000
电源相数	3
滤芯数量	3
重量 (公斤)	200
功率 (kW)	2,2

Models


	Item number	电压(V)	频率 (Hz)	安培数 (安)	[ItemNoiselevel]
	12400021	230/400	50	7,6 / 4,4	66
	12400974	460	60	7.9	68
	12400200	230/400	50	7,6 / 4,4	66
	12400960	460	60	7.9	68

Accessories

	Accessory	Item number
	排泄泵箱, 50 Hz	12400054
	Drain container with piping	12400764
	FibreDrain 过滤器 F66 OMF 1	12400009
	FibreDrain 过滤器 F66 OMF 2	12400010
	HEPA Filter H13; 610x610x150mm	12400852
	High capacity HEPA-filter kit for FC: 4 pcs distance holders and 1 pc HEPA filter 610x610x292mm	12400984
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm	12400726
	Outlet connection OSF 1000FC / OMF 2000FC - HEPA 610x610x150mm	12400959
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	Frequency inverter with 2kPa pressure sensor. 2,2kW. IP66 enclosure	73008914

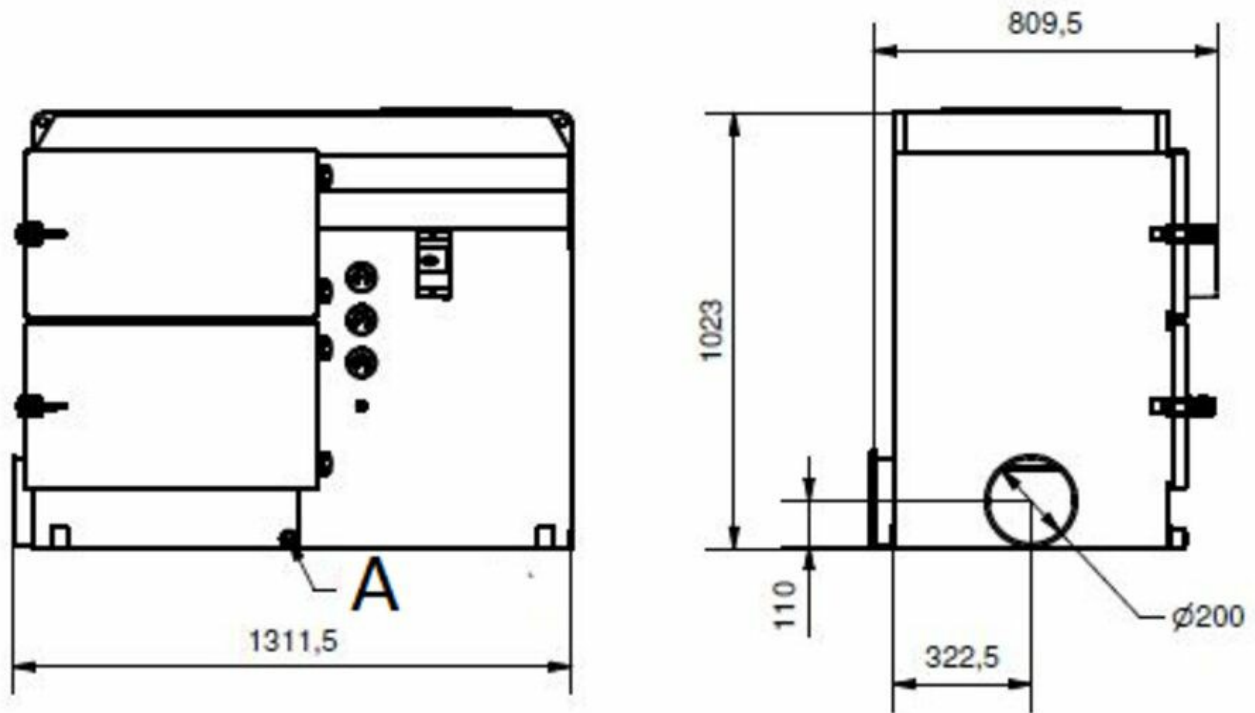

A) 排液蒙头 (x2)

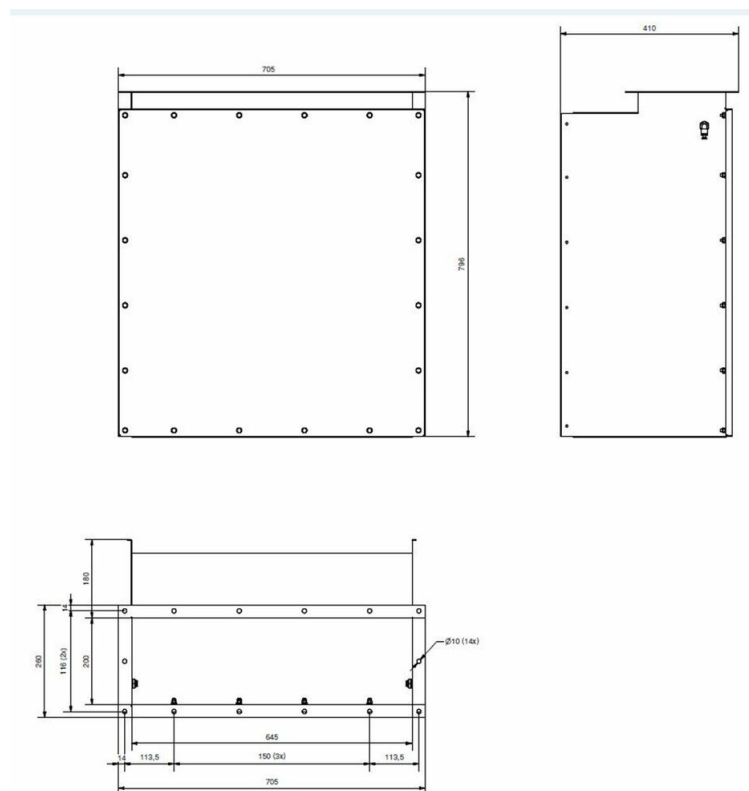

出口接头 OSF 1000FC / OMF 2000FC - HEPA 610x610x292mm

