

PRODUCT LEAFLET

OSF 3x2000 SM

FibreDrain® 可持续运行的油雾收集设备



OSF 3x2000 SM

- ✓ 三级滤芯单元, 可选预过滤
- ✓ 观测每层滤芯单元的压强下降
- ✓ Drain: 4 off 1 1/2"
- ✓ Non-vibration fan suspension system

尼的曼Nederman OSF 油雾过滤器为处理持续运行中产生的大量纯油雾而设计, 为高效过滤且低维护成本而研发。

尼的曼标准 OSF 3x2000 SM 有三级滤芯单元, 其中上面两级单元由尼的曼Nederman的FibreDrain®专利技术的滤芯单元组成。尼的曼Nederman有各种不同类型的过滤单元来适配各种不同应用。第三级滤芯单元由一个H13的HEPA滤芯组成, 根据EN1822, 对MPPS的过滤效率达99.95%。所有尼的曼Nederman OSF为竖直结构, 并且可以根据需要配置预过滤单元。OSF 3x2000 SM 有内置离心风机。

OSF 3x2000 SM

证书	CE
标准	2009/125/EC
保护等级	IP55
过滤效能(%)	99.95
安装	室内
材料	金属板, 内外粉刷
清灰方式	自动排水
工作压力(千帕)	Max 4500 Pa
性能(最大风量m ³ /h)	6000
工作温度	60 deg C (limited by filter)
电压(V)	400/690
频率(Hz)	50
电源相数	3
滤芯数量	18
安培数(安)	19,5/11,3
颜色	NCS-S 1005 B20G
重量(公斤)	1920
功率(kW)	11

Models

	Item number
	12401143 ^[1]
	12401144 ^[1]

^[1] Plus 6 可选过滤项

Accessories

	Accessory	Item number
	排泄泵箱, 50 Hz	12400054
	Drain container with piping	12400764
	预过滤器, ORF 610x610x96 G4I	12400039
	FibreDrain 过滤器 F66 OSF 1	12400006
	FibreDrain 过滤器 F66 OSF 2	12400007
	HEPA, DCM H13 595x595x100	12400012
	Inlet adapter OSF 3x2000	12401137
	Extension structure OSF 3x2000, OMF 3x4000	12401165
	Fan enclosure 2 filters in depth	12401109
	OMF/OSF 消音器 90/Ø500	12400038
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	FibreDrain Pumpbox KTF81-220 / 60Hz	12401329
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 11kW. IP66 enclosure.	73008918
	Frequency inverter with 5kPa pressure sensor. 15kW. IP66 enclosure	73008919

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB


Nederman

OSF 3x2000 SM







Nederman

OSF 3x2000 SM

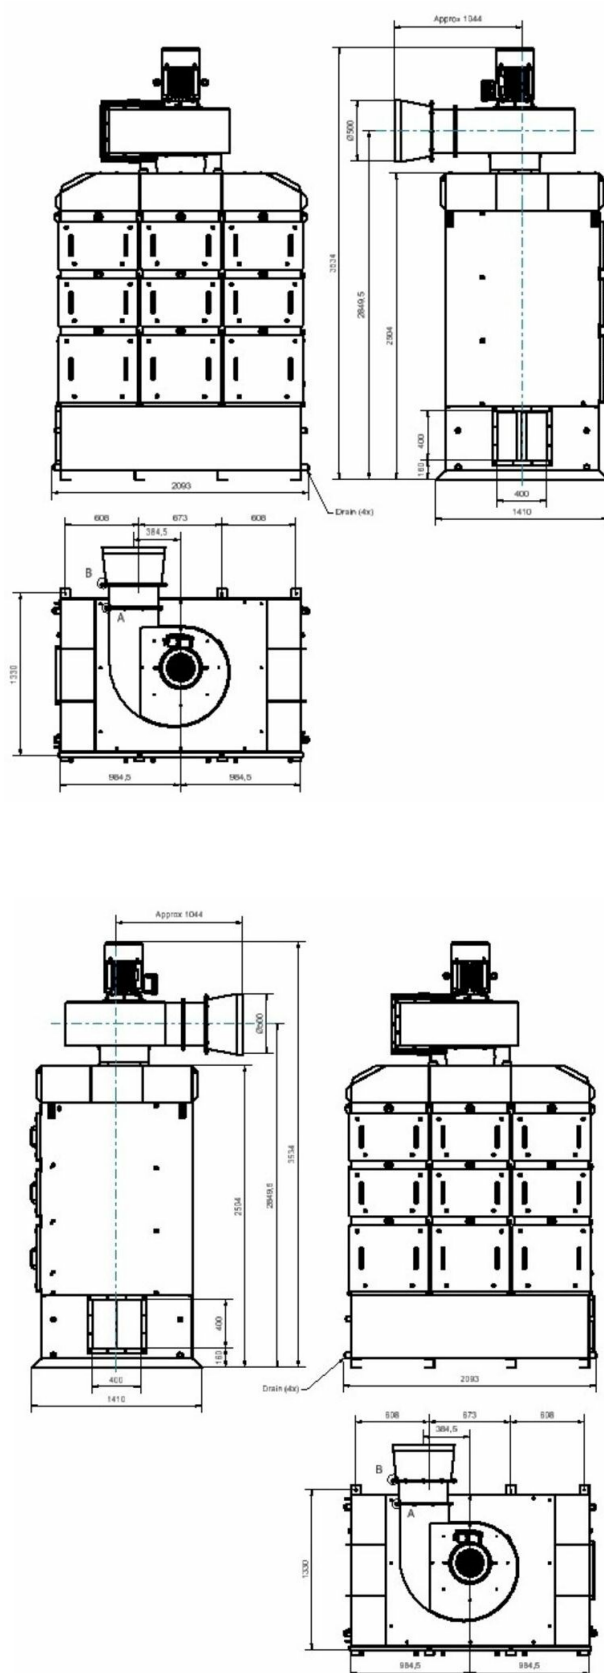

Nederman

OSF 3x2000 SM

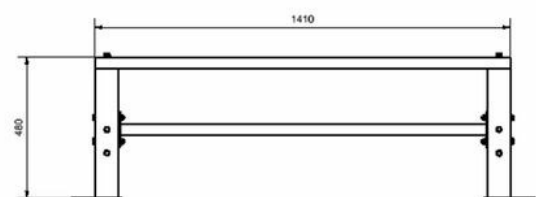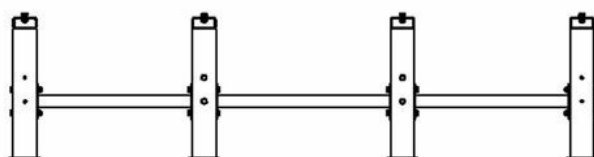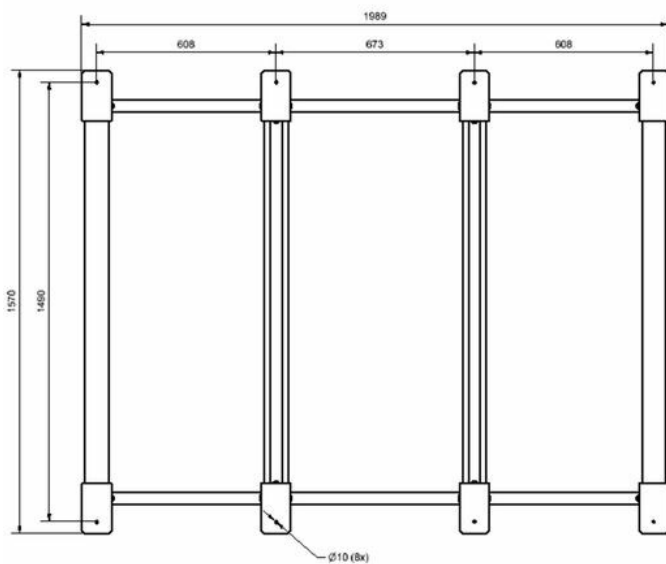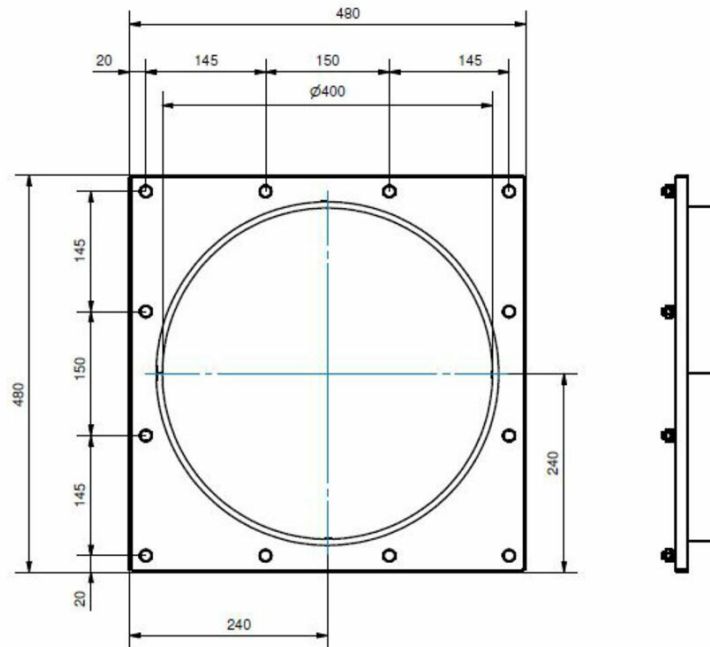

Nederman

OSF 3x2000 SM

