


Flexible Connectors for Combifab F


Flexible Connectors are designed to eliminate the vibrations from the fan to the ventilation systems and to partially compensate for the temperature deformation of ventilation ducts. They are used in ventilation installations in the temperature range from -40°C to +70°C.
For standard (impeller type R) – **galvanized version**.
For abrasive dusts (impellers type S or T) - **welded version**.
For combustible dusts - **antistatic version**.

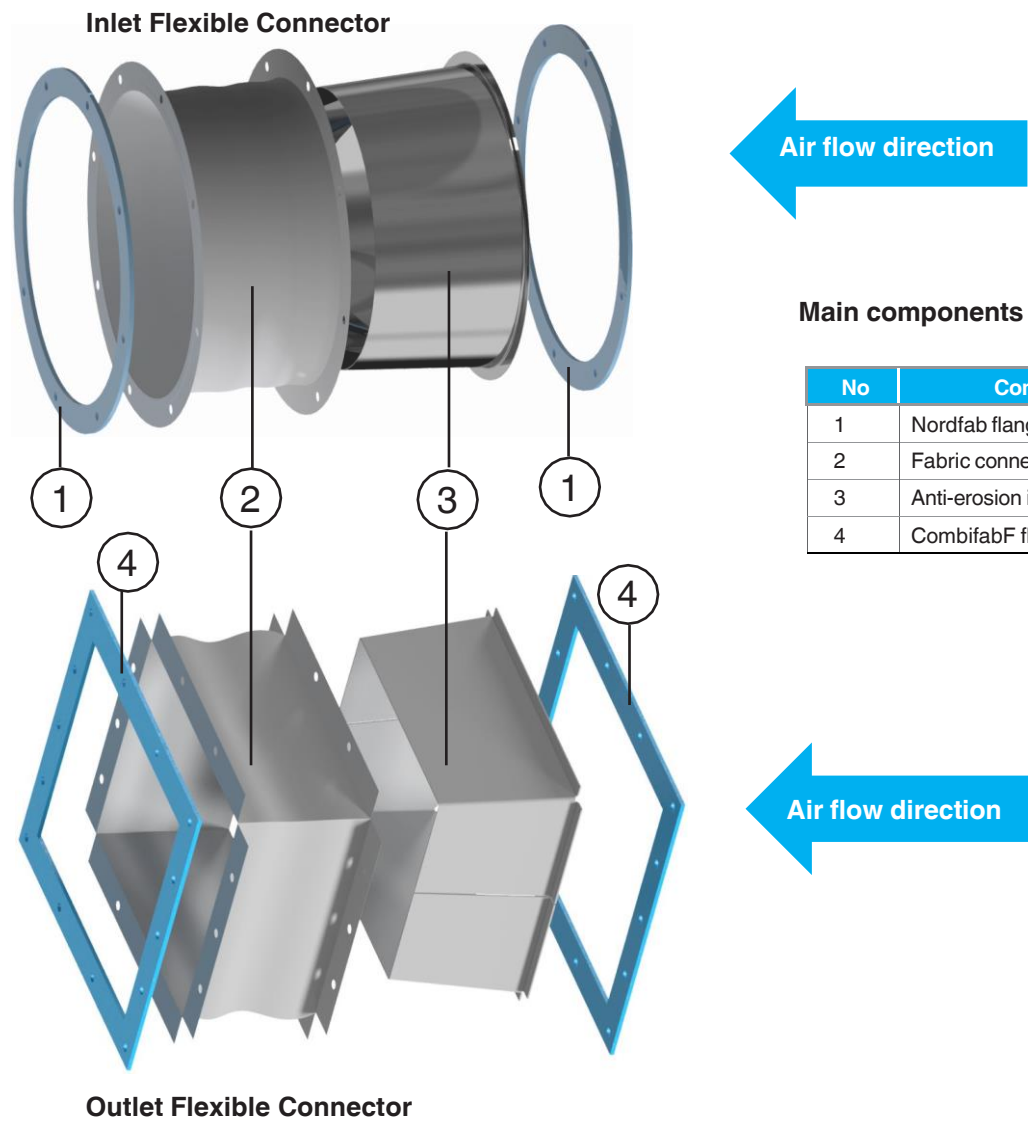

Main components

No	Component
1	Nordfab flange
2	Fabric connector
3	Anti-erosion insert
4	CombifabF flange

Dimensions

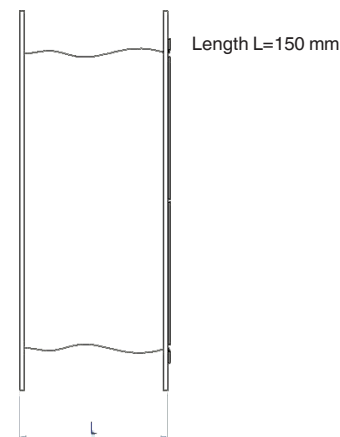

Inlet Flexible connector

Inlet size	Standard		Antistatic	
	Galvanized	Welded	Galvanized	Welded
160	73003282	7981494	7907962	7907963
180	73003283	7981495	7907964	7907965
200	73003284	7981496	7907966	7907967
224	7991461	7989946	7907968	7907969
250	73003285	7989887	7907970	7907971
280	7991462	7988151	7907972	7907973
315	73003286	7983033	7907974	7907975
355	73003287	73000253	7907978	7943169
400	73003288	73003289	7907979	7907980
450	73003290	7987099	7907981	7907982
500	73003291	7983047	7907983	7907984
560	7988368	7988535	7907985	7907986
630	73003292	73001363	7907987	7907988
710	73003293	7989890	7907989	7907990
800	7991463	7987799	7907991	7907992
900	73003294	7988541	7907993	7907994
1000	73003281	7988540	7908057	7907959
1120	7991460	7980330	7907960	7907961

Outlet Flexible Connectors

Size	Standard		Antistatic	
	Galvanized	Welded	Galvanized	Welded
40-160	73001366	73002108	7907995	7907996
40-180	7988033	73002109	7907997	7907998
40-200	73003295	73002110	7907999	7908000
40-224	73003296	73002111	7908001	7908002
40-250	7988080	7989681	7908003	7908004
40-280	7988111	7988152	7908005	7908006
40-315	73003297	73002112	7908007	7908008
40-355	73003298	73002113	7908009	7908010
40-400	73003299	7988822	7908011	7908012
40-450	7988832	7987877	7908013	7908014
40-500	7988056	73002114	7908015	7908016
40-560	7984029	7988534	7908017	7908018
40-630	7989414	73002115	7908019	7908020
56-224	7907899	73002116	7908021	7908022
56-250	7988232	73002117	7908023	7908024
56-280	73001397	73001398	7908025	7908026
56-315	73002123	73001163	7908027	7908028
56-355	73003300	73002118	7908029	7908030
56-400	73003301	7907900	7908031	7908032
56-450	73002124	73002119	7908033	7908034

Accessories

QAC020(B)

Date

2024-05-16

Nederman

Size	Standard		Antistatic	
	Galvanized	Welded	Galvanized	Welded
56-500	7988187	73002120	7908035	7908036
56-560	7988369	7983046	7908037	7908038
56-630	73003302	73002121	7908039	7908040
56-710	73003303	7980975	7908041	7908042
56-800	73002125	73000539	7908043	7908044
56-900	73003304	73002122	7908045	7908046
63-355	73003305	73009442	7908048	73009448
63-450	7908124	7908125	7908112	7908113
63-500	7988689	73009443	7908049	73009449
63-560	7908126	7908127	7908114	7908115
63-630	7982123	73009444	7908050	73009450
63-710	73003306	73009445	7908051	73009451
63-800	7908128	7908129	7908116	7908117
63-900	73003307	7988542	7908052	7908053
63-1000	7999992	7983043	73009446	7908047
71-710	7908130	7908131	7908118	7908119
71-800	7908132	7908133	7908120	7908121
71-900	7908134	7908135	7908122	7908123
71-1000	7945822	7988539	73009447	7908054
71-1120	7980329	7980331	7908055	7908056

Nederman
www.nederman.com