

## OSF 1000

FibreDrain® oil smoke collector for continuous operation.



Nederman OSF oil smoke eliminators are designed to handle large amounts of neat oil mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.

Nederman OSF 1000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OSF units are prepared for use of pre filter. OSF 1000 have an built-in radial fan.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two inlet  $\varnothing$  200 mm with clamp ring connection
- Starter and motor protection included

<b>Product name</b>	OSF 1000
<b>Standard</b>	2009/125/EC
<b>Volume (for shipping) (m³)</b>	2.45
<b>Noise level (dB(A))</b>	50 Hz: 65 dB(A) @1,5 m from service side 60 Hz: 67 dB(A) @1,5 m from service side
<b>Protection class</b>	IP55
<b>Filter efficiency (%)</b>	99,95
<b>Installation</b>	[Indoor]
<b>Material</b>	Sheet metal, painted both in- and outside.
<b>Filter cleaning method</b>	Self-Draining
<b>Working pressure (kPa)</b>	Max 2500 Pa
<b>Capacity (max airflow m³/h)</b>	1000
<b>Operating Temperature</b>	40 deg C (inbuilt fan)
<b>Power Voltage (V)</b>	230/400
<b>Frequency (Hz)</b>	50
<b>No of phases</b>	3
<b>Number of filter elements</b>	3
<b>Amperage (A)</b>	4,2 / 2,4
<b>Colour</b>	NCS-S 1005 B20G
<b>Weight (kg)</b>	245
<b>Power (kW)</b>	1,1
<b>Note</b>	Plus 1 optimal filter element. Incl extension legs



## OSF 1000

[image]	Description	[model]
	OSF 1000, Inlet 2 x ø 200 mm clamp ring left or right. Drain 2 x 1" Female	12400029*

*\*Plus 1 optimal filter element. Incl extension legs*


## OSF 1000

	[accessory]	[partno]
	Drain pump box, 50 Hz	12400054*
	Drain container with piping	12400764**
	Frequency Inverter 1,1 kW incl transmitter 0 - 2 kPa	12400845
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	FibreDrain Filter 1 OSF; 600x600x292 mm	12400006
	FibreDrain Filter 2 OSF; 600x600x292 mm	12400007
	HEPA Filter H13; 610x610x292 mm	12400012
	Outlet transition, ø 200 mm, for OSF 1000 / OSF 1000-2 / OMF 1000-2 / OMF 2000	12400904
	Outlet transition, ø 250 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400905
	Outlet transition, ø 315 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400906
	Drain pump box, 50 Hz, 10 litre/min at 10m, including controller	12401330
	OMF/OSF/MQL mounting system for electrical components	12401341

\*Drain connection must be elevated min 200 mm from pump box support level

\*\*Drain connection must be elevated min 420mm from container support level

## OSF 1000

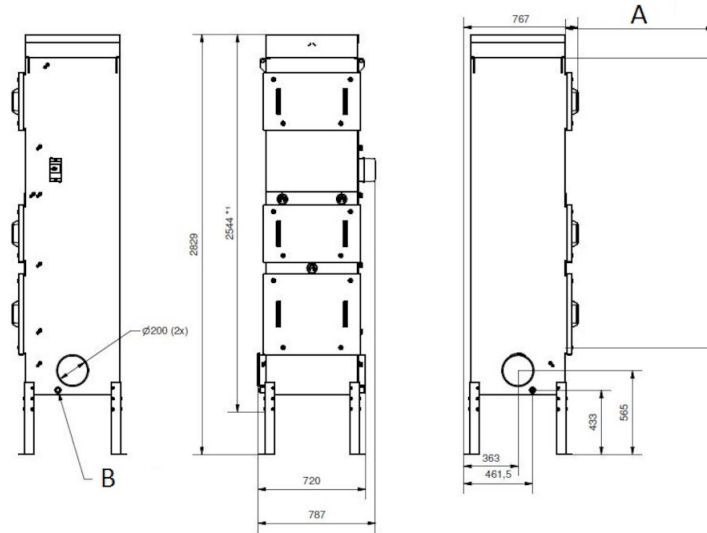

A) 1000 min filler service space

B) Drain stud (x2)