

OSF 2000

FibreDrain® oil smoke collector for continuous operation.



OSF 2000

- ✓ Three filter stages, optional pre-filter
- ✓ Gauges for reading of pressure drop over each filter stage
- ✓ Extension legs
- ✓ Two inlet \varnothing 315 mm with clamp ring connection


Nederman OSF oil smoke collectors are designed to handle large amounts of neat oil mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.

Nederman OSF 2000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OSF units are prepared for use of pre filter. OSF 2000 have a top mounted radial fan.

OSF 2000













[ProductCertifications]	[ce]
[ProductStandards]	2009/125/EC
[ProductNoiselevel]	50/ 60 Hz: 70 dB(A) @1,5 m from service side with silencer
[ProductProtectionclass]	IP55
[ProductFilterefficiency]	99.95
[ProductInstallation]	[Indoor]
Material	Sheet metal, painted both in- and outside.
Filter cleaning method	[Draining]
[ProductWorkingpressure]	Max 3000 Pa
Capacity (max airflow m ³ /h)	2000
Operating Temperature	60 deg C (limited by filter)
Power voltage (V)	400/690
Frequency (Hz)	50
No of phases	3
Number of filter elements	6
Amperage (A)	7,2 / 4,2
Weight (kg)	345
Power (kW)	4


Models

	Item no
	12400011 ^[1]

^[1] Plus 2 optional filter elements. Incl extension legs.

Accessories

	Accessory	Item no
	Drain pump box, 50 Hz	12400054
	Drain container with piping	12400764
	OSF 2000 Silencer 90/Ø250	12400014
	Transition NF 4kW/Ø250/1005	12400986
	FibreDrain Pre Filter ORF 610x610x96 G4	12400039
	FibreDrain Filter 1 OSF; 600x600x292mm	12400006
	FibreDrain Filter 2 OSF; 600x600x292mm	12400007
	Hepa DCM H13 610x610x292 mm	12400012
	FibreDrain Pumpbox KTF82-200 / 50Hz	12401330
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 2kPa pressure sensor. 4kW. IP66 enclosure	73008915

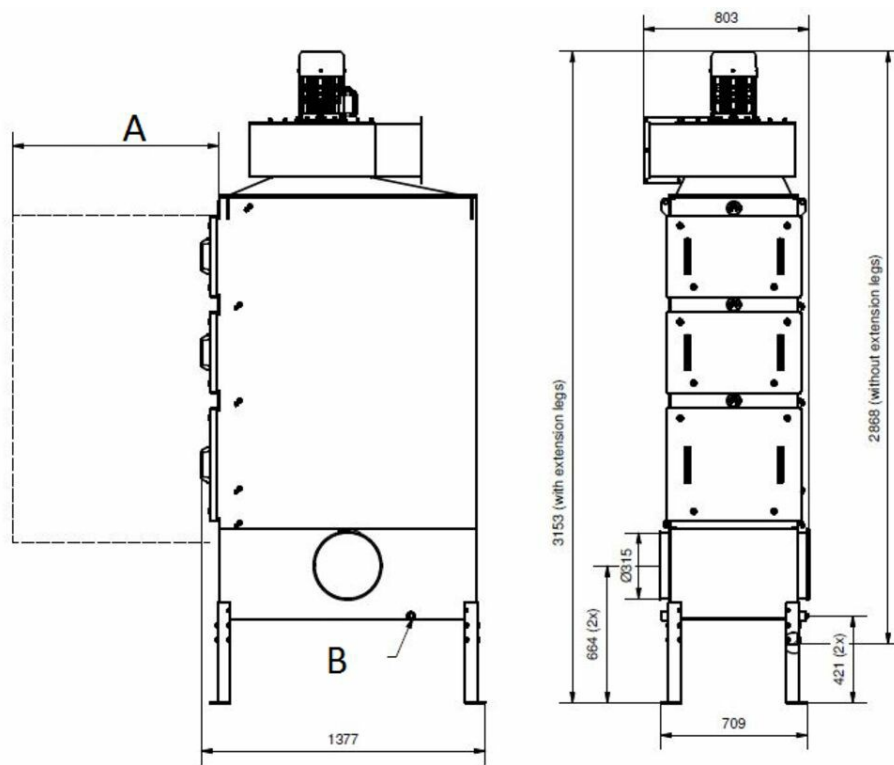

A) 1000 mm min filler service space B) Drainage DN25 (2x)